

网络接口产品选型手册

Network Connector Product Selection Guide



集成式RJ45系列
Integral RJ45 series



非集成式RJ45系列
Non-Integral RJ45 series



沉板式RJ45系列
RJ45 SMT Series



RJ11&RJ12系列
RJ11 & RJ12 Series

致力于成为世界一流的通信电子
“元器件供应商”、“方案解决商”、“互联网电商”

Committed to becoming a world-class communications electronics
"Component supplier", "solution provider", "high-quality Internet e-commerce"

苏州沃虎电子科技有限公司
Suzhou VOOHU Electronic Technology Co., Ltd.

VOOHU 沃虎

—— 连接世界 · 通信未来 ——

苏州沃虎电子科技有限公司
Suzhou VOOHU Electronic Technology Co., Ltd.

400 1048 018

www.wohu-tek.com

wohu@wohu-tek.com

江苏省苏州市吴江区苏州湾阿尔法大厦A-5F
5F, Building A, Suzhou Bay Alpha Building, Wujiang District,
Suzhou City, Jiangsu Province



公司官网



阿里巴巴

公司简介

Company Profile

沃虎电子创立于2018年，注册资金1000万元，是全球领先的通信电子元器件供应商。

我们会在自己专长的领域持续深耕细作，以优质、高效和信守承诺的服务保质保量按期满足客户需求。

Founded in 2018 with a registered capital of 10 million yuan, VOOHU Electronics is the world's leading supplier of communication electronic components. We will continue to work hard in our areas of expertise and meet customer needs on schedule with high quality, efficient technology and committed services.

沃虎 (VOOHU) 采用互联网模式为用户提供产品和方案的数字化选型设计定制，提供给客户最优的设计方案，坚持为客户创造价值，通过自主互联网平台提升效率，将可靠稳定的产品提供给全球用户。

VOOHU uses the Internet model to provide users with digital selection, design and customization of products and solutions, provides customers with the best design solutions, insists on creating value for customers, improves efficiency through its own Internet platform, and provides reliable and stable products to Global users.

目录

Company Profile

01

线路图

Circuit diagram (Transformer code)

02

RJ45 1×N DIP 内置 10/100/1000M Base-T 变压器系列

RJ45 1XN DIP with 10/100/1000M Base-T transformer series

03

RJ45 2×N DIP 内置 10/100/1000M Base-T 变压器系列

RJ45 1XN DIP with 10/100/1000M Base-T transformer series

04

RJ45 内置 2.5G/5G/10GBase-T 变压器系列
RJ45 with 2.5G/5G/10G Base-T transformer series

05

RJ45 SMT/ 沉板系列
RJ45 SMT / Low-profile series

06

RJ11 RJ12 RJ45 不带变压器系列
RJ11 RJ12 RJ45 without transformer series

主要产品

内置集成变压器

- RJ45 1×N DIP 系列 Connector
- RJ45 2×N DIP 系列 Connector
- RJ45 with USB 系列 Connector
- RJ45 with HDMI 系列 Connector
- RJ45 1×N DIP 系列 Connector
- RJ45 2×N DIP 系列 Connector
- RJ45 SMT 系列 Connector

不带集成变压器

- RJ11 系列 Connector
- RJ12 系列 Connector
- RJ56 系列 Connector
- RJ59 系列 Connector
- RJ45 SMT / 沉板系列

产品应用领域



网络传输

路由器、交换机、计算机、广告机、电视机、机顶盒 ...



信号通讯

打印机、POST 机、监控摄像、防盗 / 报警系统、感应系统 ...



智能互联

国家电网、电表、空调、洗衣机、抽油烟机、窗帘等智能家居 ...



其他领域

工业自动化领域，军工领域、其它领域 ...

主要产品目录

10/100/1000M 线路图

产品编码说明

001 RJ45 1×N DIP 内置 10/100/1000M Base-T 变压器系列

001 RJ45 1×1 21.3mm TAB-DOWN

012 RJ45 1×1 21.3mm TAB-UP

016 RJ45 1×1 25.4mm TAB-UP

018 RJ45 1×1 33mm TAB-UP

021 RJ45 1×1 180°直插型

025 RJ45 1×1 TAB-DOWN UP

029 RJ45 1×2 21.3mm TAB-DOWN

034 RJ45 1×4 21.3mm TAB-DOWN

038 RJ45+ 单双 USB

043 RJ45 2×N DIP 内置 10/100/1000M Base-T 变压器系列

043 RJ45 2×1

047 RJ45 2×2

050 RJ45 2×4

053 RJ45 2×6

054 RJ45 2×8

2.5G/5G/10G 线路图

055 RJ45 内置 2.5G/5G/10G Base-T 变压器系列

055 RJ45 2.5G

063 RJ45 5G

064 RJ45 10G

067 RJ45 SMT/ 沉板系列

067 RJ45 SMT 沉板带变压器系列

073 产品编码说明

073 RJ11 RJ12 RJ45 不带变压器系列

073 52 系列

085 53 系列

090 55 系列

097 56 系列

115 57 系列

117 59 系列













131 60S 系列

133 RJ45+ 单双 USB













135 RJ45 SMT/ 沉板系列

135 RJ45 SMT / 沉板不带变压器系列













线路图 B001-B021

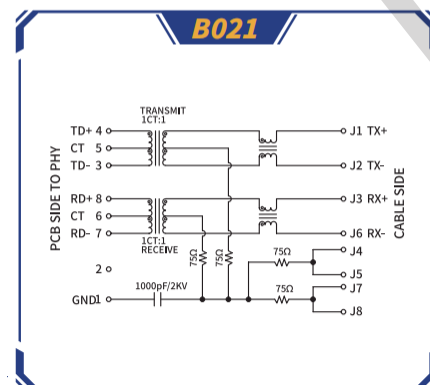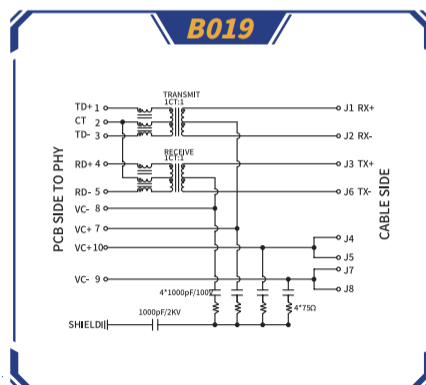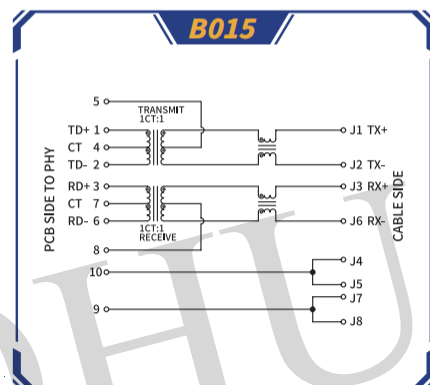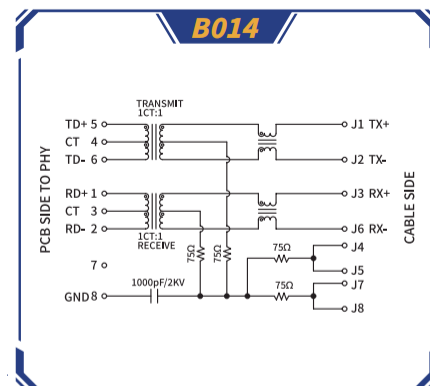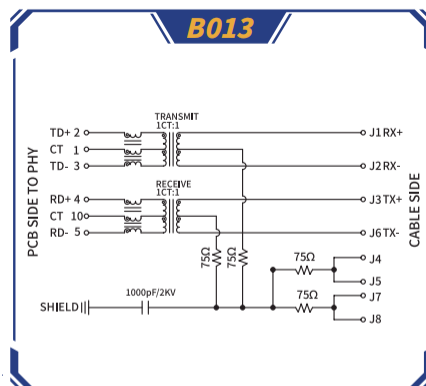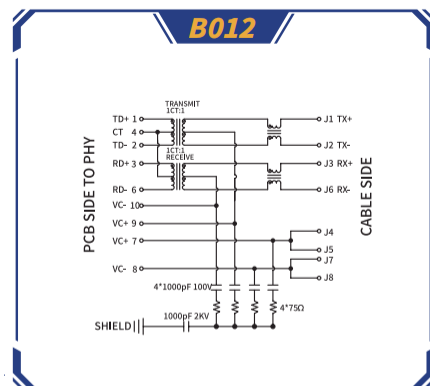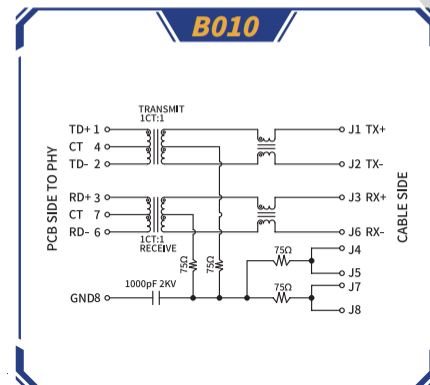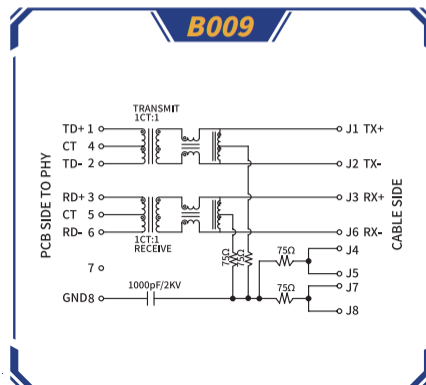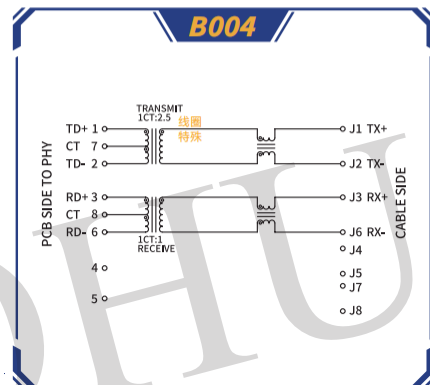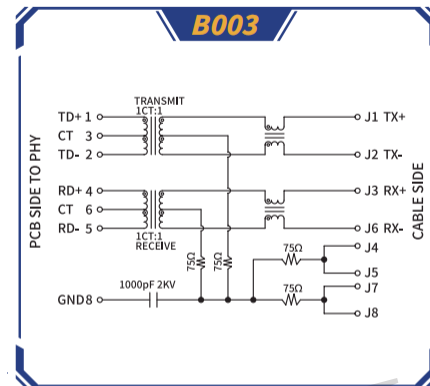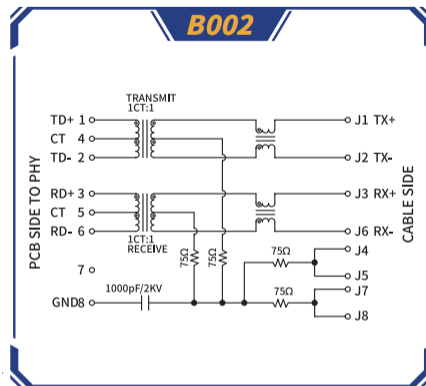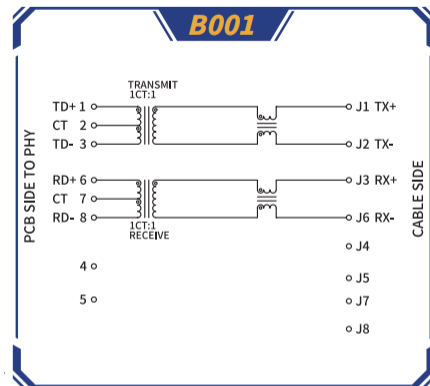













线路图 B024-B073

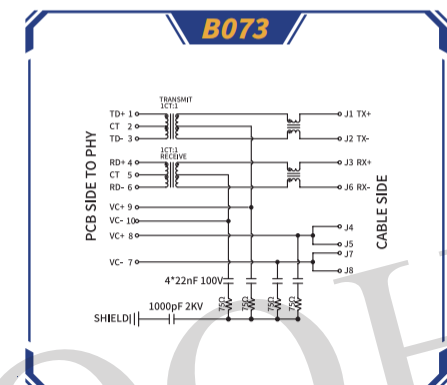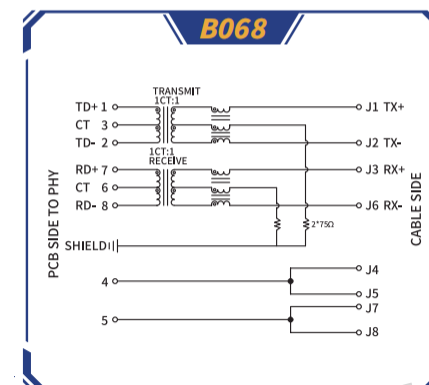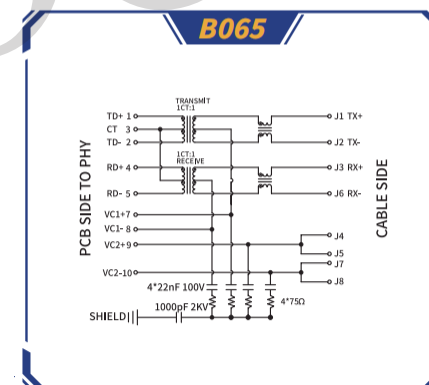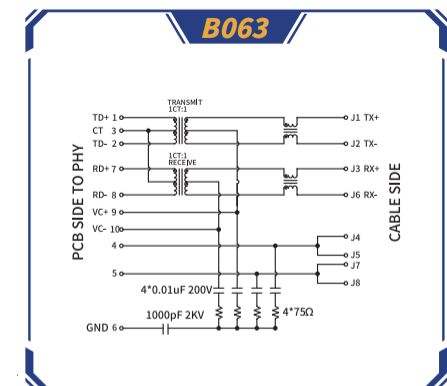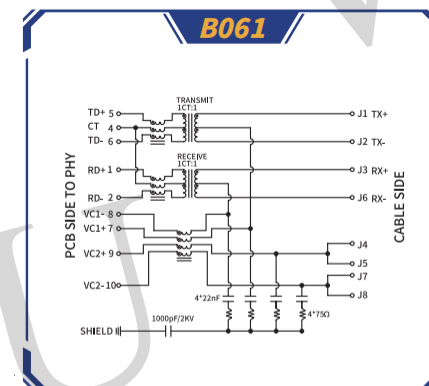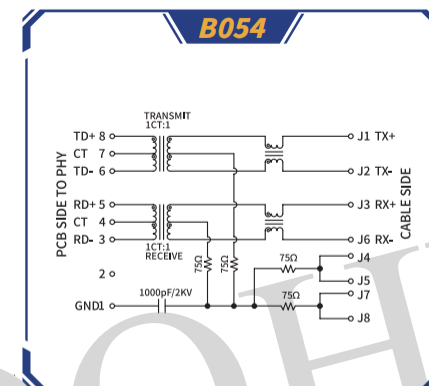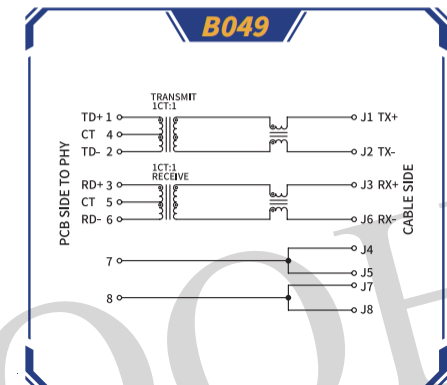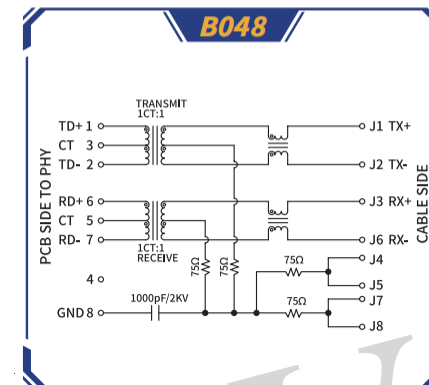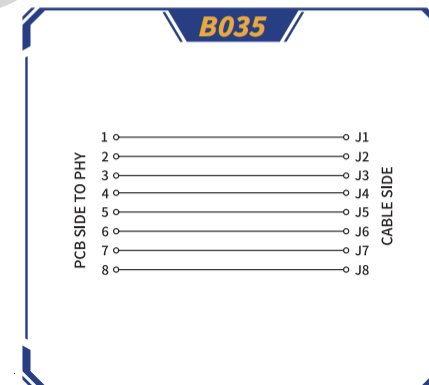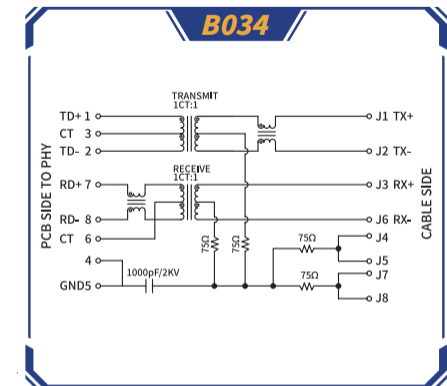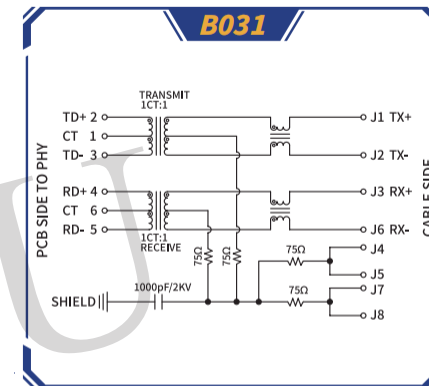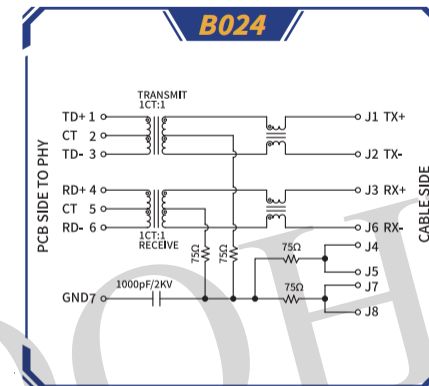













线路图 B079-B094

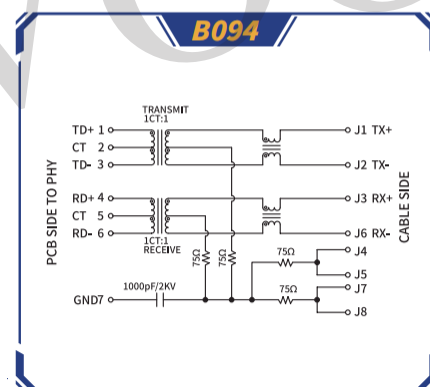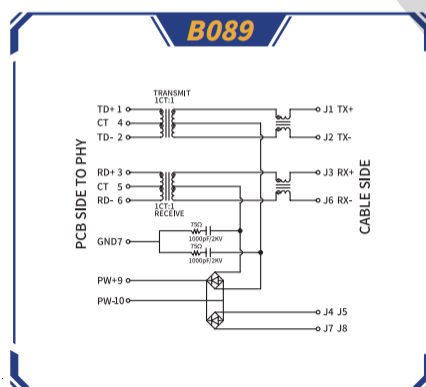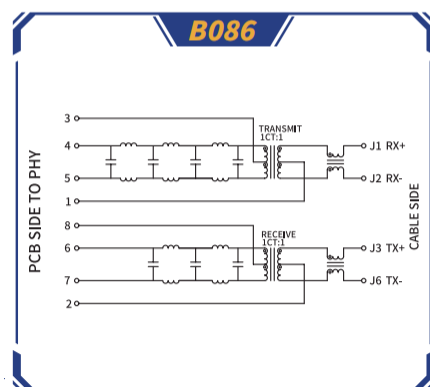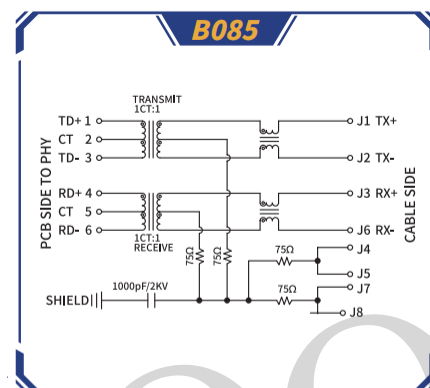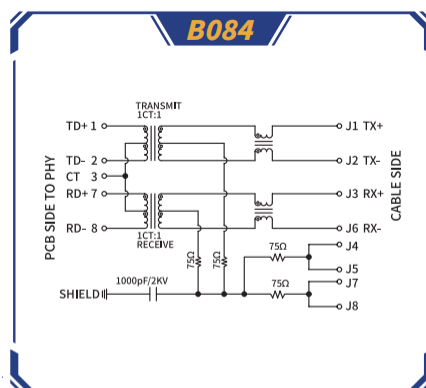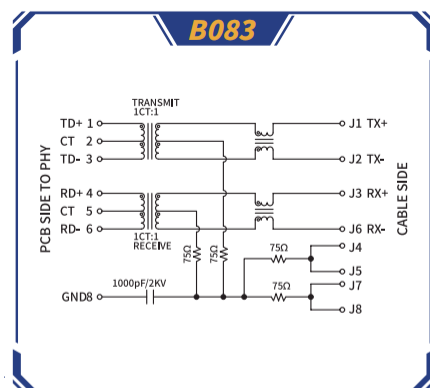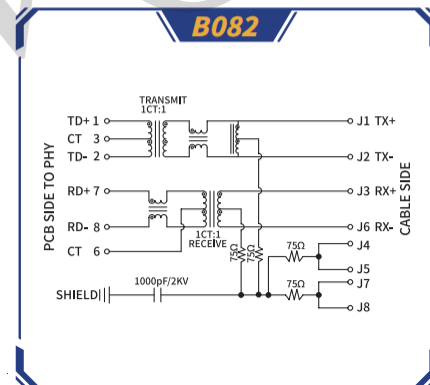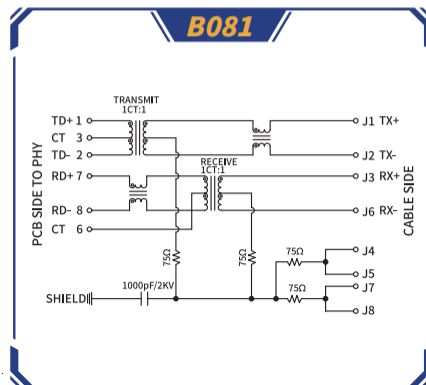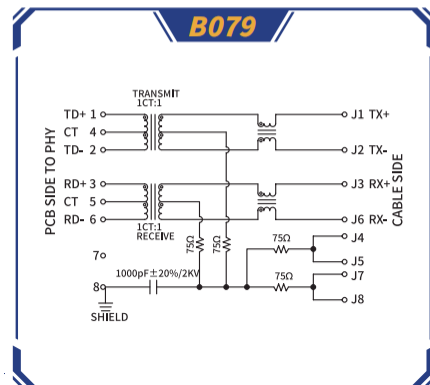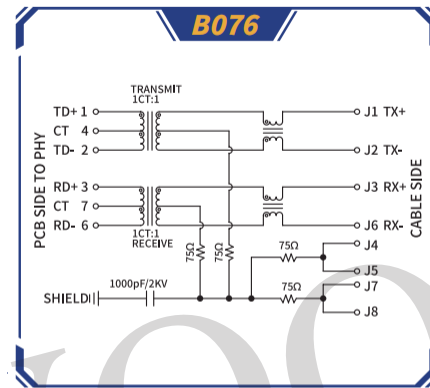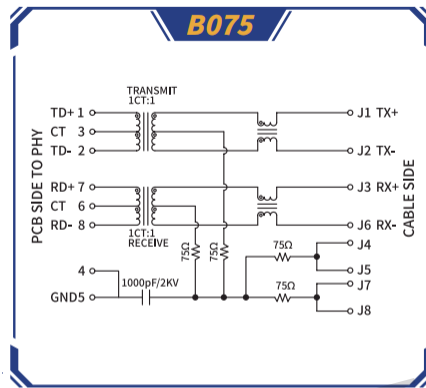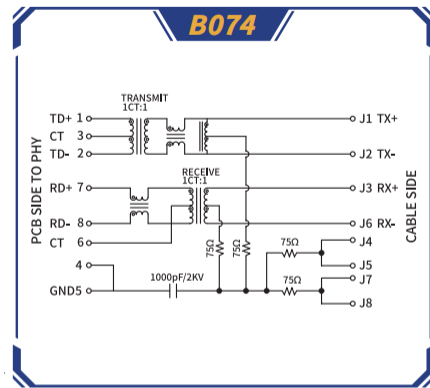













线路图 B096-B158

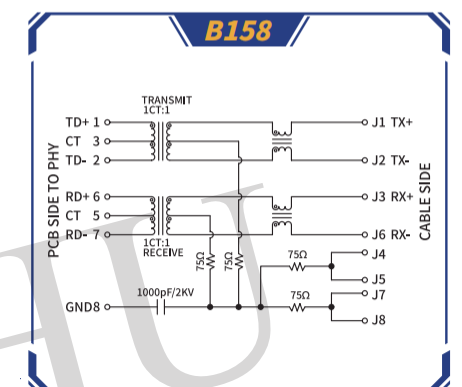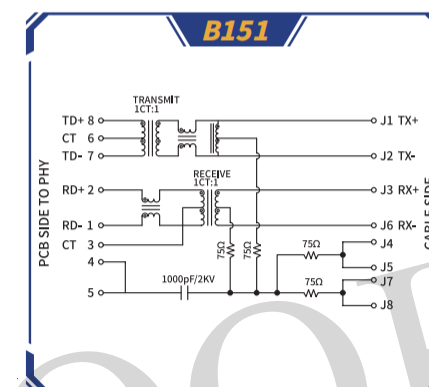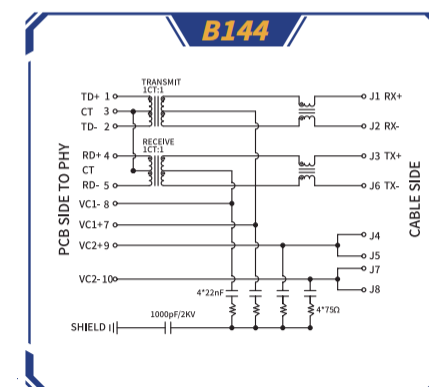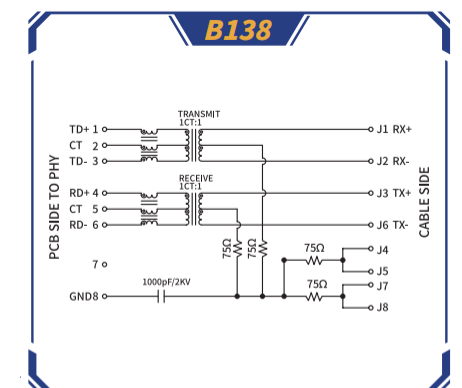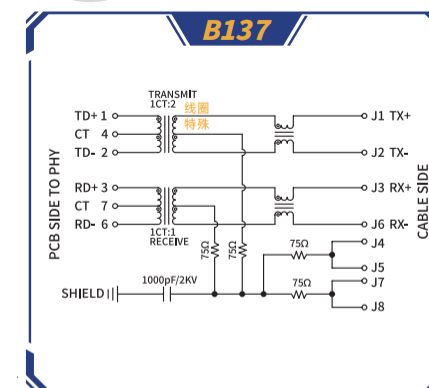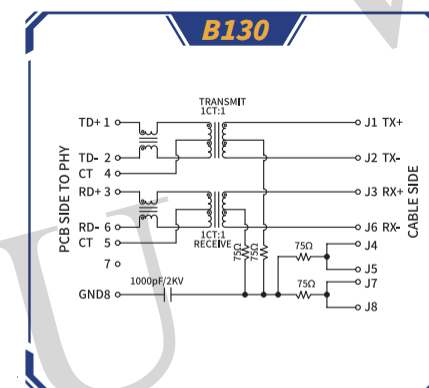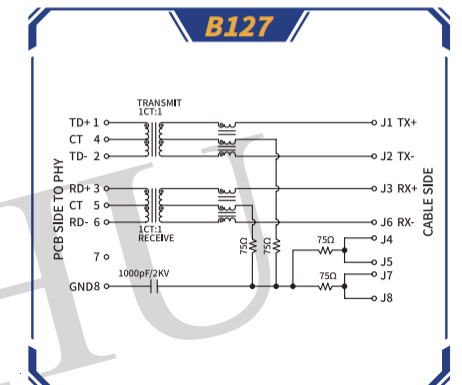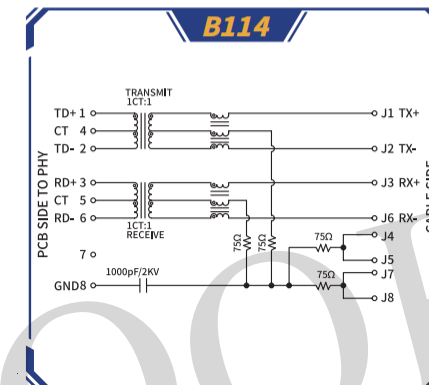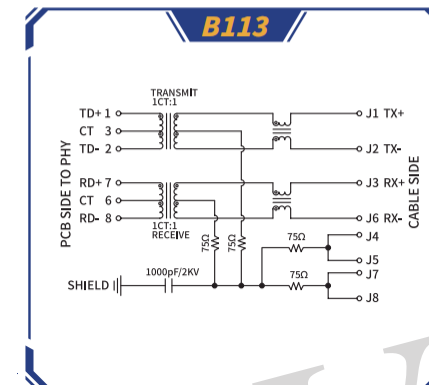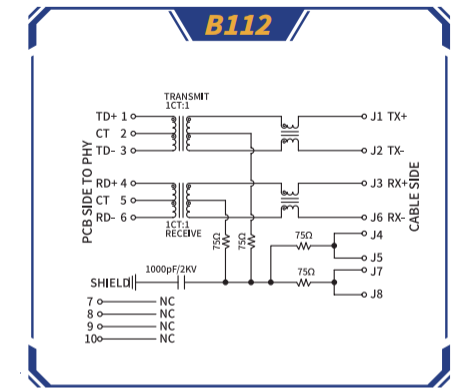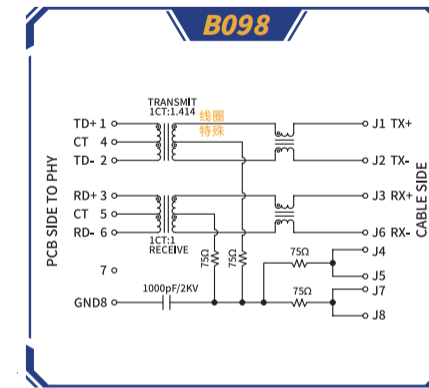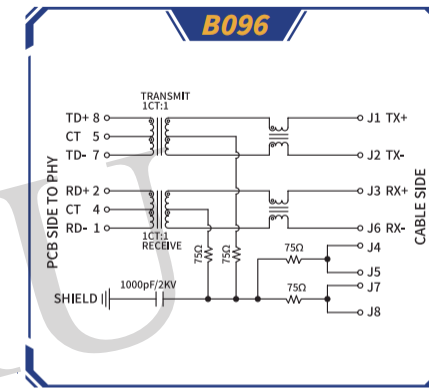

线路图 B160-B313

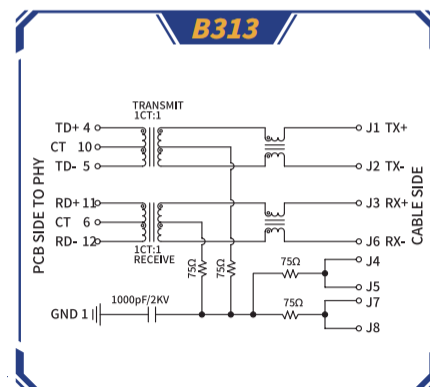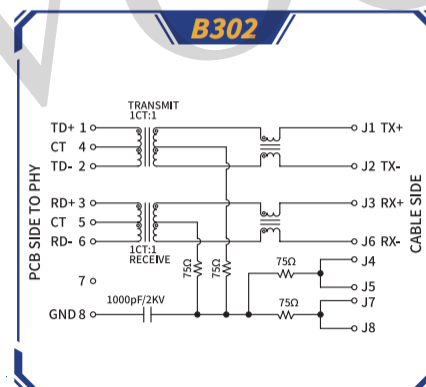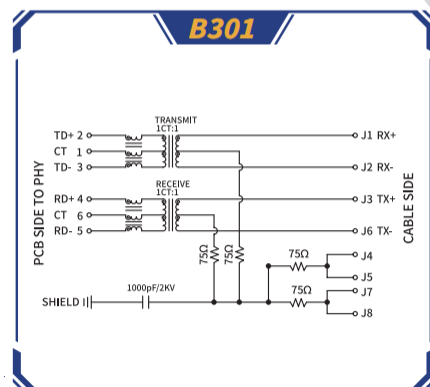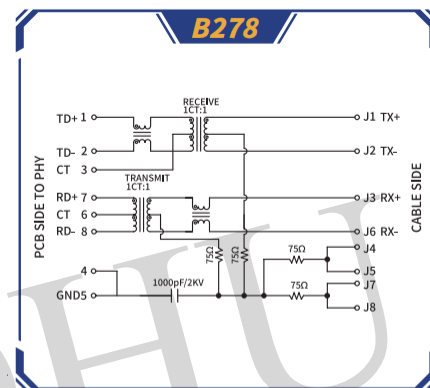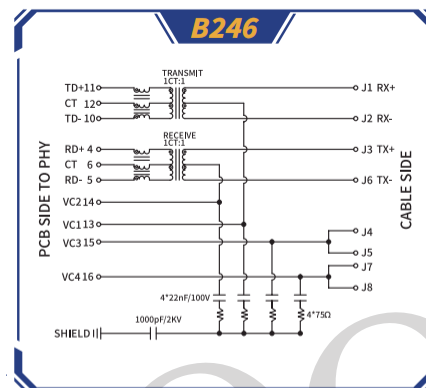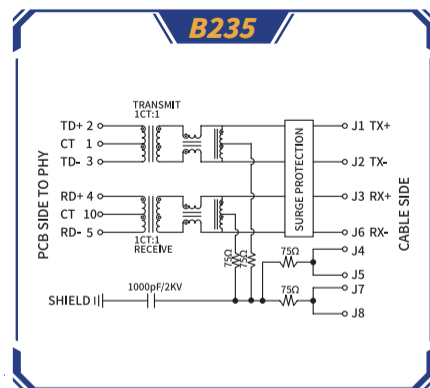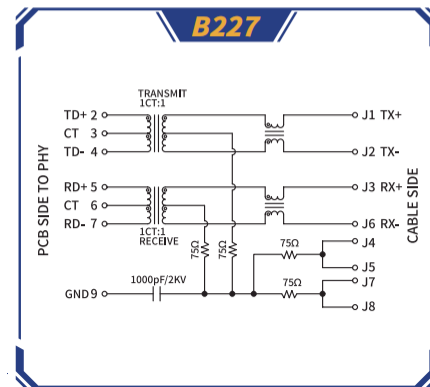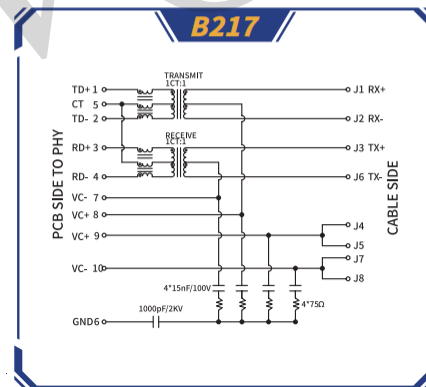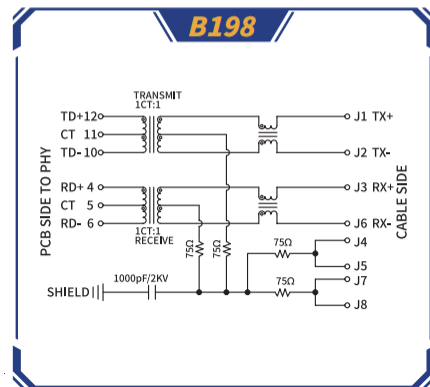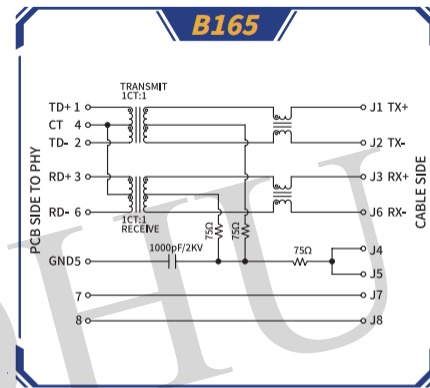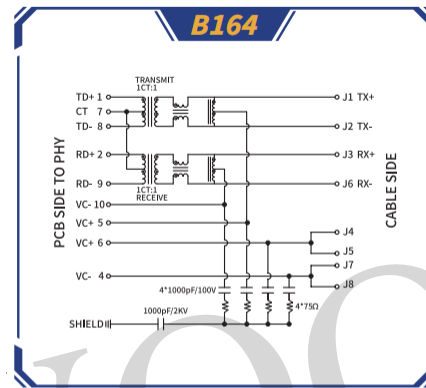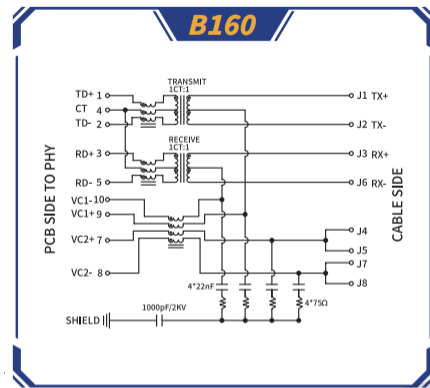

线路图 B324-392

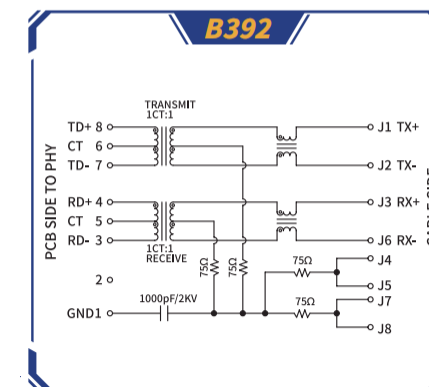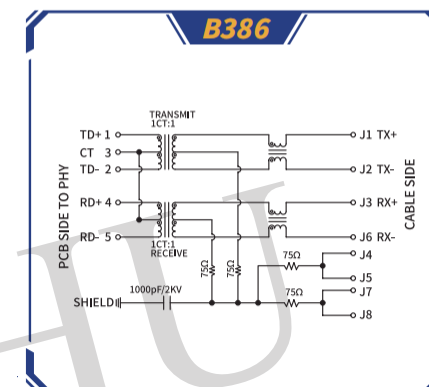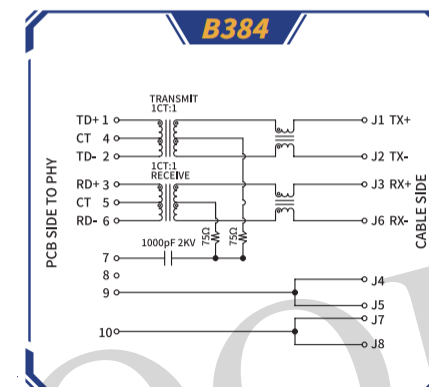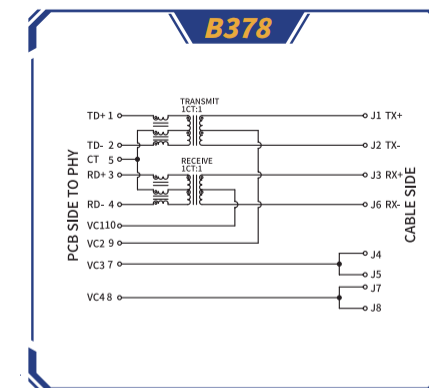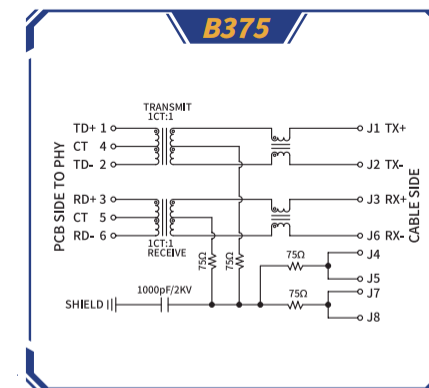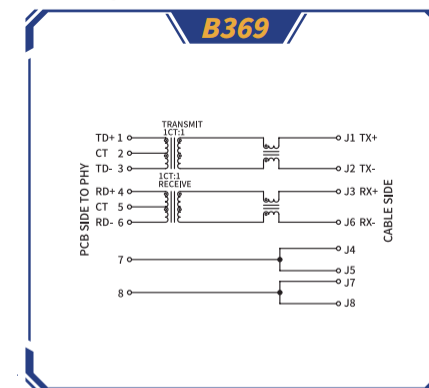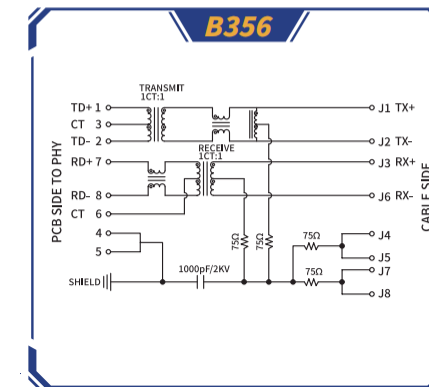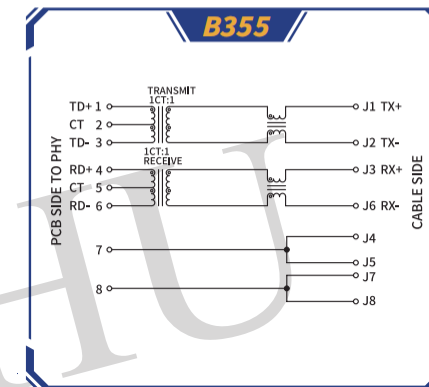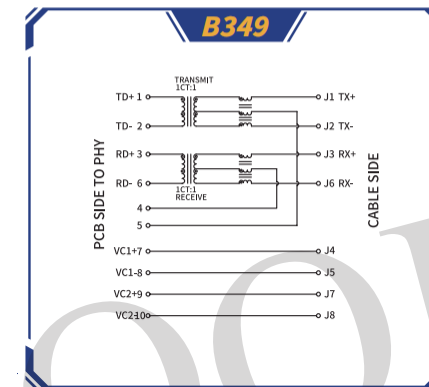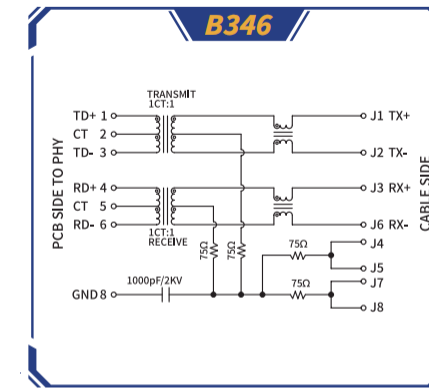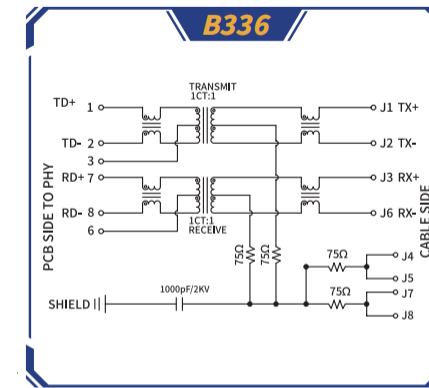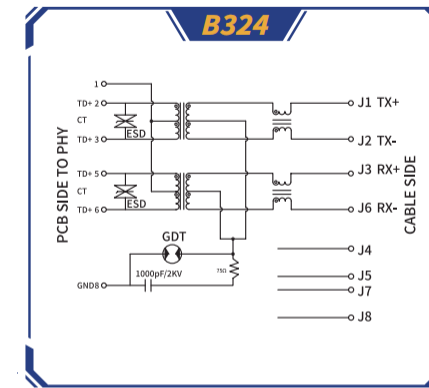



产品料号P/N:SYT111****IWA1DDJ (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V.

是否带灯With LED: NO


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional.

使用温度Operating temperature: 0~70°C or -40~85°C optional.

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

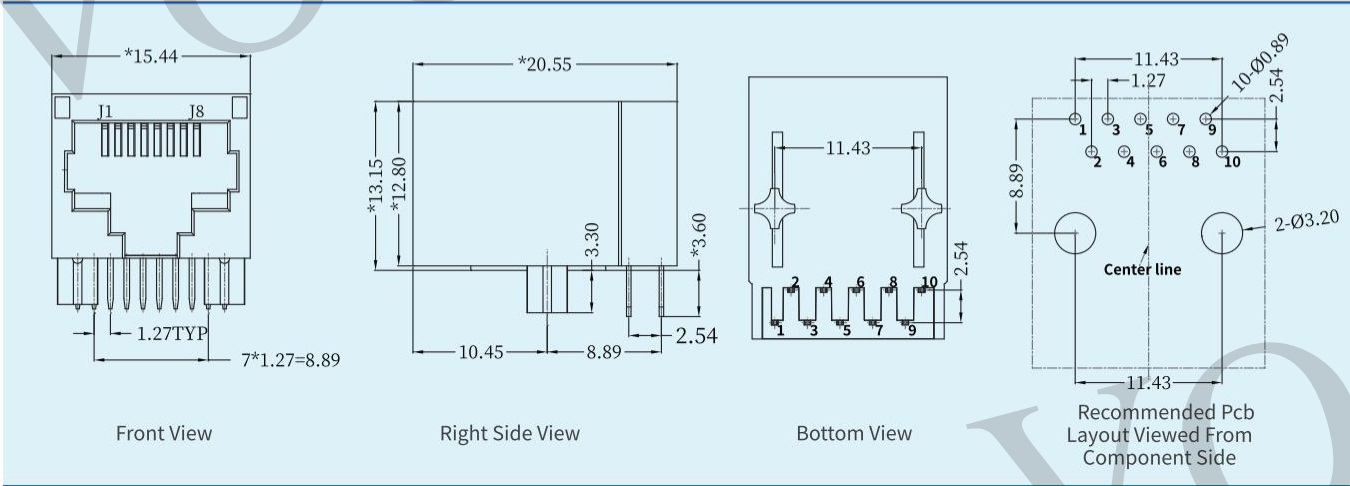

产品料号P/N:SYT111****IWA4DDJ (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V.

是否带灯With LED: NO


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional.

使用温度Operating temperature: 0~70°C or -40~85°C optional.

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

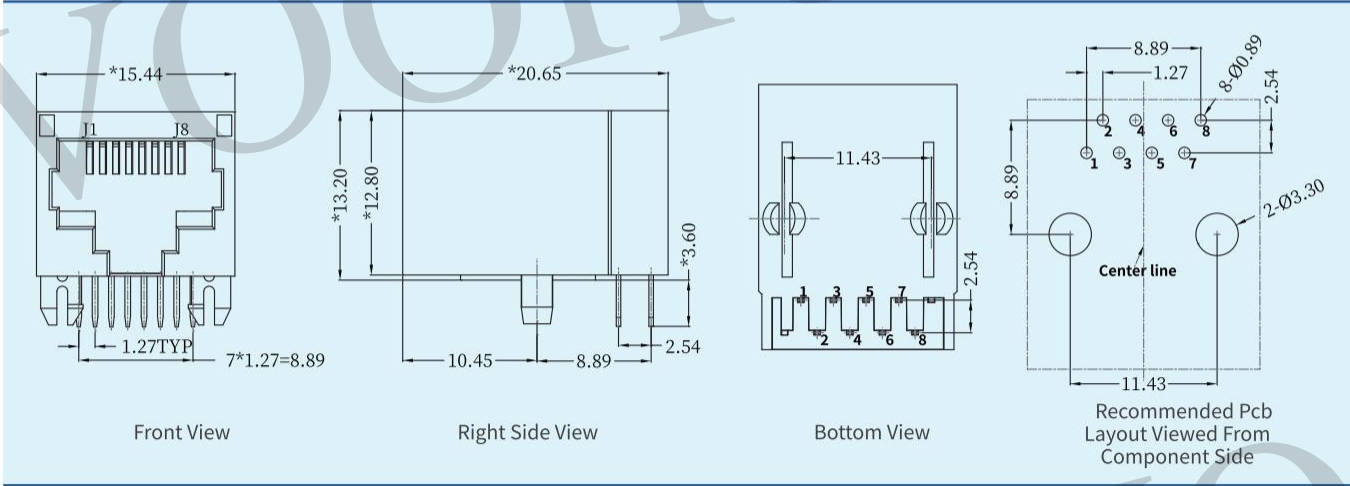

产品料号P/N:SYT111****JA2A1DDJ (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V.

是否带灯With LED: Yes, L-Green / R-Yellow



接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional.

使用温度Operating temperature: 0~70°C or -40~85°C optional.

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

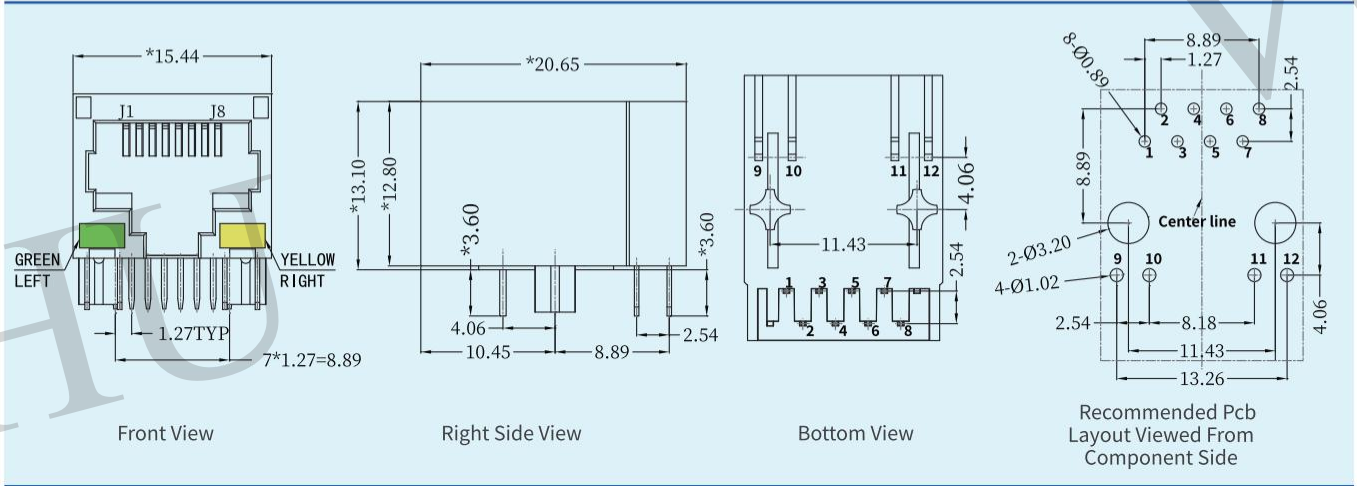

产品料号P/N:SYT111****JB2A15DBDJ (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V.

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional.

使用温度Operating temperature: 0~70°C or -40~85°C optional.

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

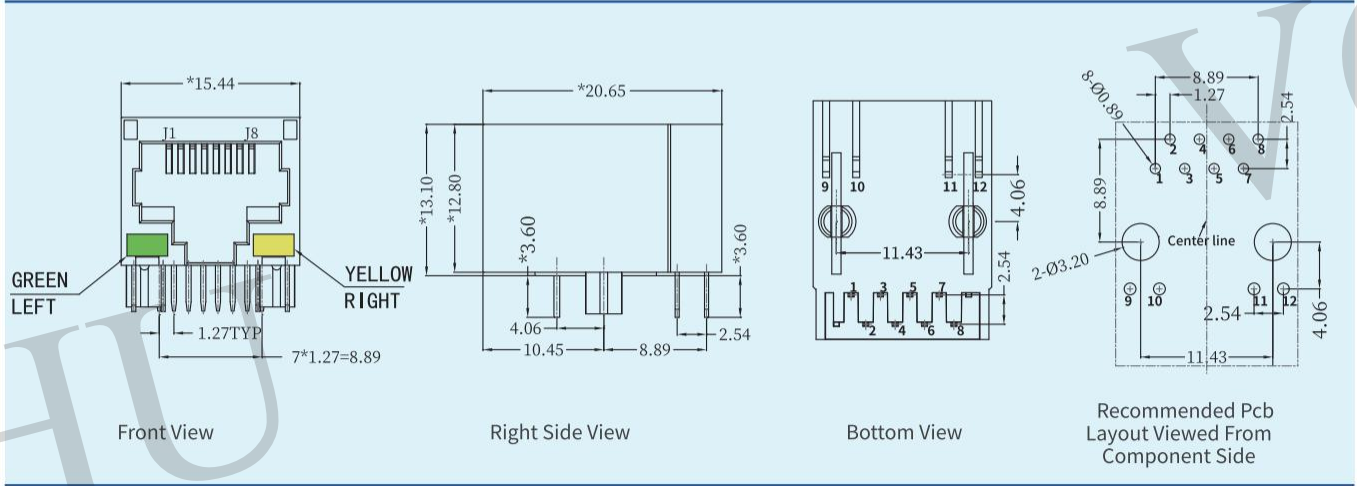




产品料号P/N:SYT111****LA2A1DDJ (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector
卡口方向Latch: Tab Down
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz, 0.1V.
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional.
使用温度Operating temperature: 0~70°C or ~40~85°C optional.
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图：

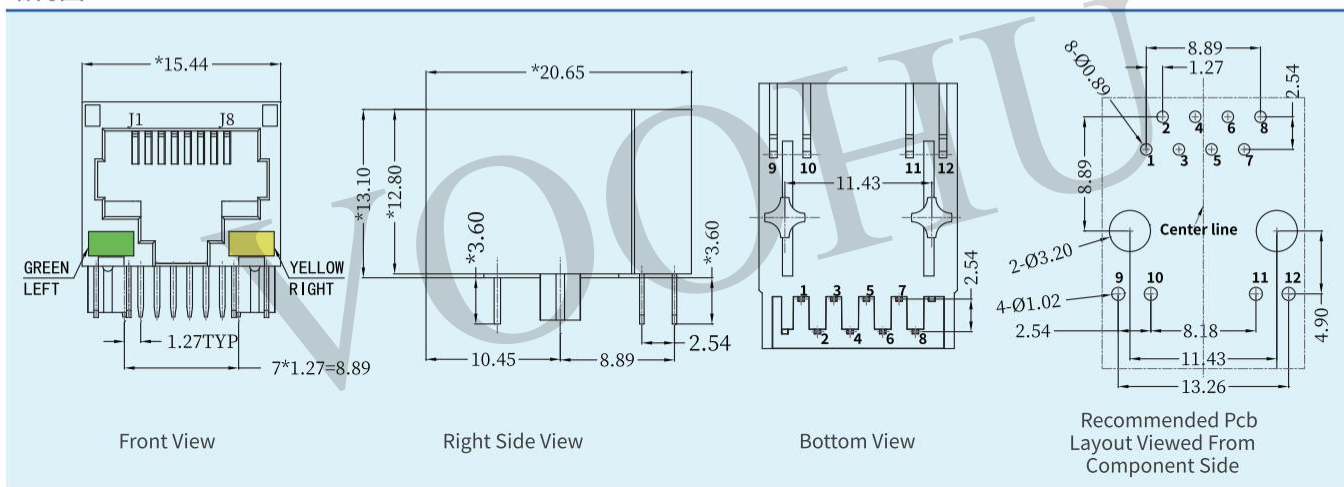


产品料号P/N:SYT111****KA2A1DDJ (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector
卡口方向Latch: Tab Down
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz, 0.1V.
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional.
使用温度Operating temperature: 0~70°C or -40~85°C optional.
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图：

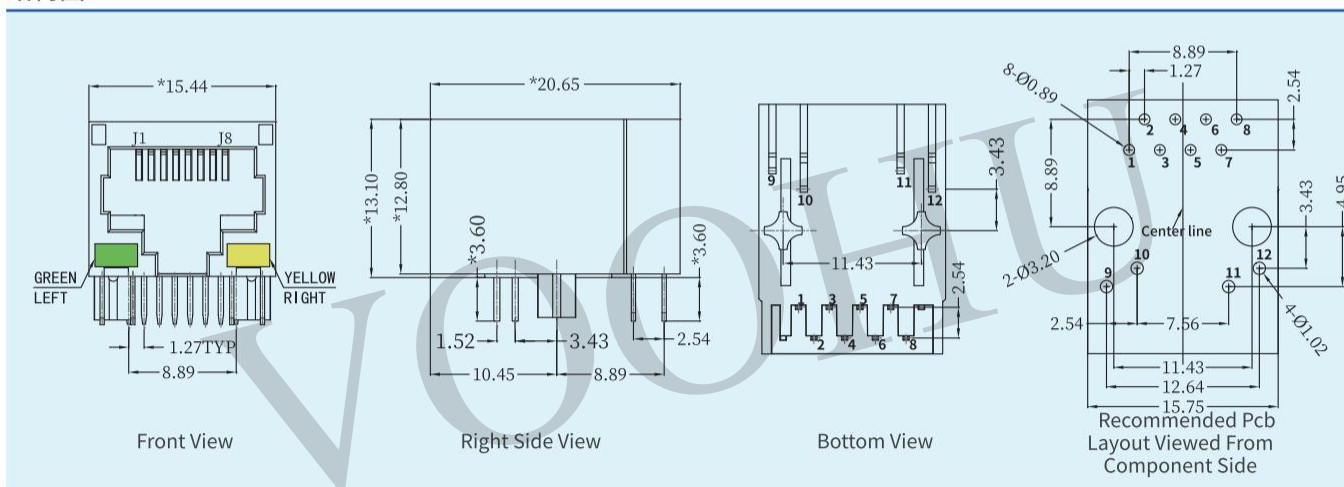


产品料号P/N:SYT111****KA2A4DDJ (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector
 卡口方向Latch: Tab Down
 适用传输速率Speed: 10/100/1000M Base-T
 线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1
 电感OCL: 350uH Minimum @100K Hz, 0.1V.
 是否带灯With LED: Yes, L-Green / R-Yellow
 接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional.
 使用温度Operating temperature: 0~70°C or -40~85°C optional.
 适用制程Application process: THT or THR optional
 标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图：

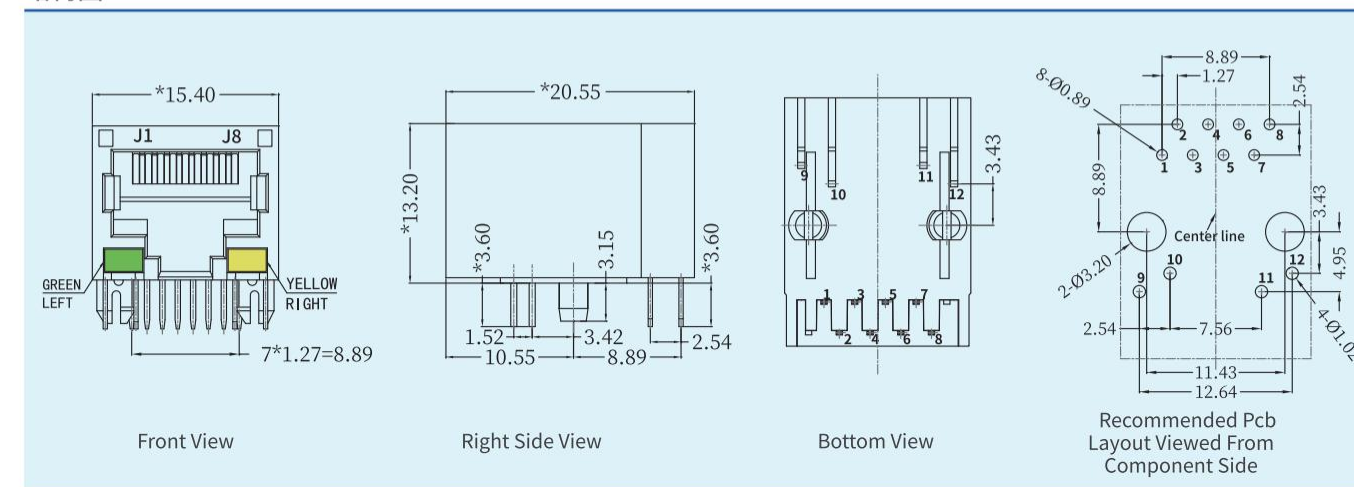


产品料号P/N:SYT111****GWA1D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector
卡口方向Latch: Tab Down
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz, 0.1V.
是否带灯With LED: No
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional.
使用温度Operating temperature: 0~70°C or -40~85°C optional.
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图：

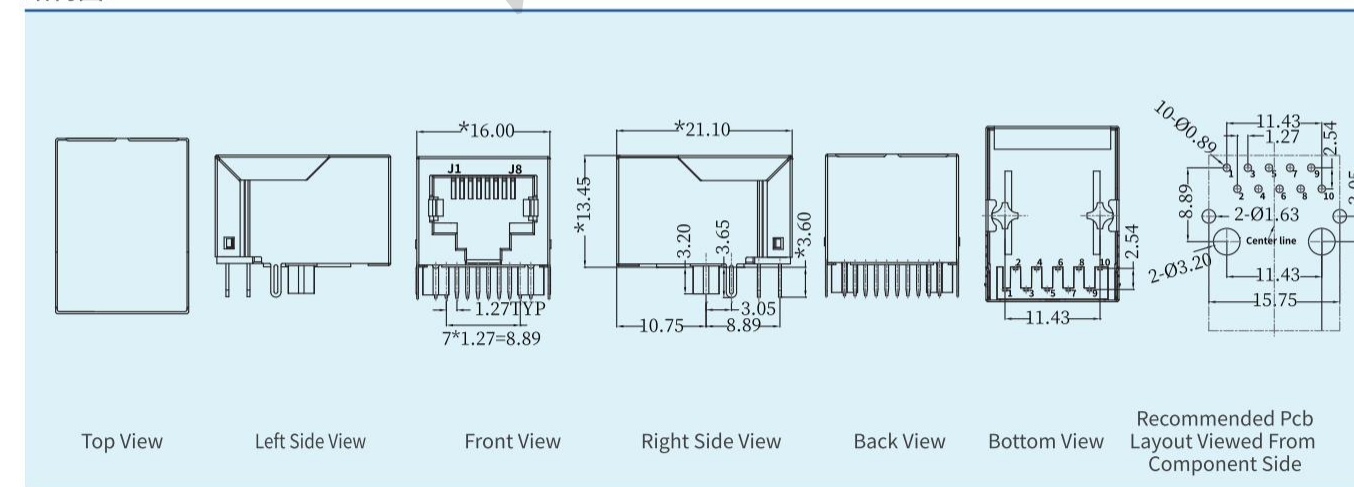



产品料号P/N:SYT111****GWA4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

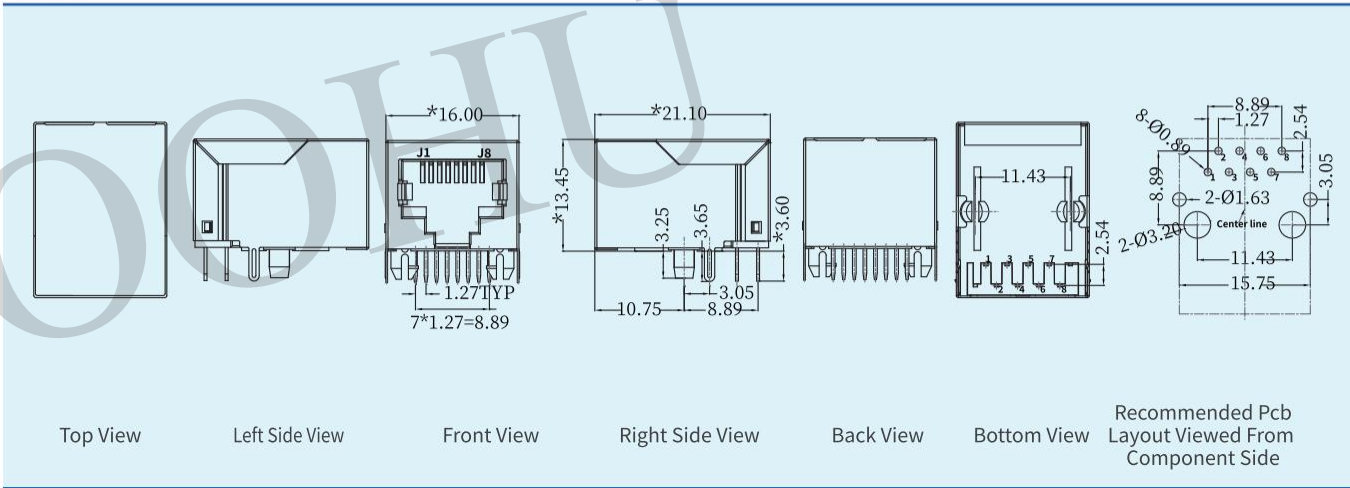

产品料号P/N:SYT111****HWA1D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No



接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

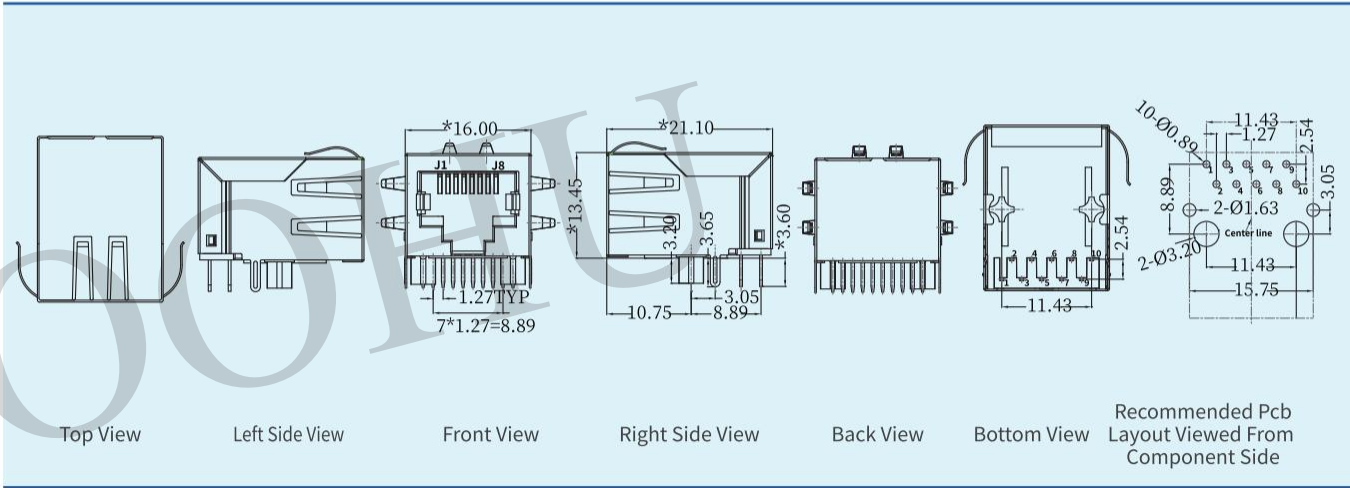

产品料号P/N:SYT111****HWA4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No



接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

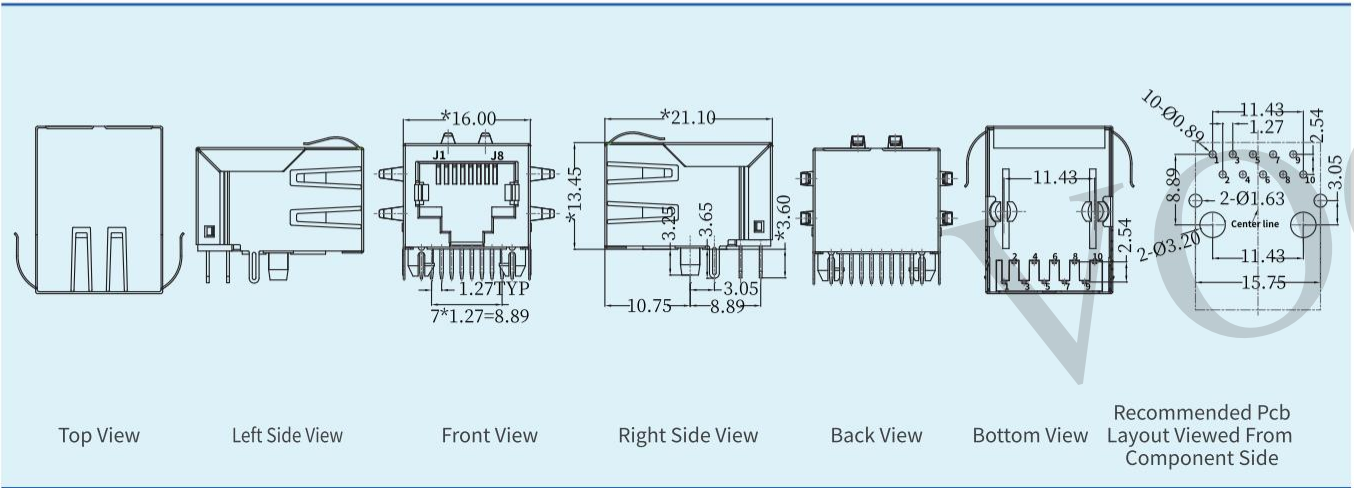

产品料号P/N:SYT111****AB2A1D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

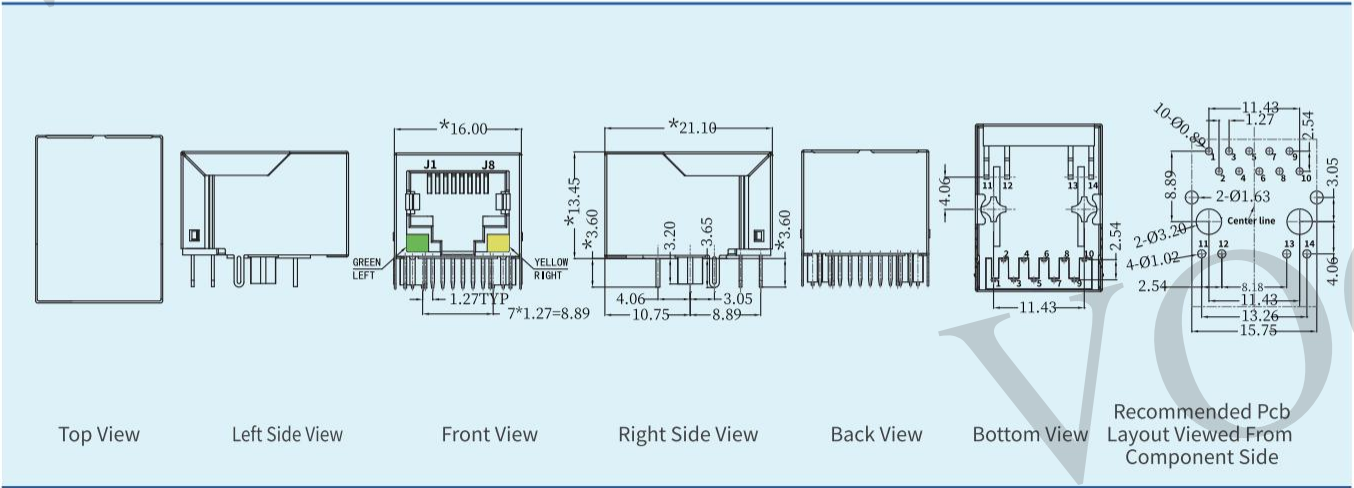



产品料号P/N:SYT111****AA2A4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

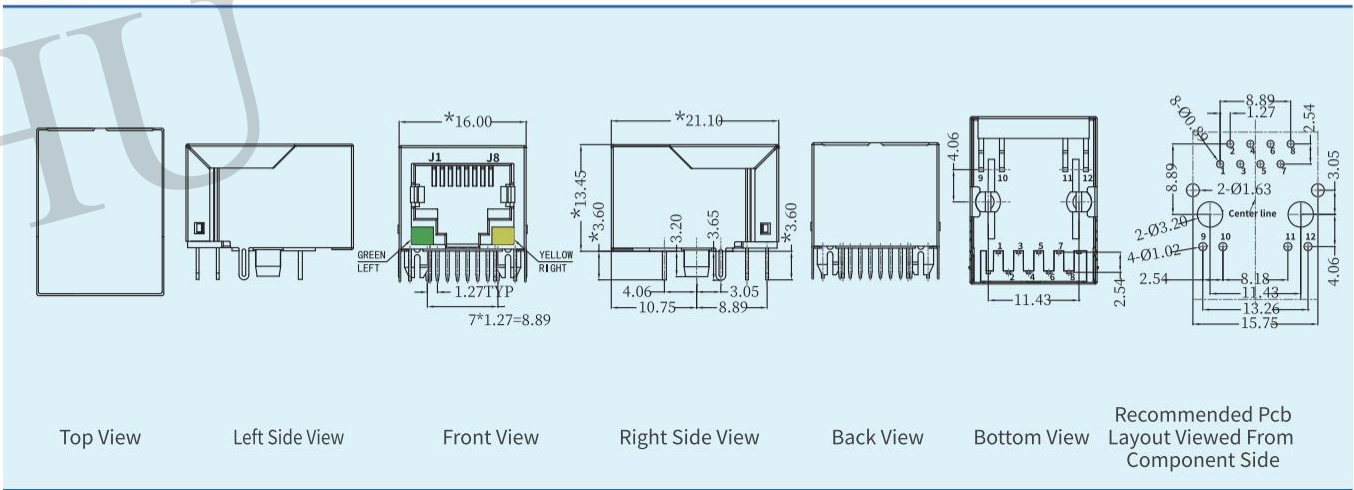

产品料号P/N:SYT111****BA2A1D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

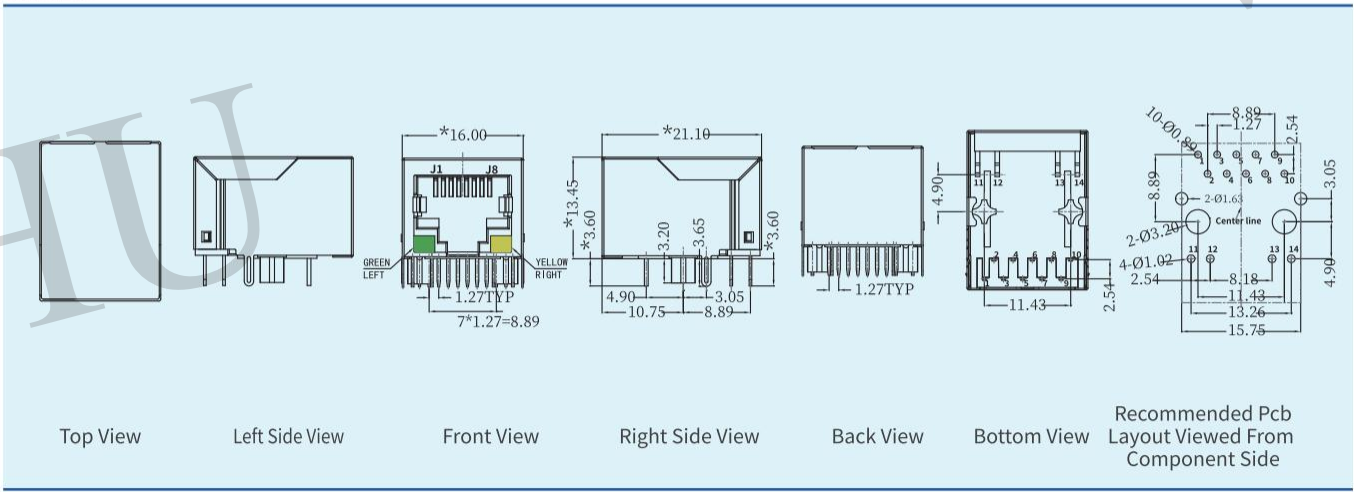

产品料号P/N:SYT111****BA2A4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

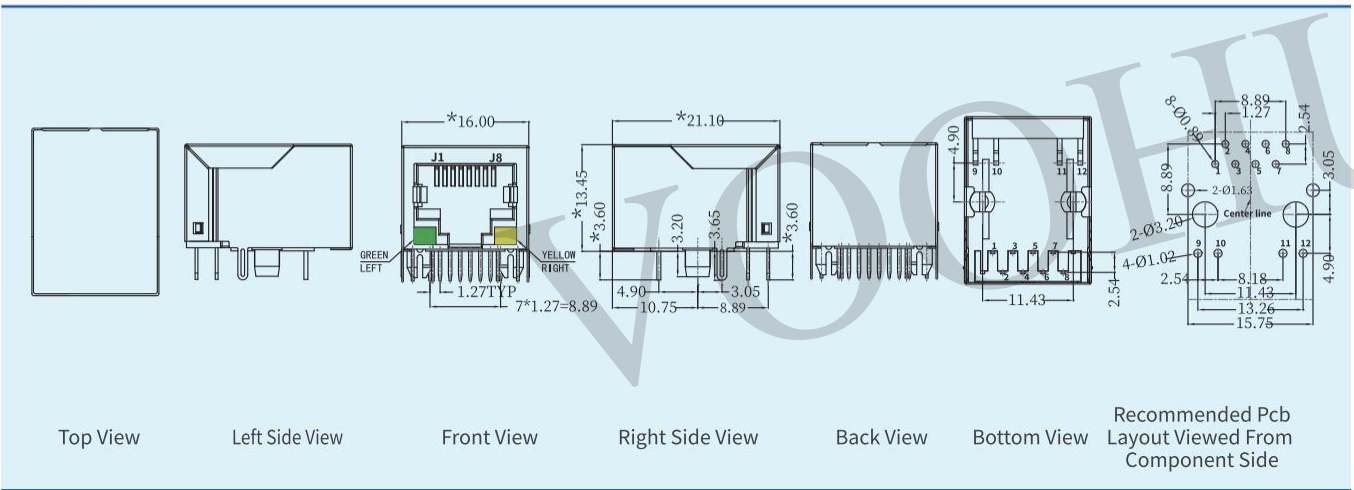

产品料号P/N:SYT111****CA2A1D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

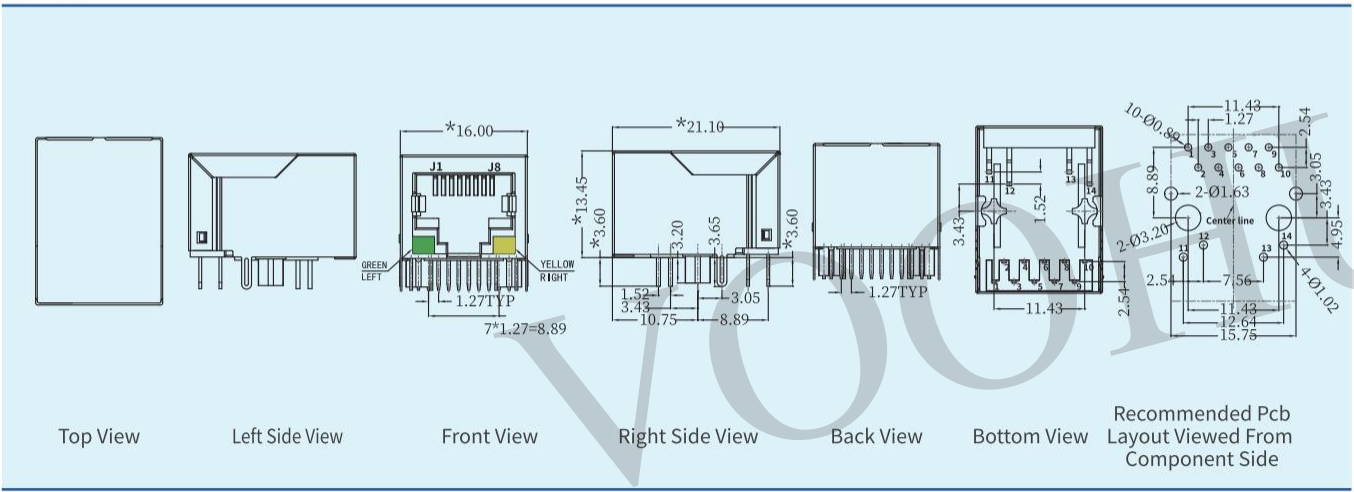



产品料号P/N:SYT111****CA2A4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

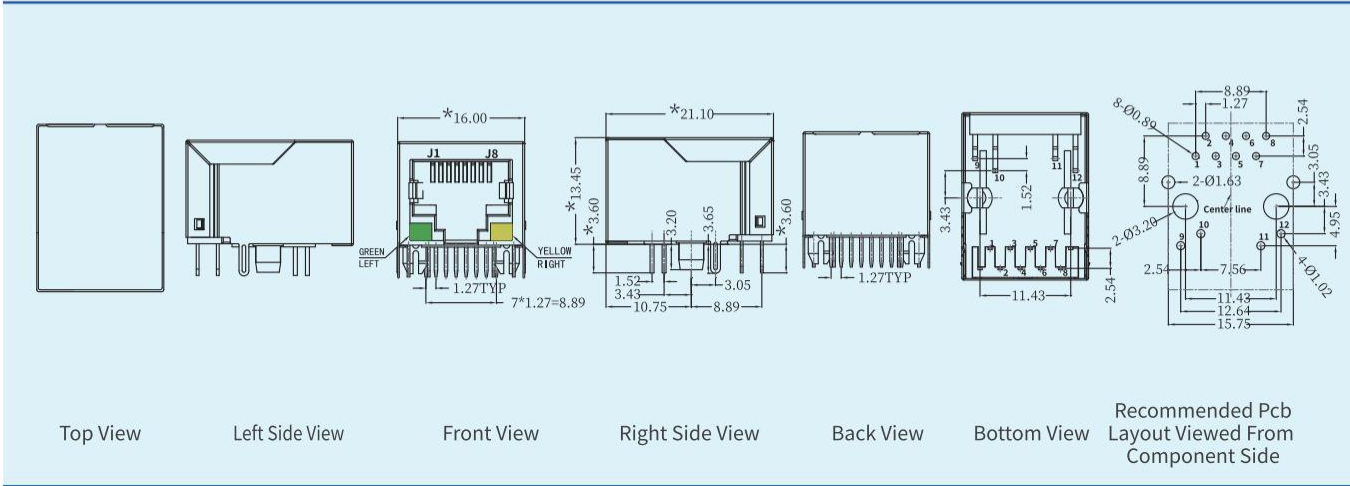

产品料号P/N:SYT111****DA2A1DHF (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

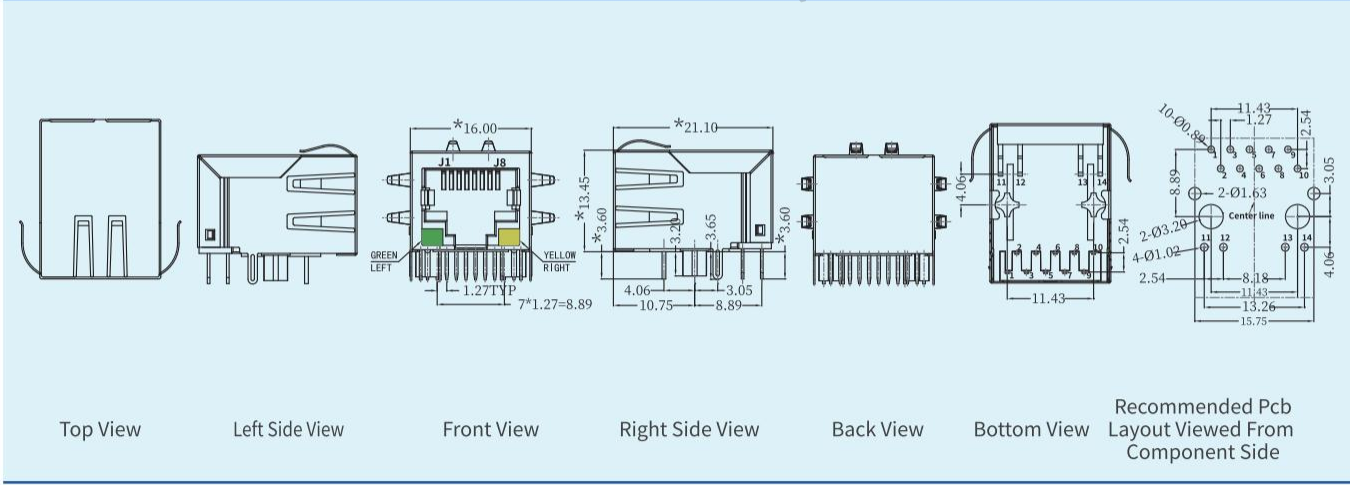

产品料号P/N:SYT111****DA2A4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

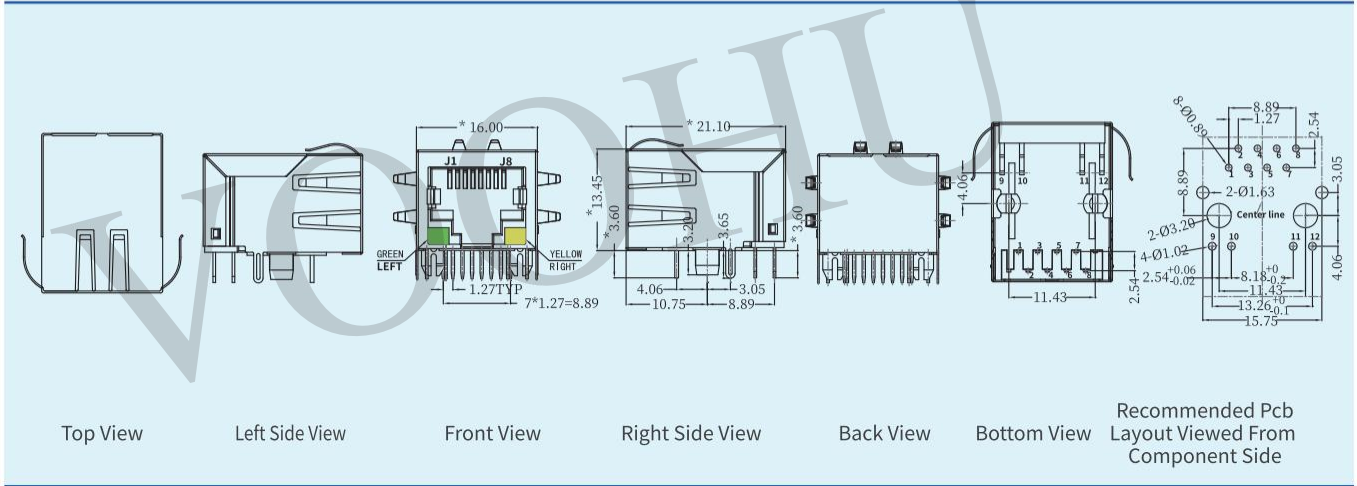

产品料号P/N:SYT111****EA2A1D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

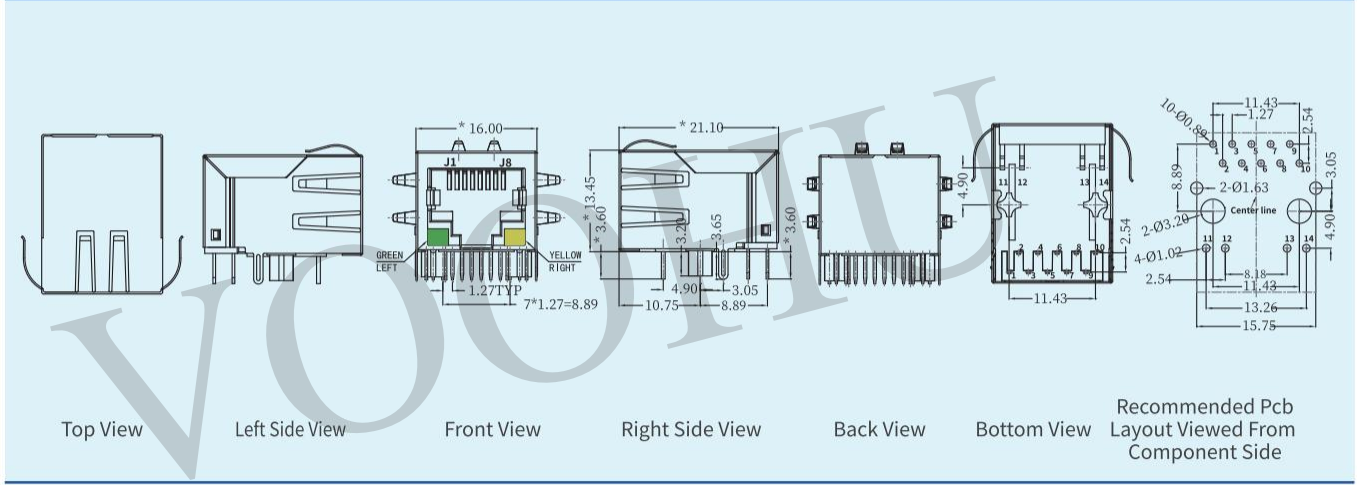



产品料号P/N:SYT111****FA2A1D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

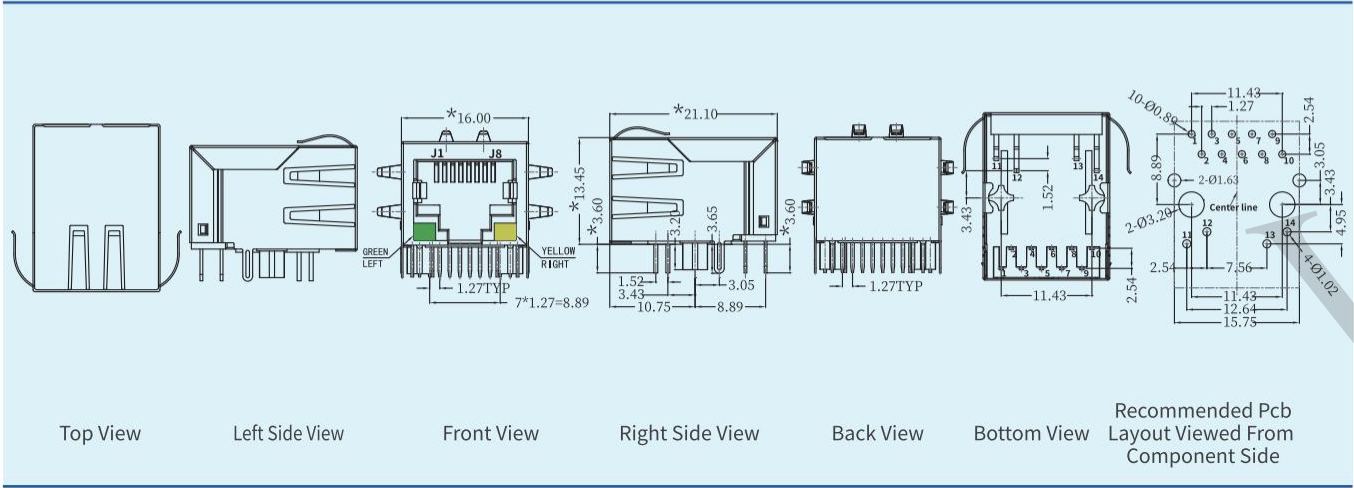

产品料号P/N:SYT111****FA2A4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

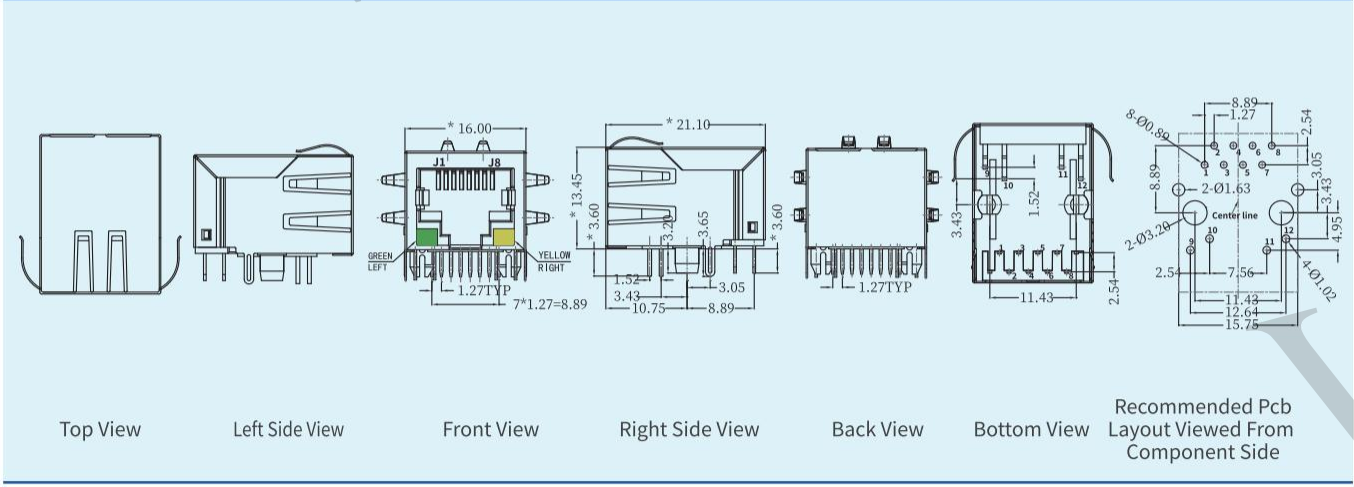

产品料号P/N:SYT211****IWA4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

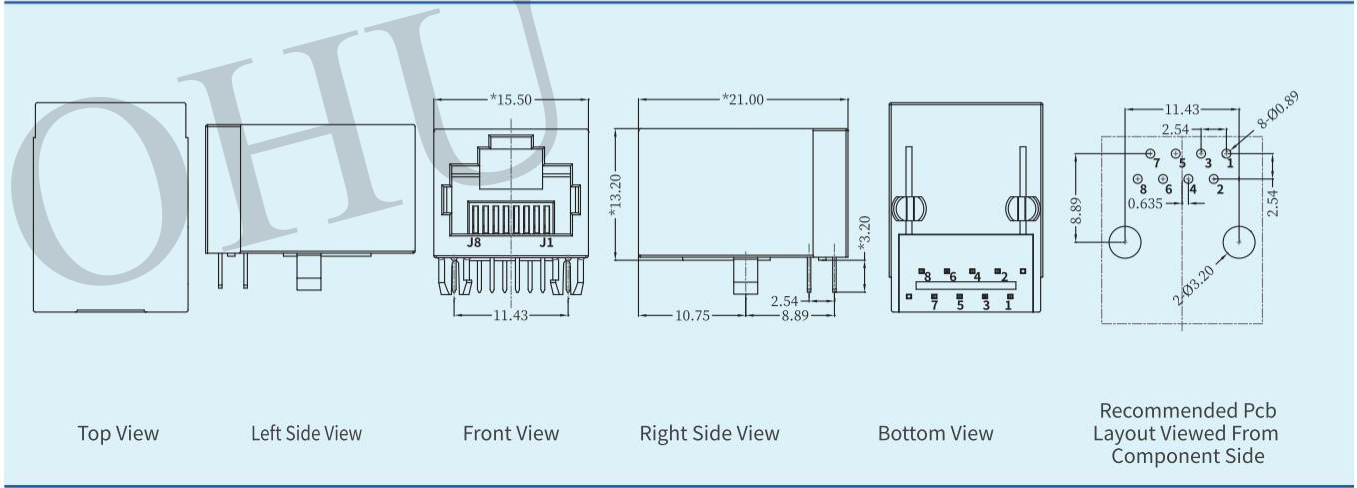

产品料号P/N:SYT111****KD2A4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

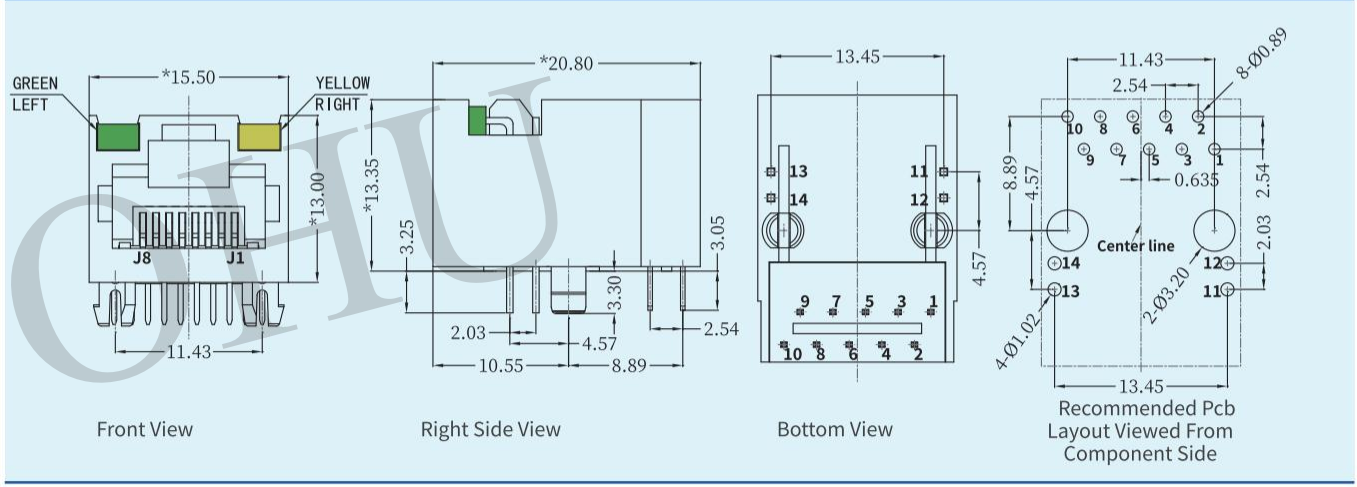



产品料号P/N:SYT211****GWA4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

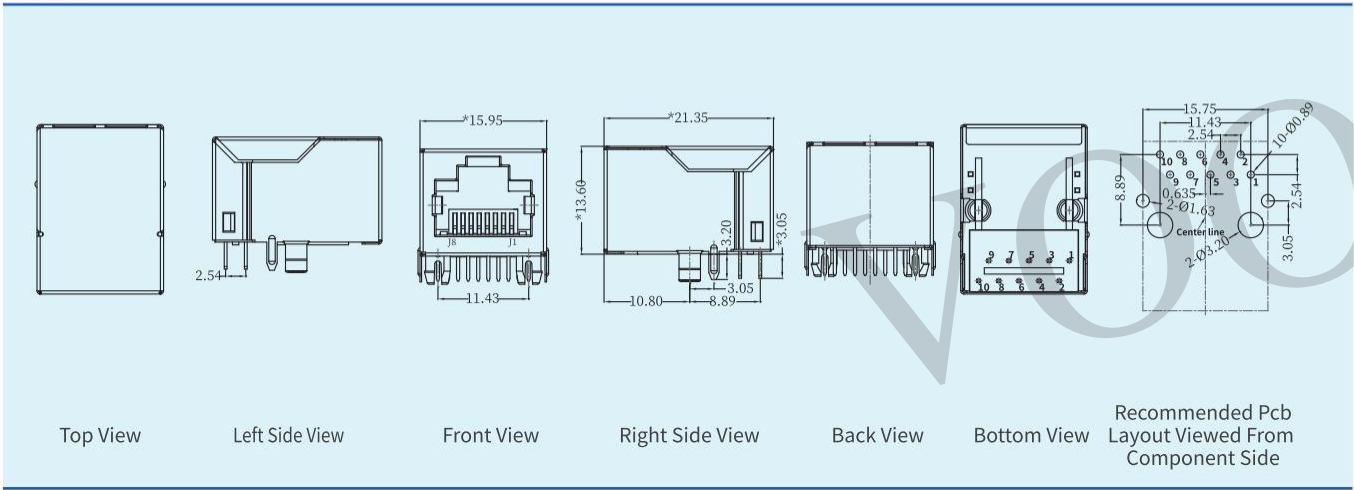

产品料号P/N:SYT211****HWA4DZ (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

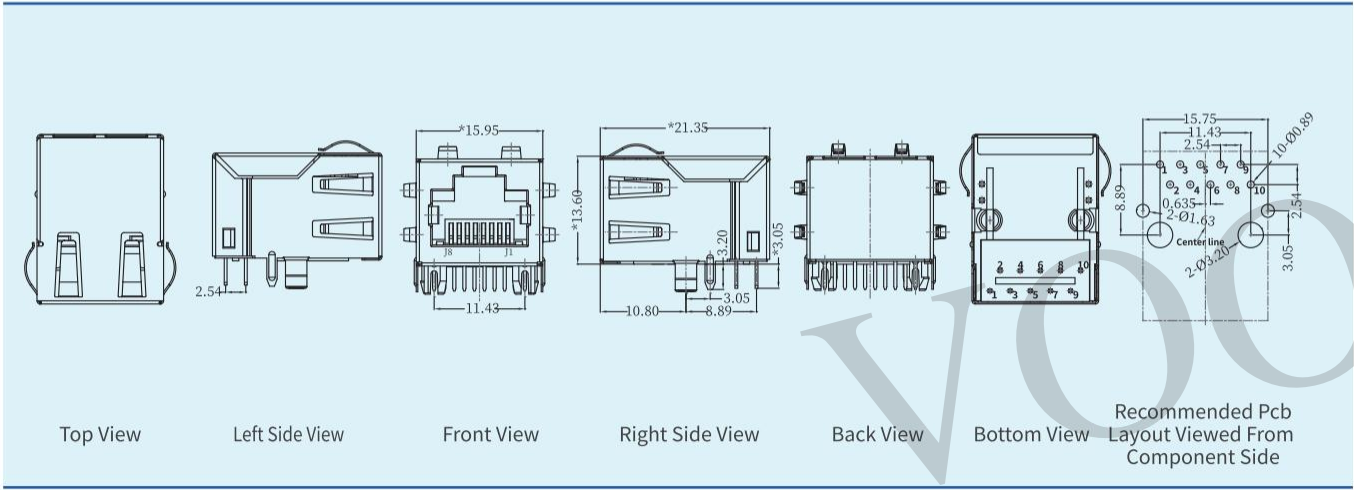

产品料号P/N:SYT211****CD2A4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

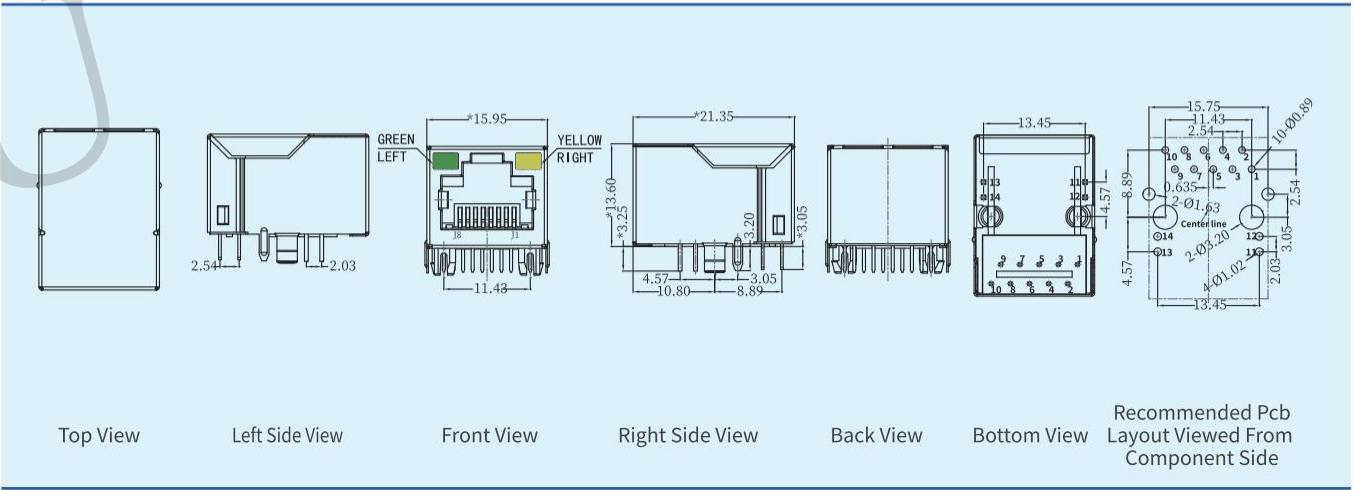

产品料号P/N:SYT211****FD1A4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Yellow / R-Green


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

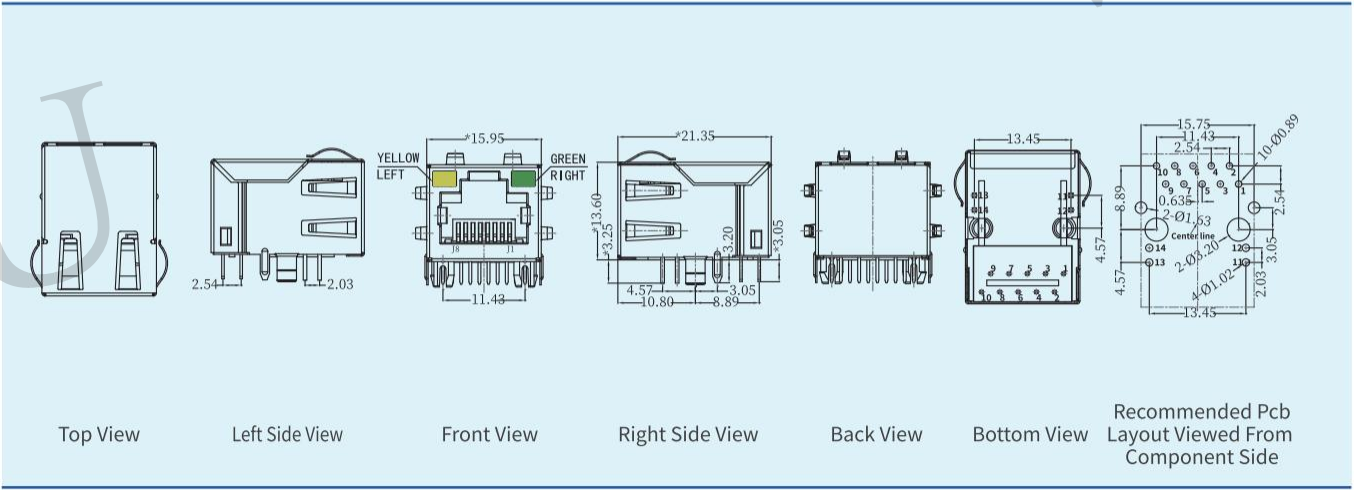



产品料号P/N:SYT311****IWA4DN (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

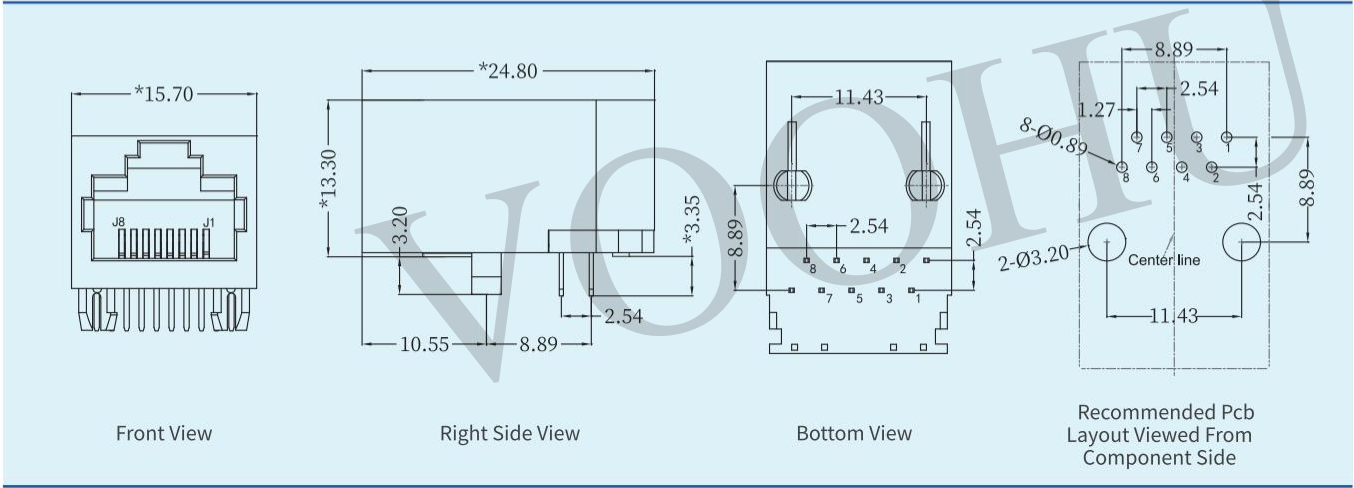

产品料号P/N:SYT311****JA4DN (****: see transformer code)

产品规格 Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

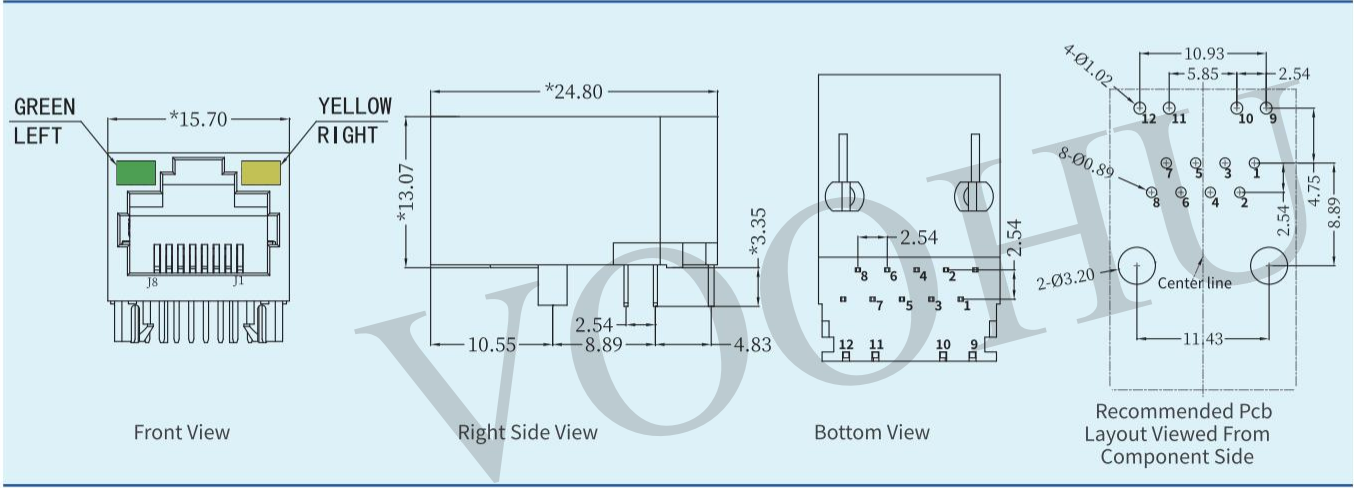

产品料号P/N:SYT311****GWA4DN (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

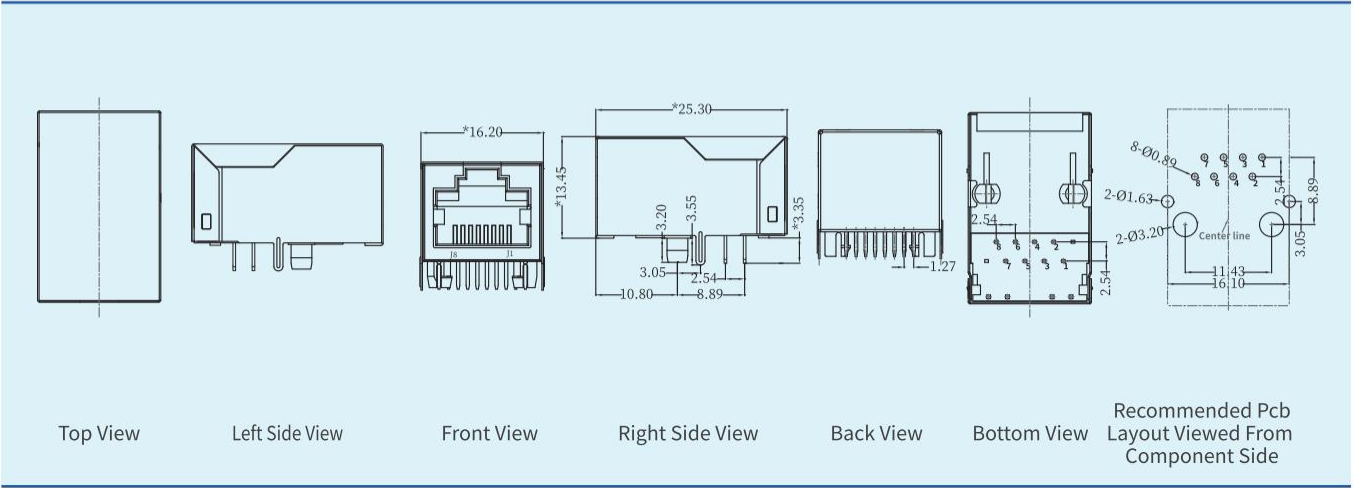

产品料号P/N:SYT311****HWA4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional


使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

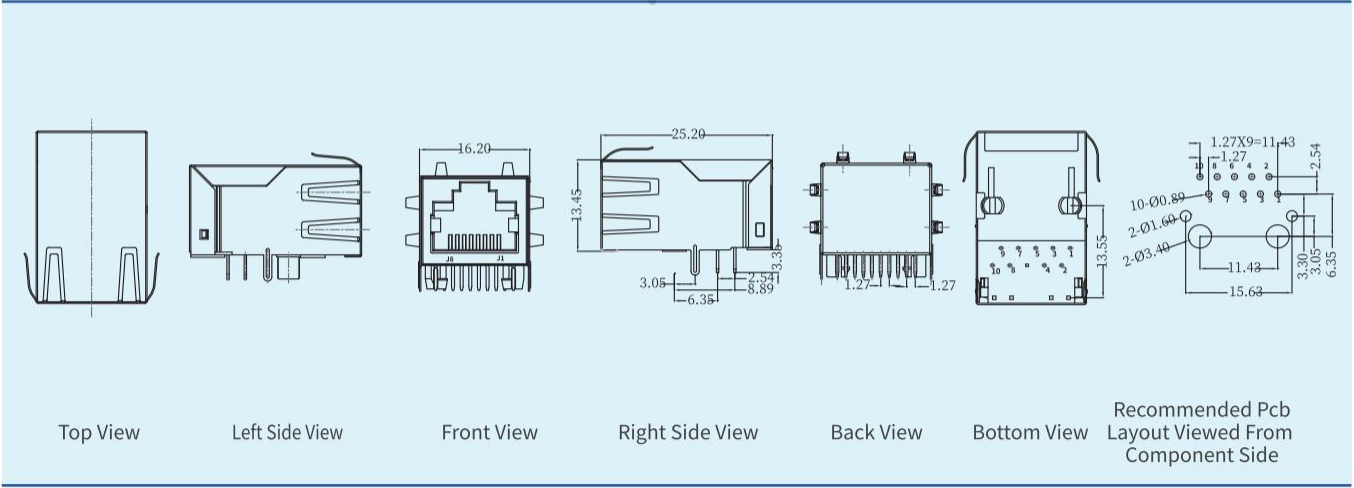

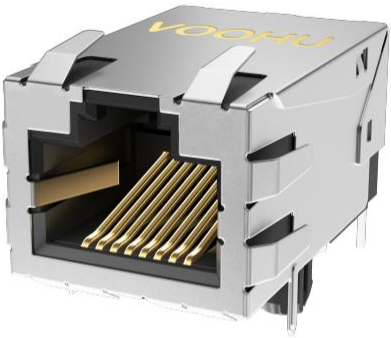


产品料号P/N:SYT311****HWA5D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: No
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

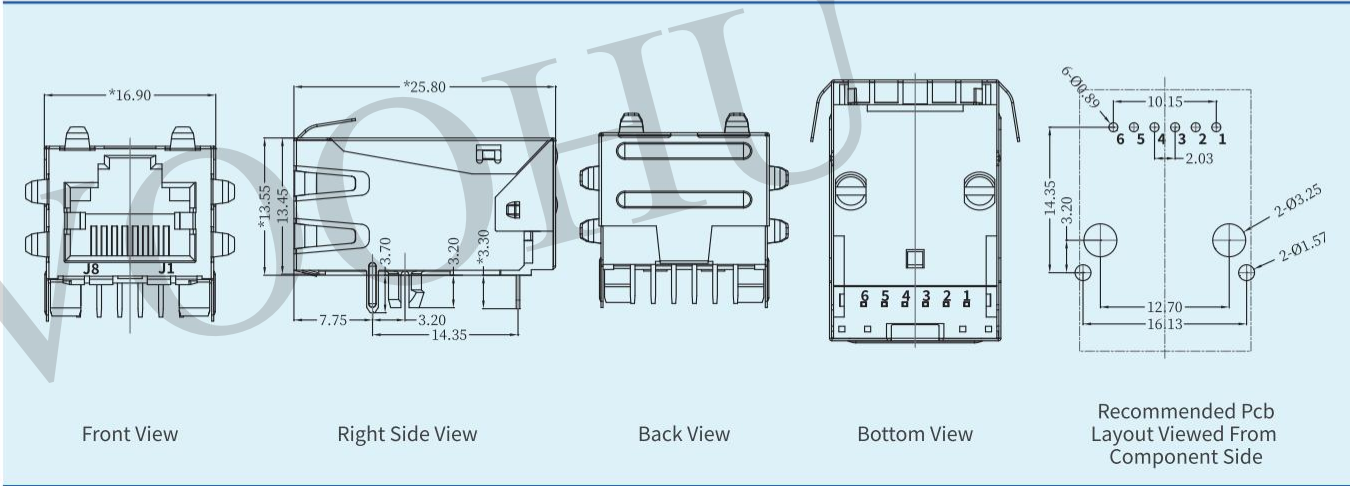



产品料号P/N:SYT311****AA2A4DN (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

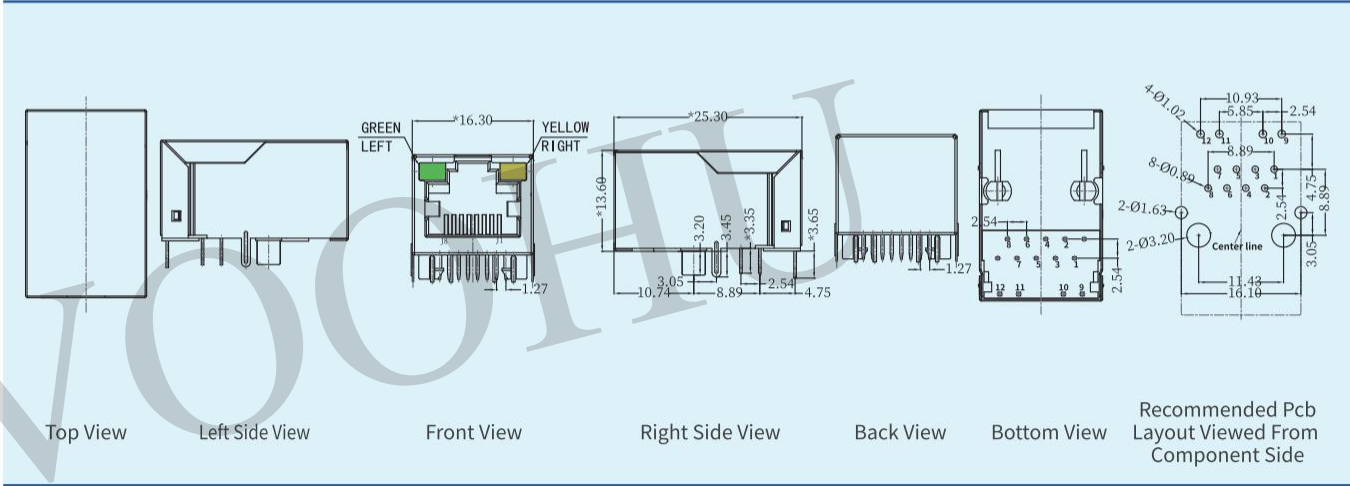


产品料号P/N:SYT311****DB2A4DN (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

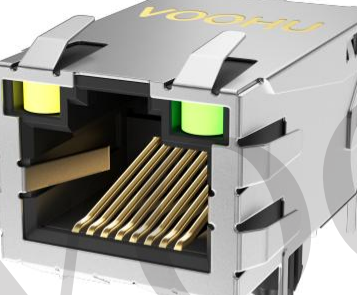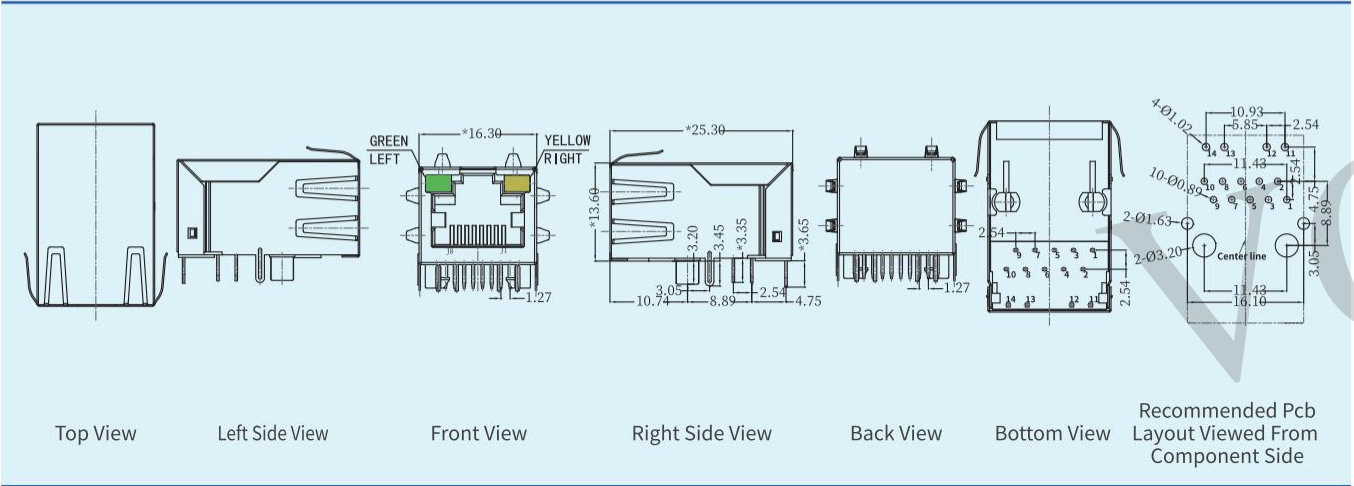

产品料号P/N:SYT311****DA1A5D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Yellow / R-Green
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

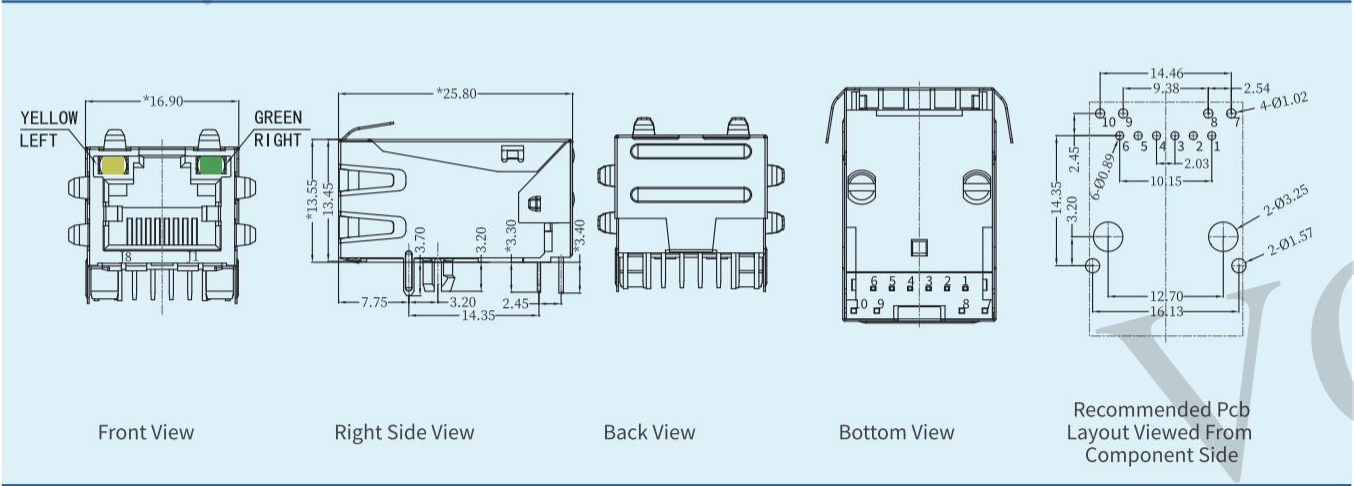

RJ45 1*N DIP 内置 10/100/1000M Base-T变压器系列 | RJ45 1*1 DIP with 10/100/1000M Base-T transformer series

RJ45 1*N DIP 内置 10/100/1000M Base-T变压器系列 | RJ45 1*1 DIP with 10/100/1000M Base-T transformer series



产品料号P/N:SYT411****JB2A1DP(POE) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

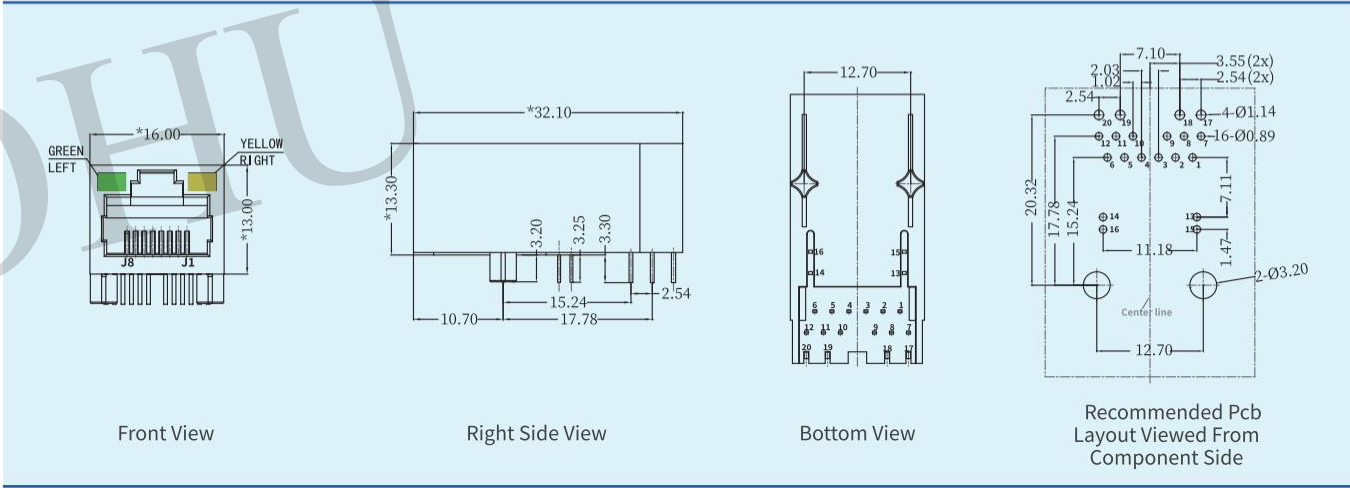

产品料号P/N:SYT411****GWA1DPC (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

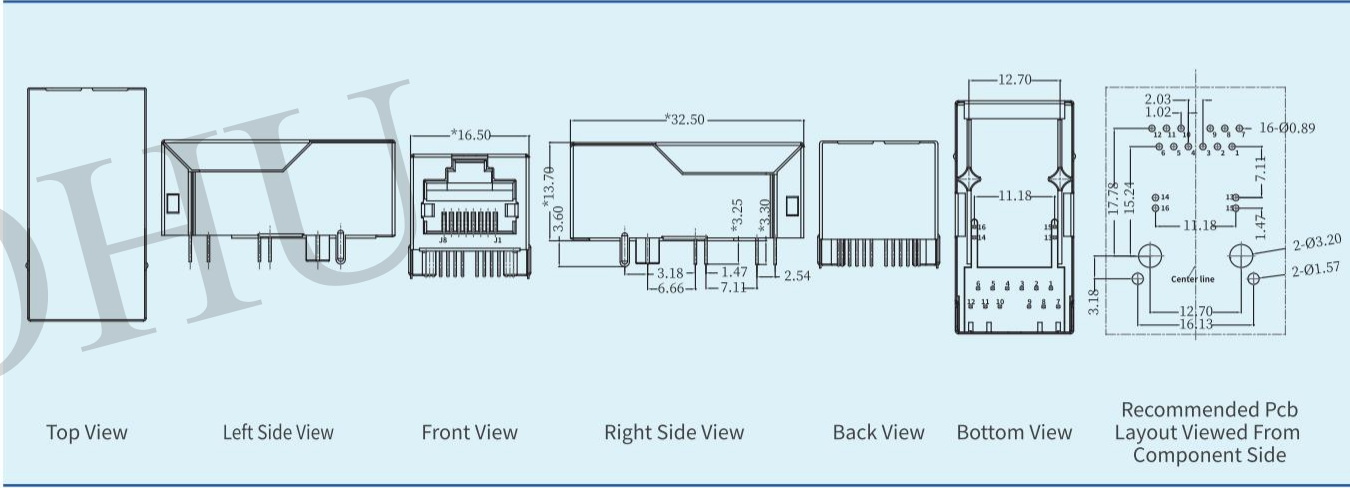

产品料号P/N:SYT411****HWA1DP(POE) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

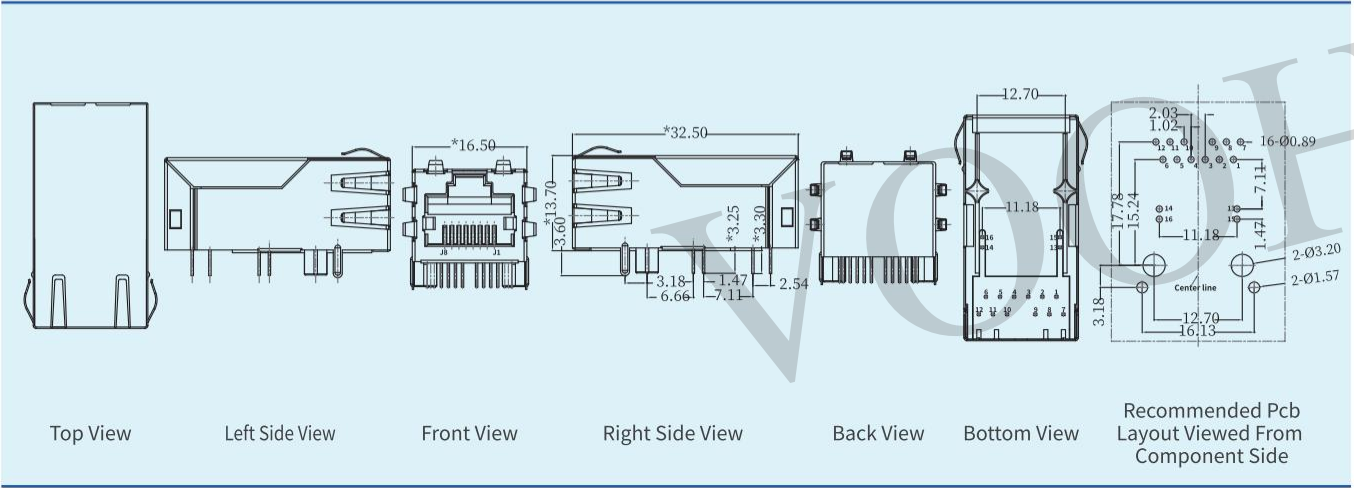

产品料号P/N:SYT411****AB2A1DP(POE) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

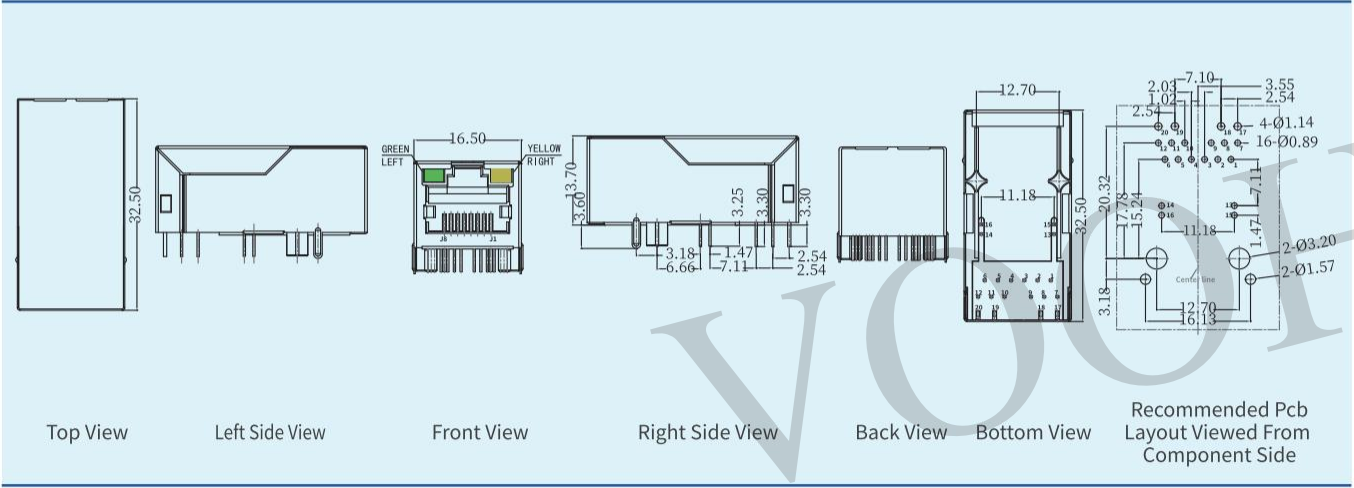


RJ45 1*N DIP 内置 10/100/1000M Base-T变压器系列 | RJ45 1*1 DIP with 10/100/1000M Base-T transformer series

RJ45 1*N DIP 内置 10/100/1000M Base-T变压器系列 | RJ45 1*1 DIP with 10/100/1000M Base-T transformer series




产品料号P/N:SYT411****DB2A1DP (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

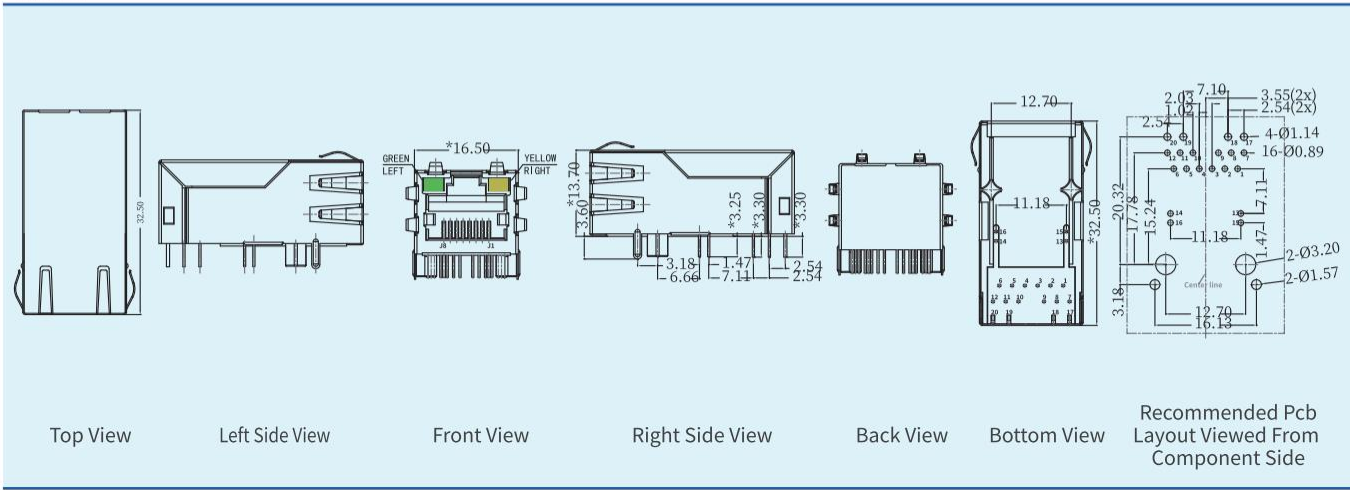


产品料号P/N:SYT511****JA2A8D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

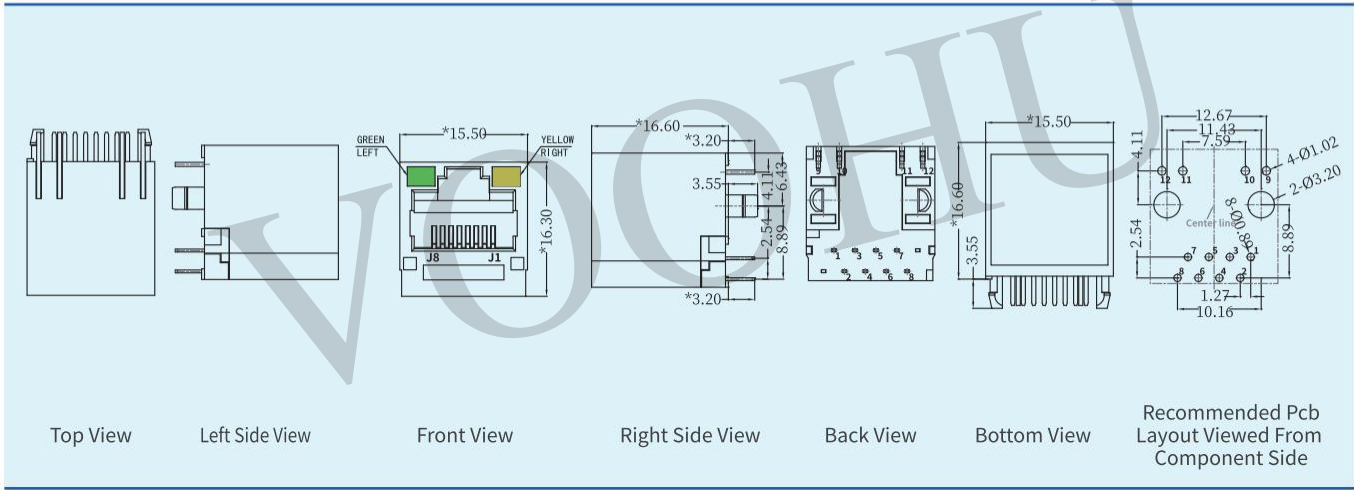


产品料号P/N:SYT511****IWA8D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: No
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

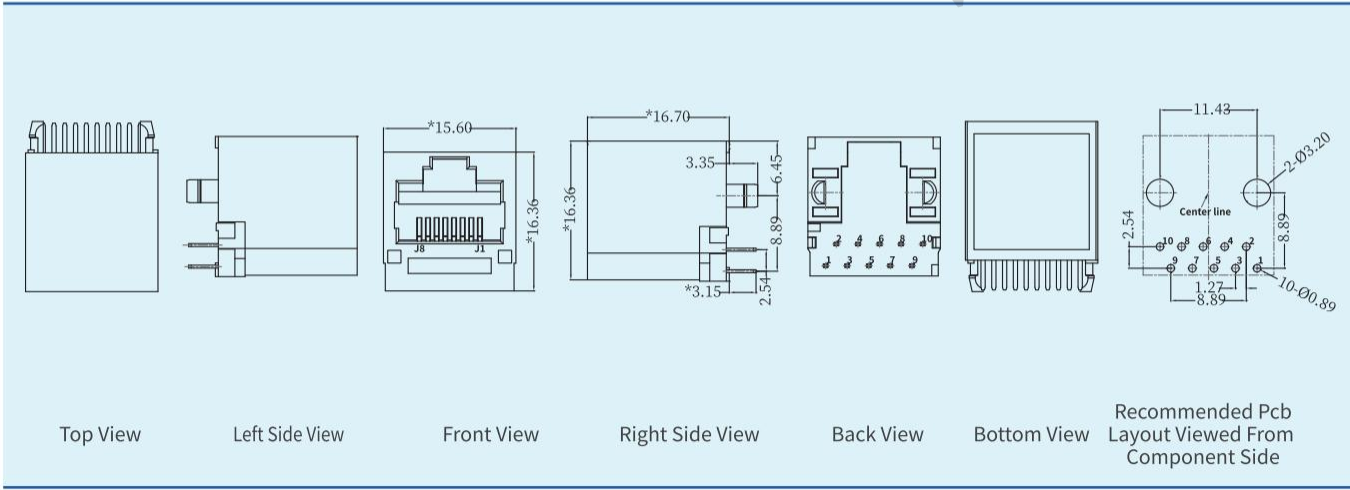

产品料号P/N:SYT511****GWA4D12 (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: No
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

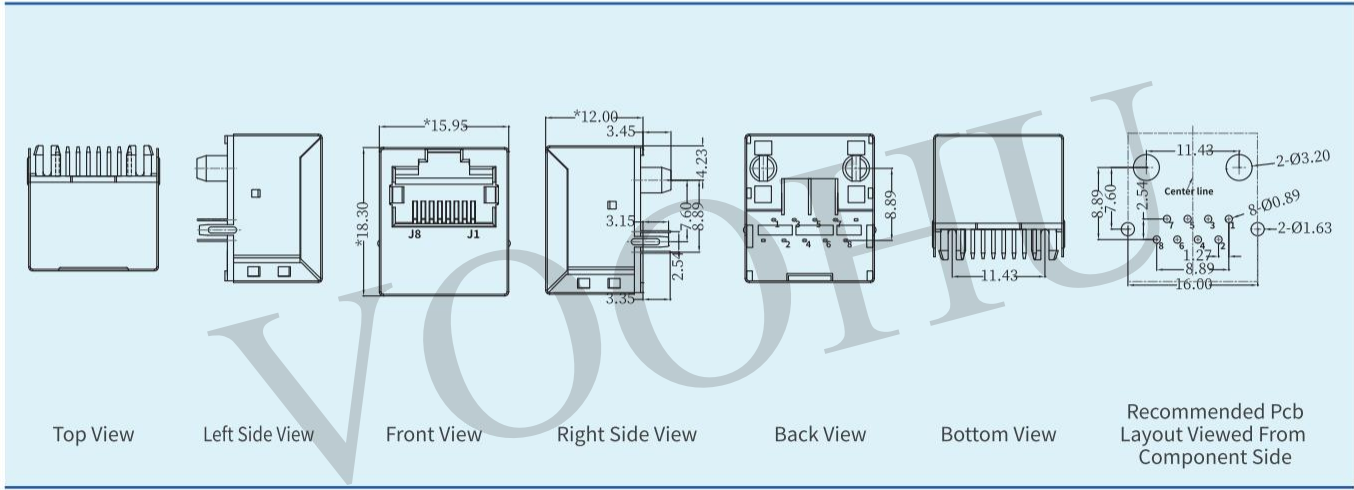




产品料号P/N:SYT511****GWA8D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: No
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

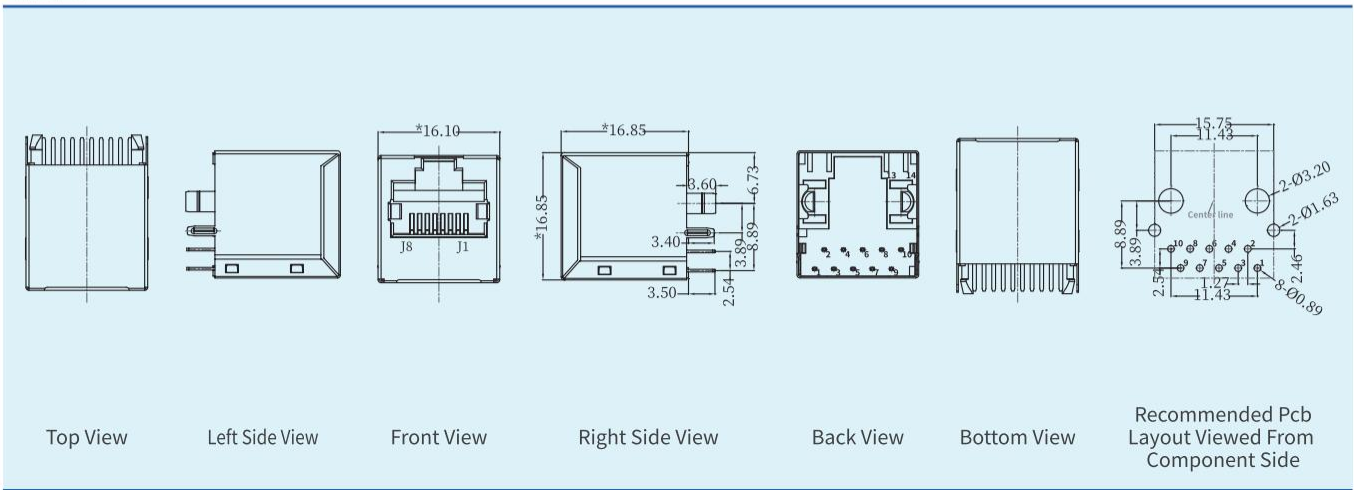


产品料号P/N:SYT511****AB2A8D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

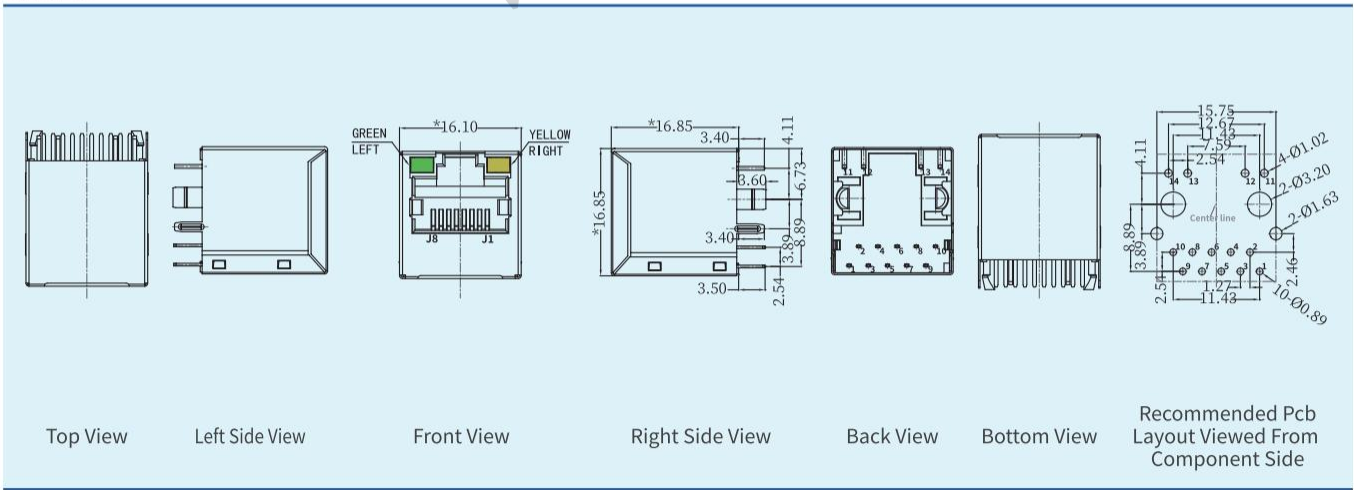


产品料号P/N:SYT511****AA1A1D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Yellow / R-Green
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

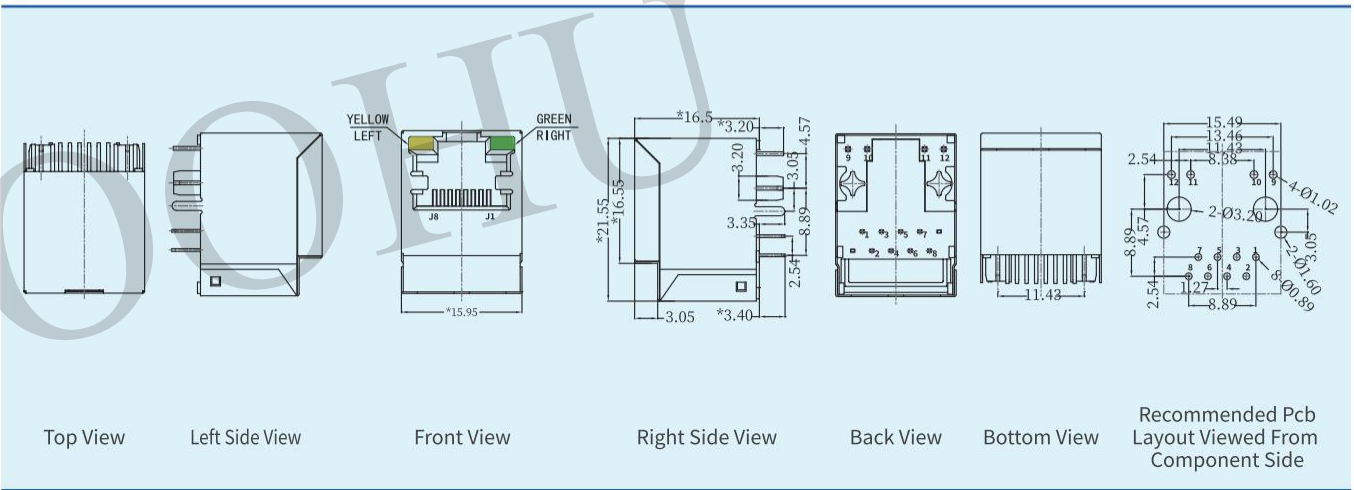

产品料号P/N:SYT511****AC1A8D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Yellow / R-Green
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

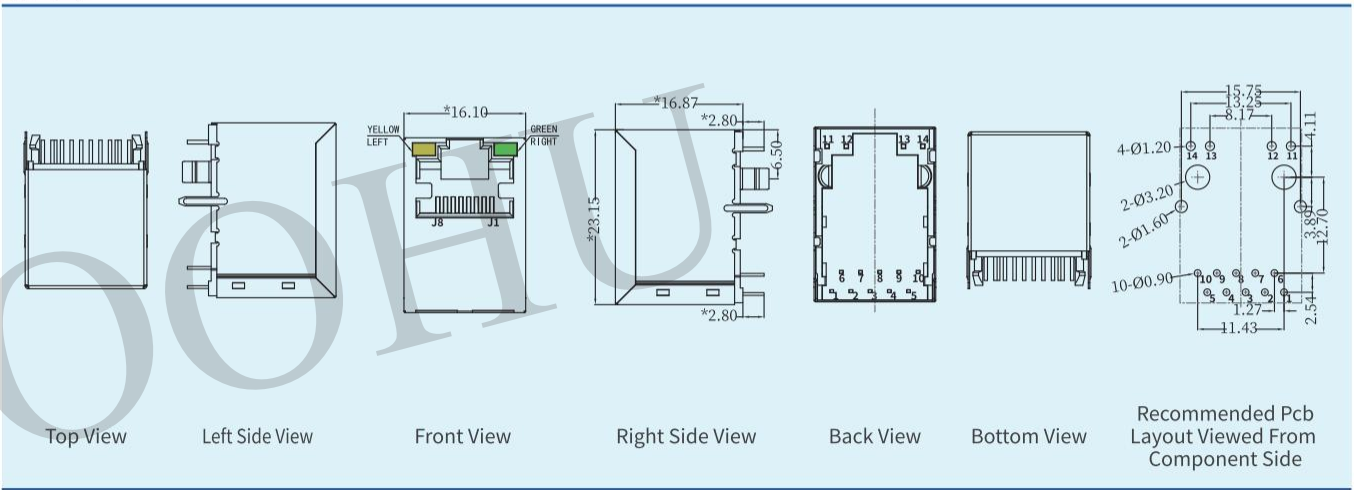




产品料号P/N:SYT811****GWA2DB (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: No
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

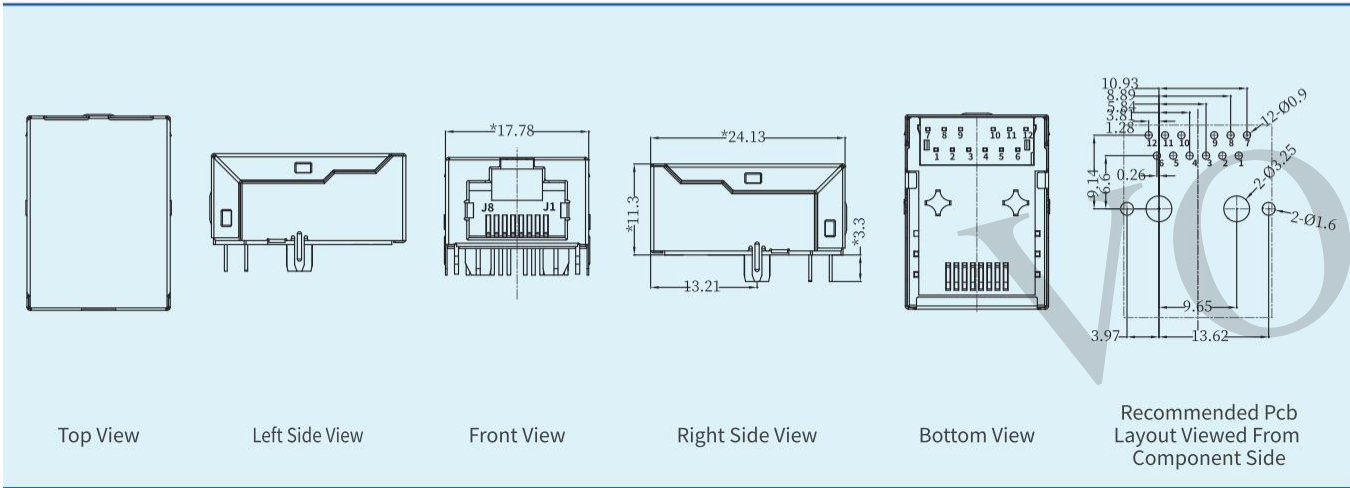


产品料号P/N:SYT811****CD2A2DC (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

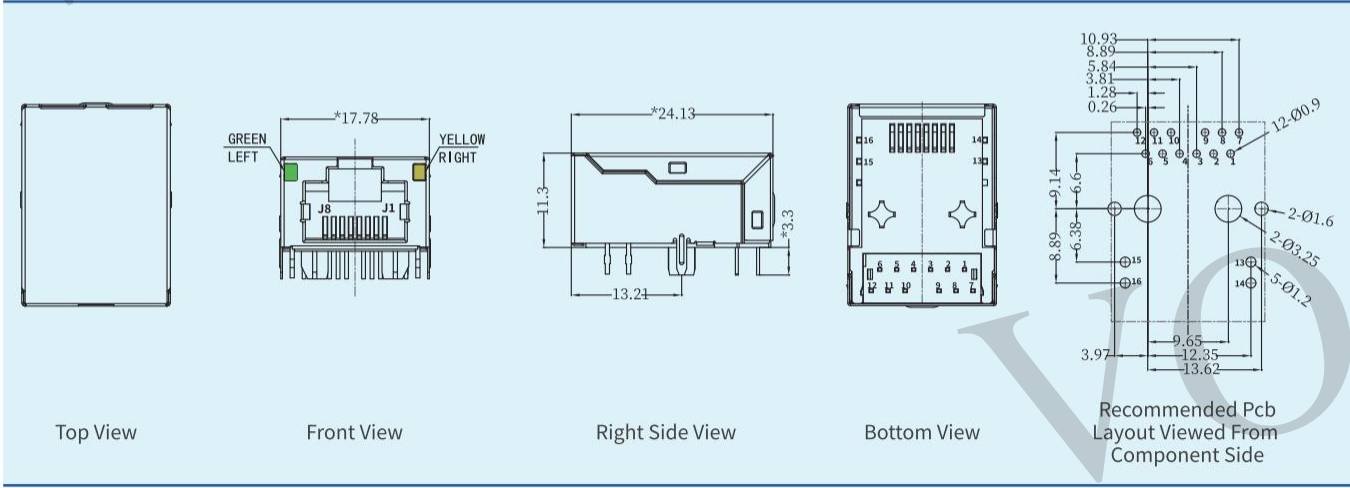


产品料号P/N:SYT811****HWA2DC (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: No
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

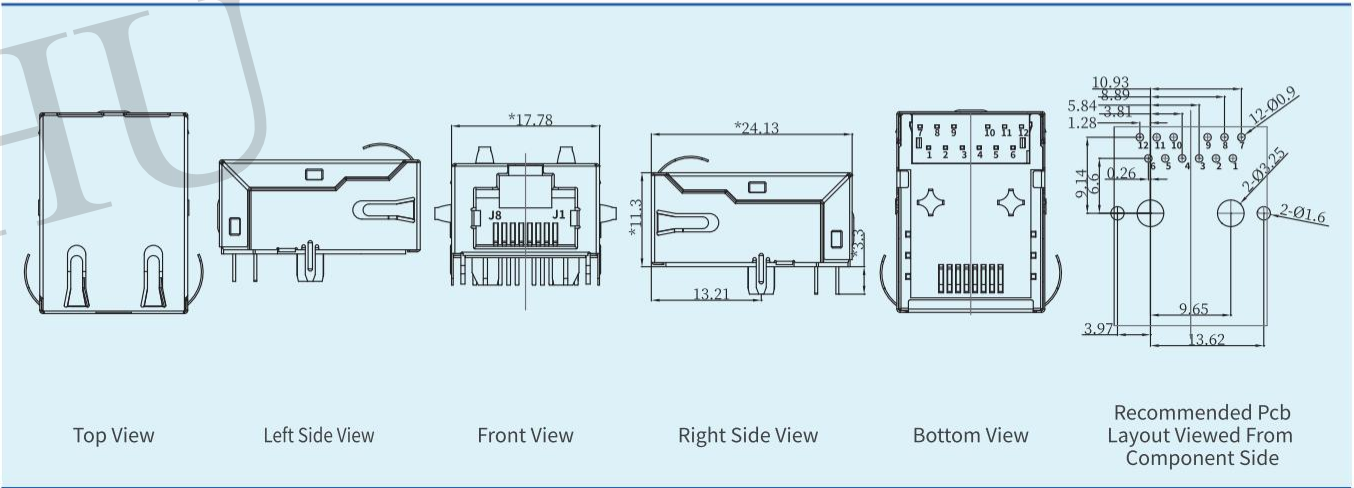

产品料号P/N:SYT811****FD1A2D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Yellow / R-Green
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

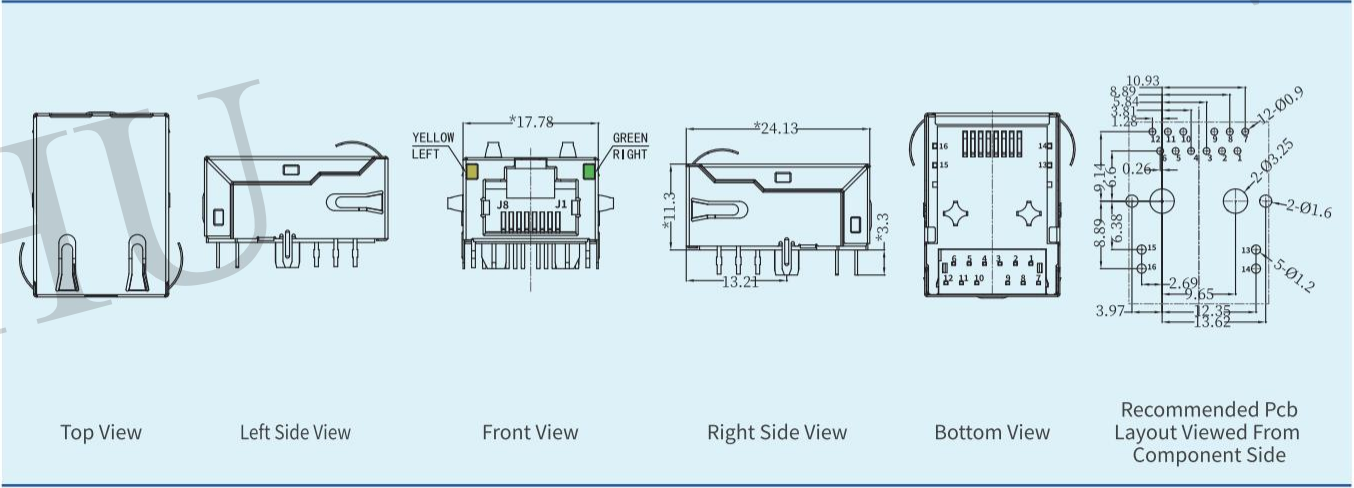



产品料号P/N:SYT1211****FF1A10D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / Yellow / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

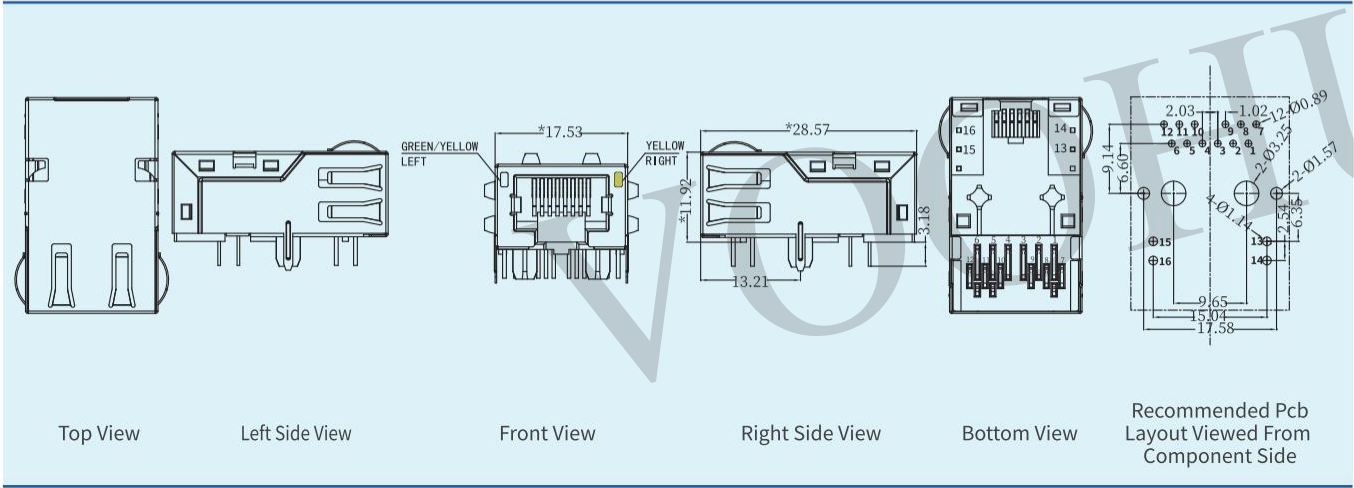

产品料号P/N:SYT1611****GWA2D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

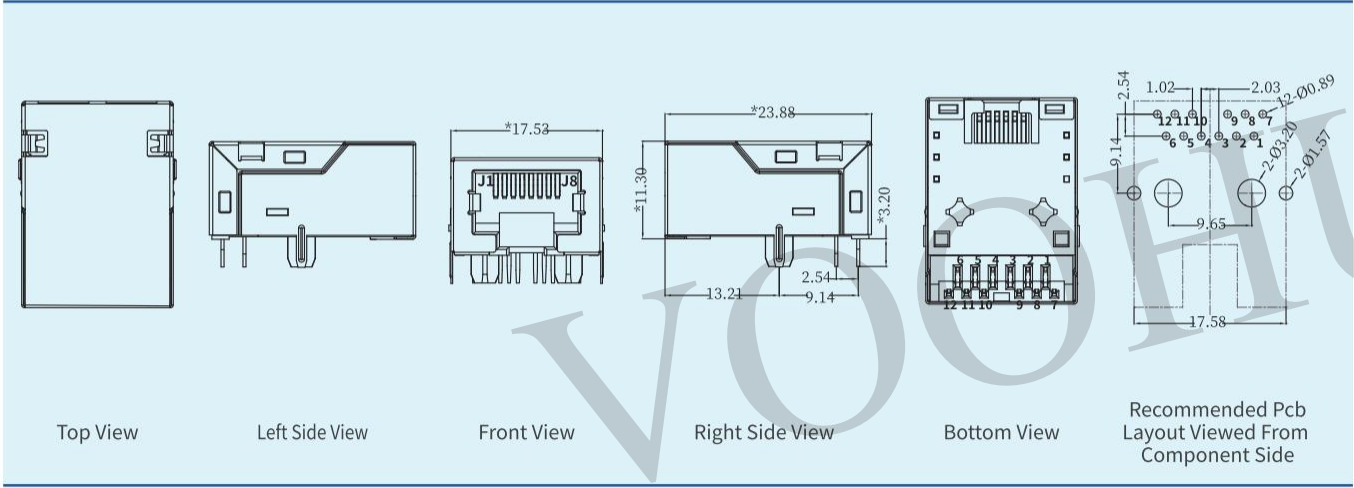

产品料号P/N:SYT1611****CD1A10DB (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Yellow / R-Green


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

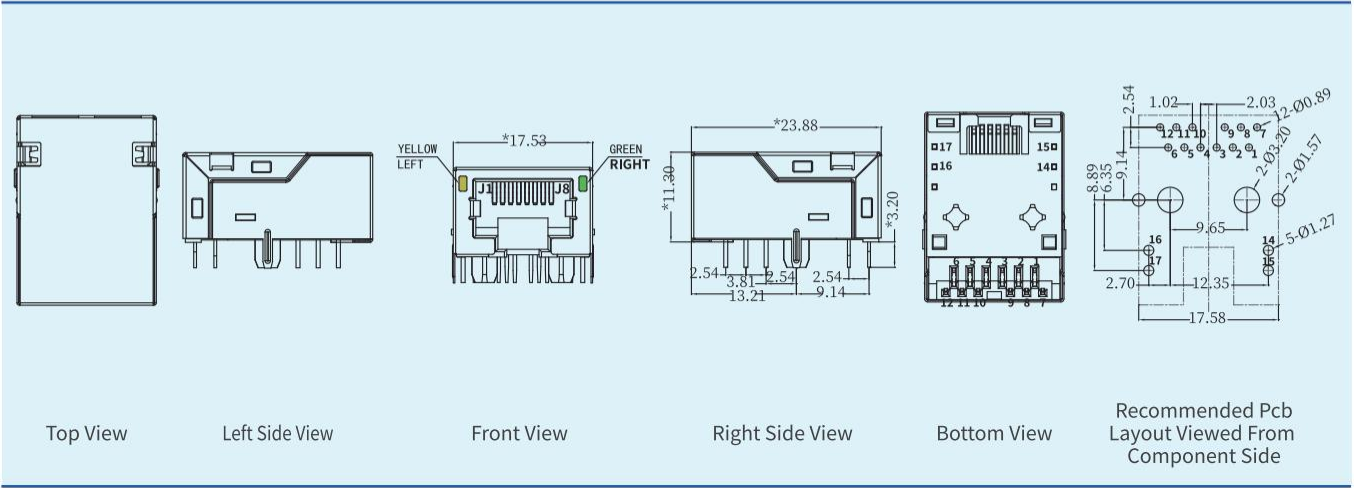

产品料号P/N:SYT1611****FA1A10DB (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Yellow / R-Green


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

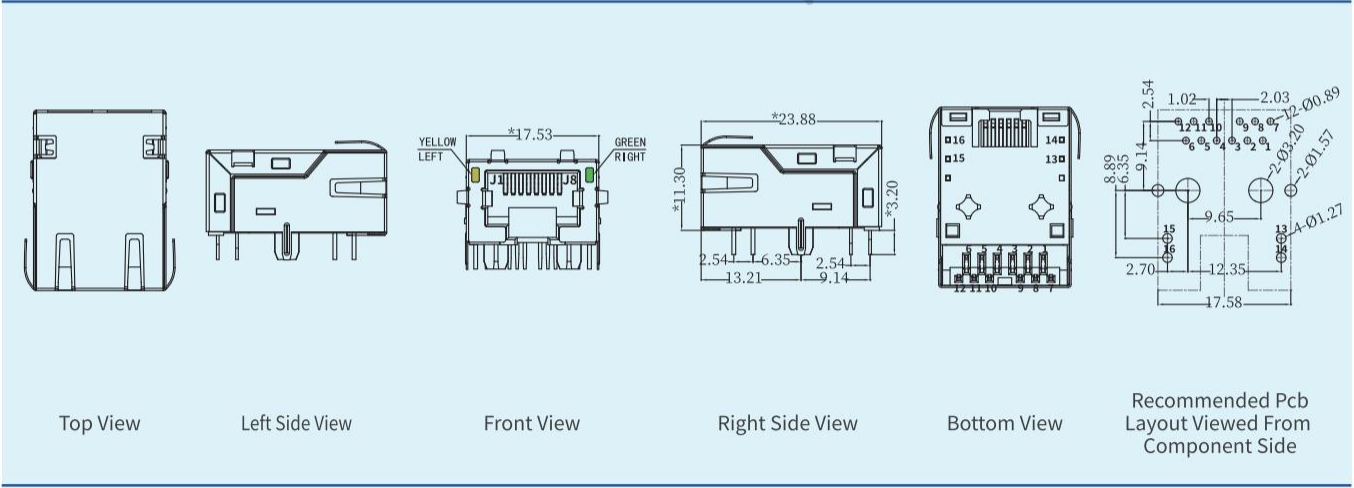

RJ45 1*N DIP 内置 10/100/1000M Base-T变压器系列 | RJ45 1*2 DIP with 10/100/1000M Base-T transformer series



RJ45 1*N DIP 内置 10/100/1000M Base-T变压器系列 | RJ45 1*2 DIP with 10/100/1000M Base-T transformer series

RJ45 1*N DIP 内置 10/100/1000M Base-T变压器系列 | RJ45 1*2 DIP with 10/100/1000M Base-T transformer series



产品料号P/N:SYT112****AE4A1D3 (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Green / Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

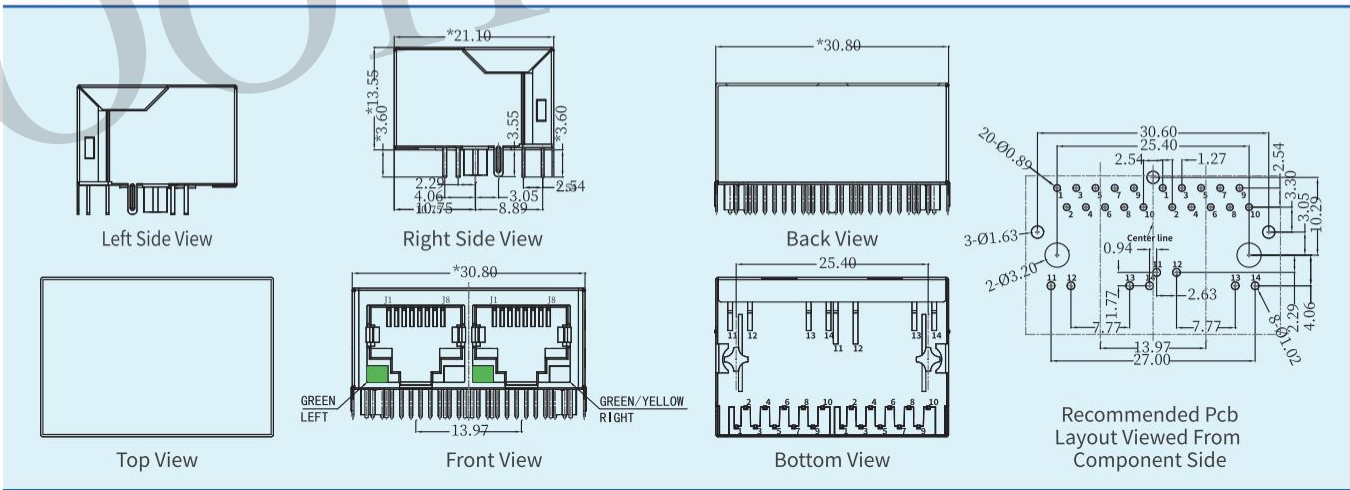



产品料号P/N:SYT112****DA1A1D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Yellow / R-Green


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

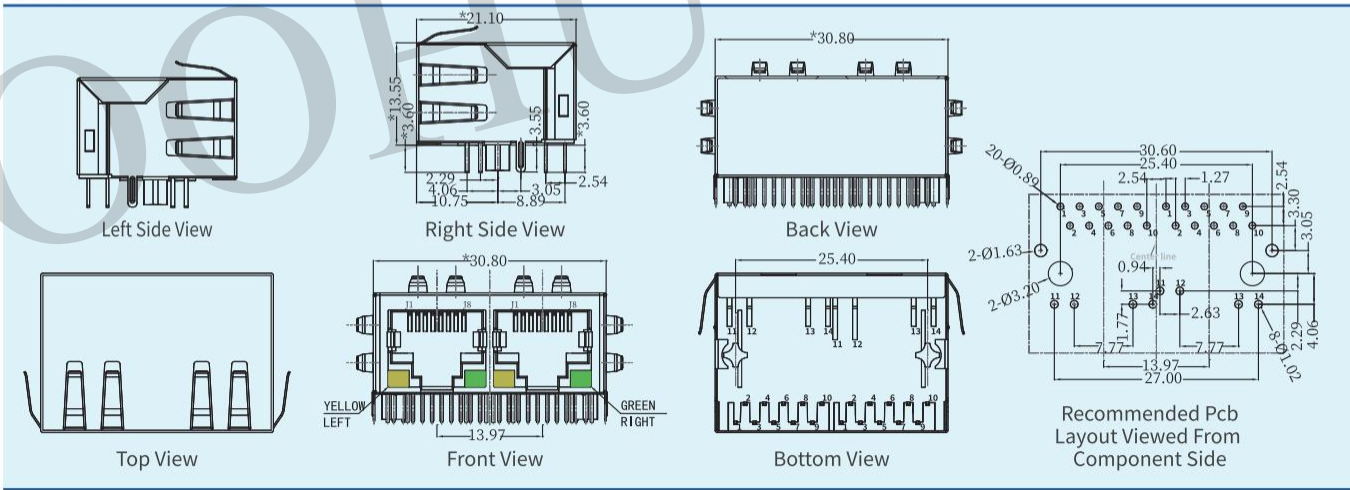



产品料号P/N:SYT312****IWA4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional


使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

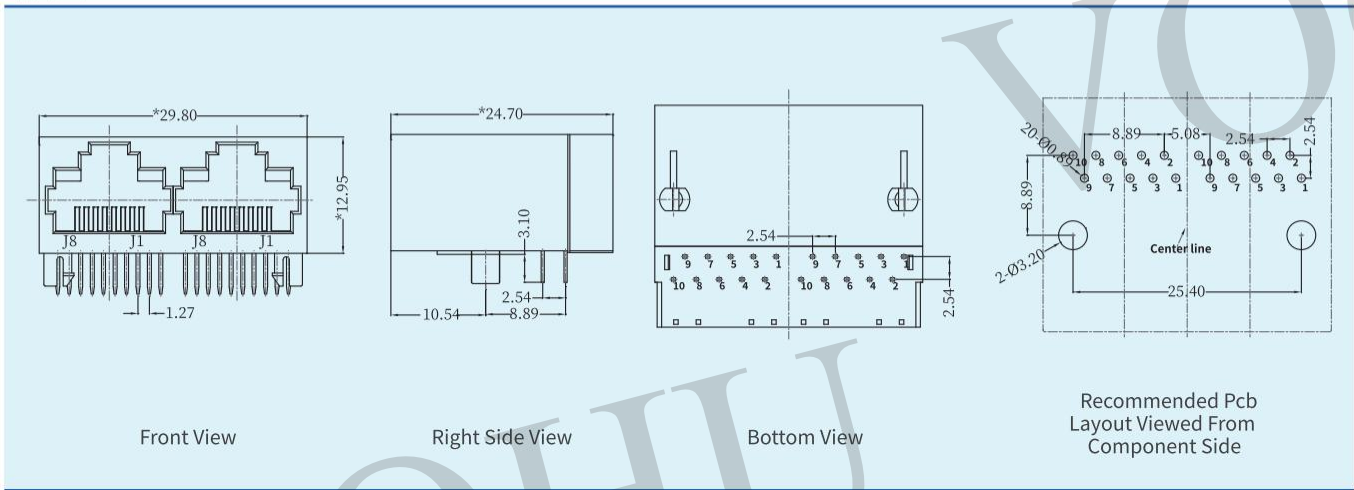

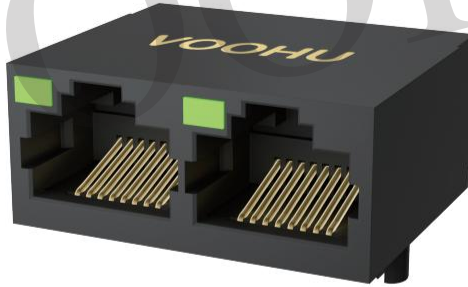

产品料号P/N:SYT312****JB6A4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

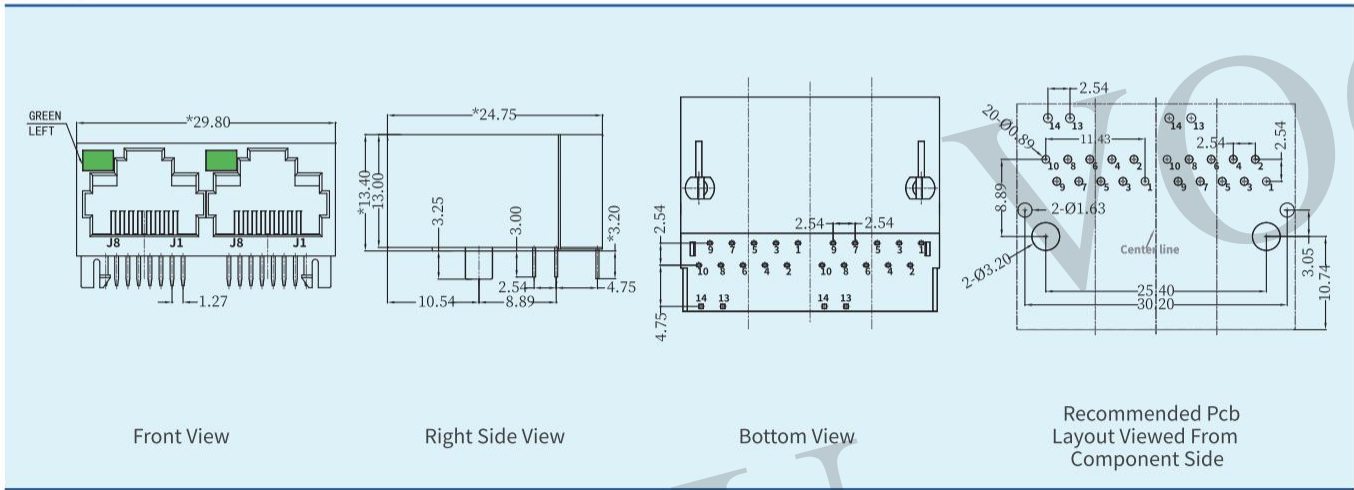


RJ45 1*N DIP 内置 10/100/1000M Base-T变压器系列 | RJ45 1*2 DIP with 10/100/1000M Base-T transformer series

RJ45 1*N DIP 内置 10/100/1000M Base-T变压器系列 | RJ45 1*2 DIP with 10/100/1000M Base-T transformer series




产品料号P/N:SYT312****HWA4D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: No
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

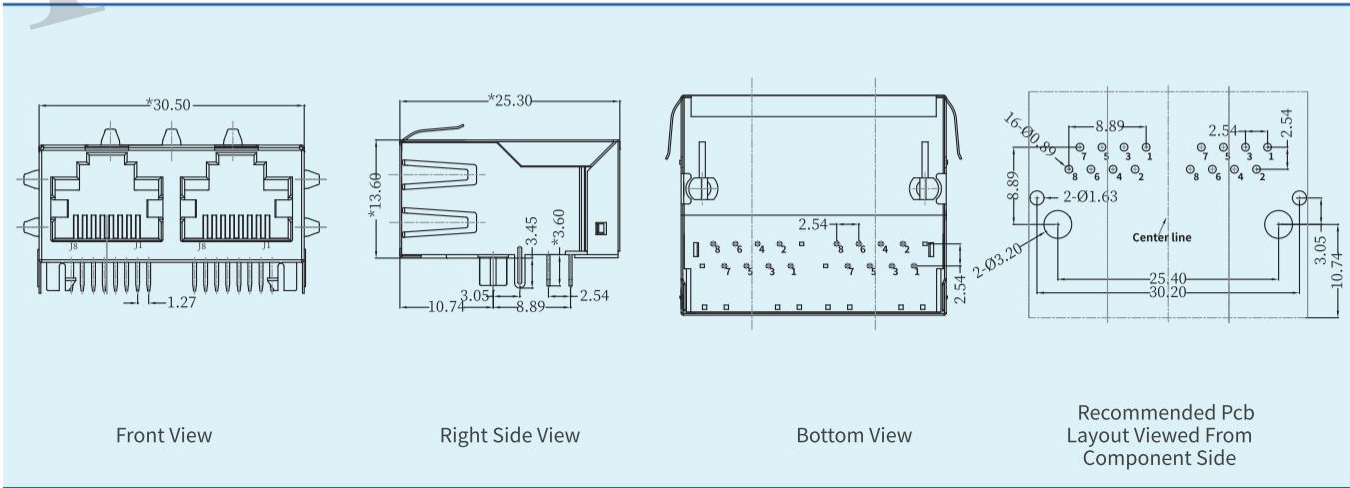


产品料号P/N:SYT312****DB2A4D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

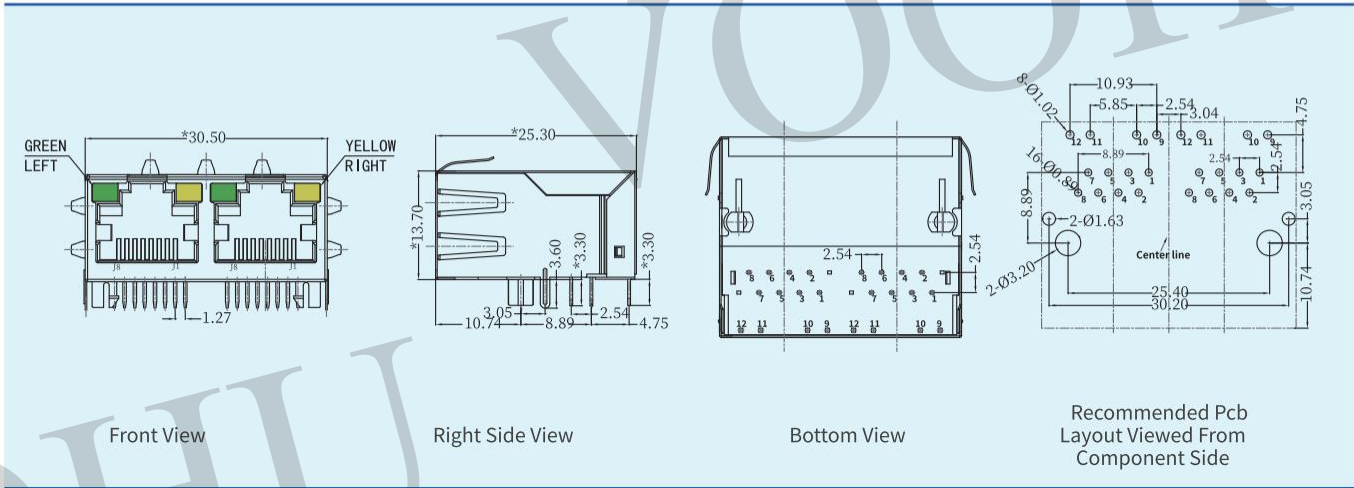


产品料号P/N:SYT312****AB2A4D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

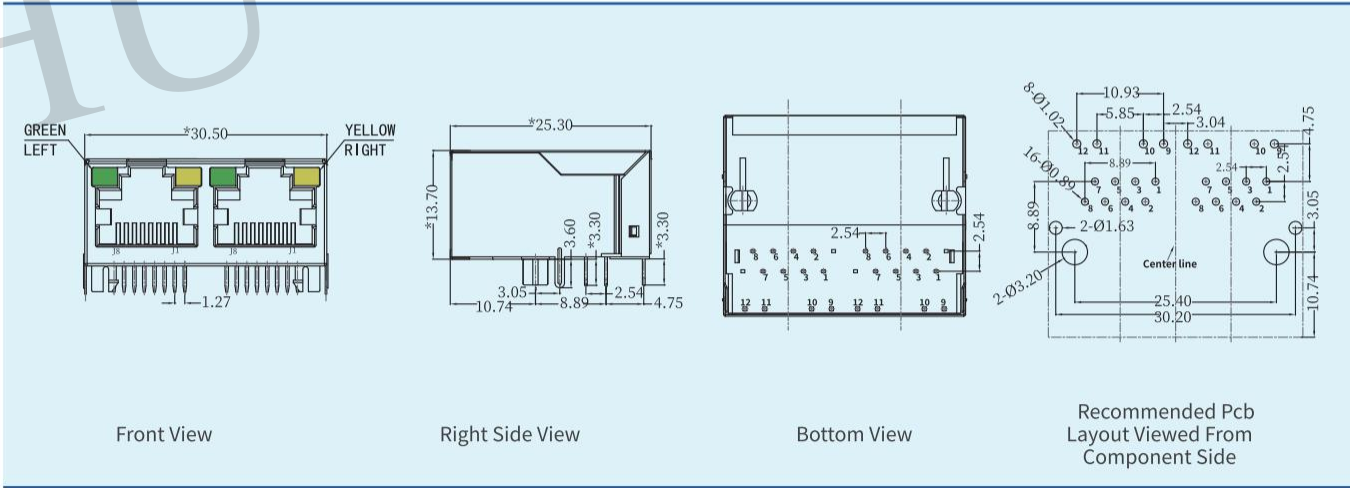

产品料号P/N:SYT114****IWA1DDJ (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: No
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

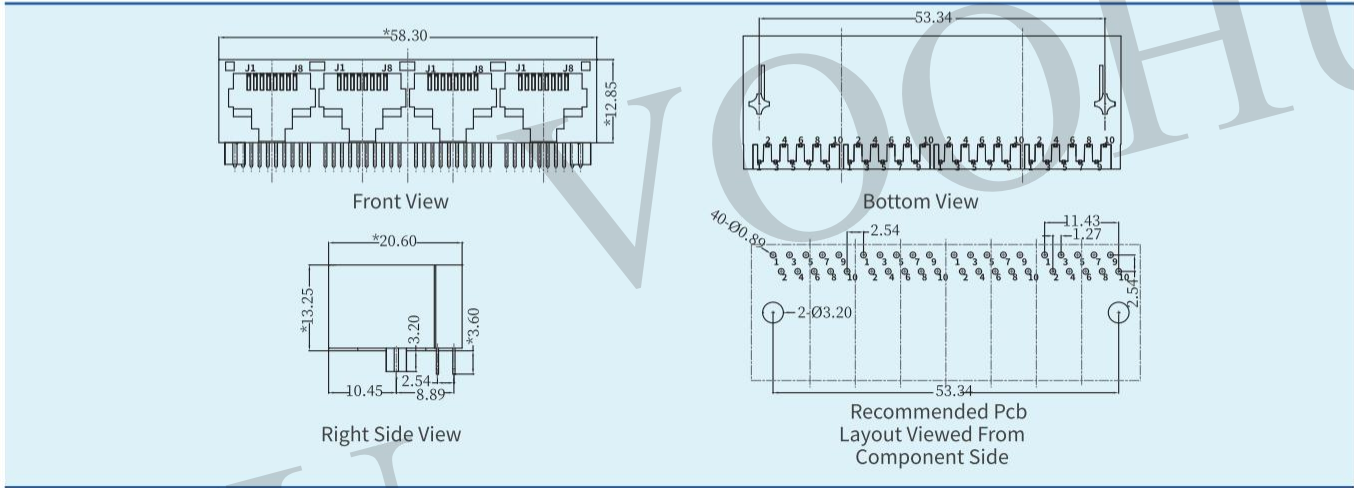





产品料号P/N:SYT114****GWA1D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: No
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

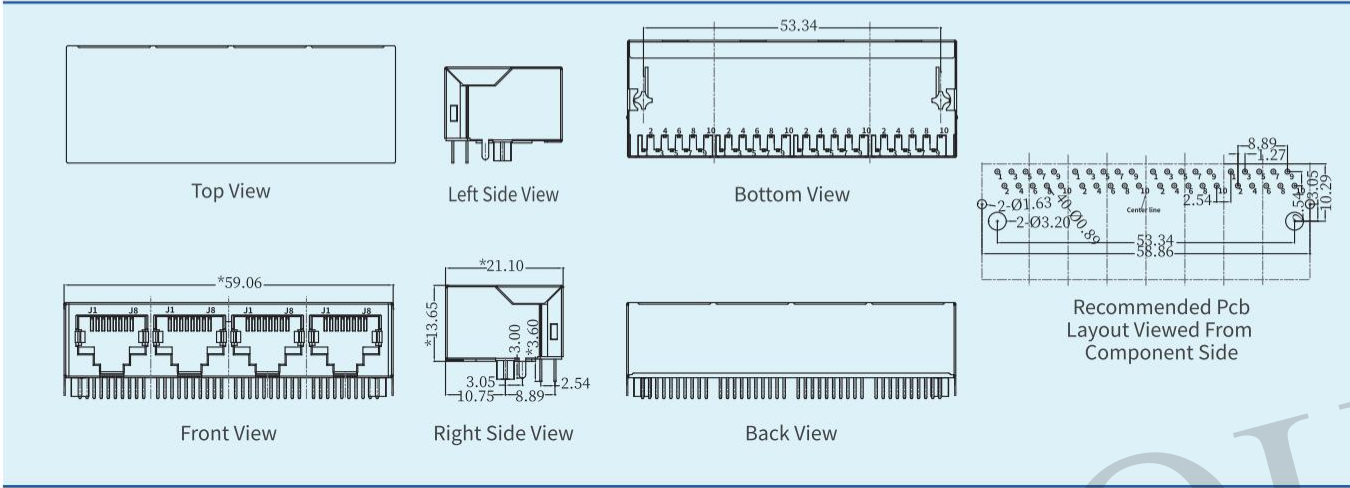



产品料号P/N:SYT114****HWA1D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: No
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

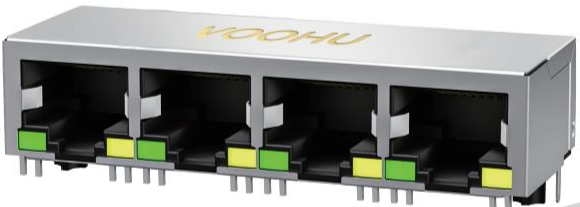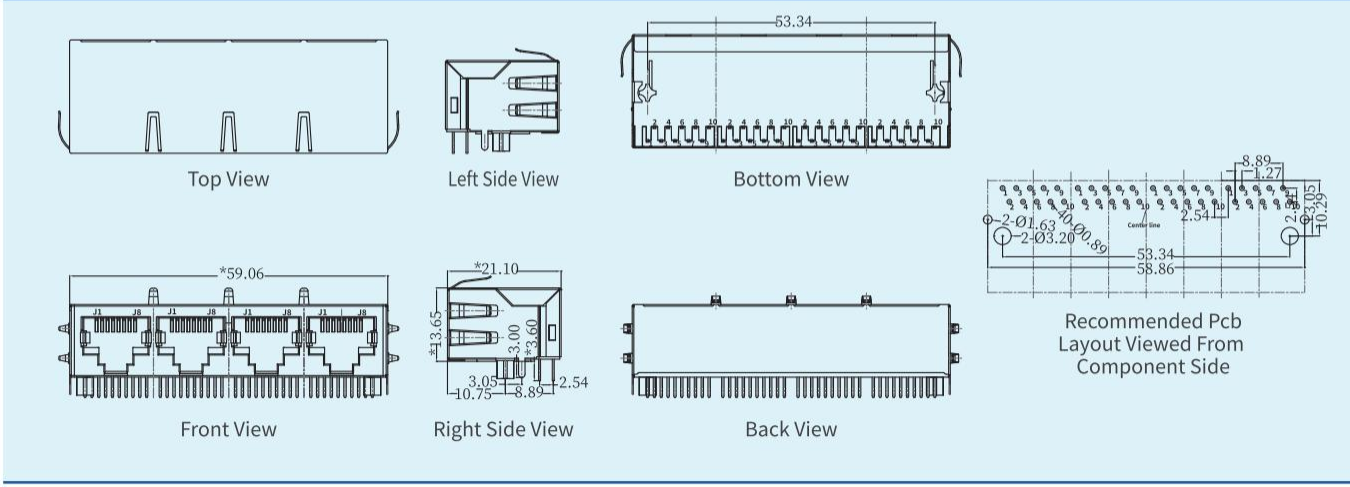


产品料号P/N:SYT114****AA2A1D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

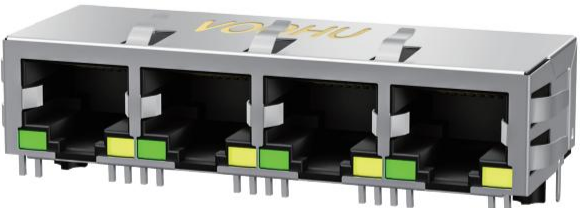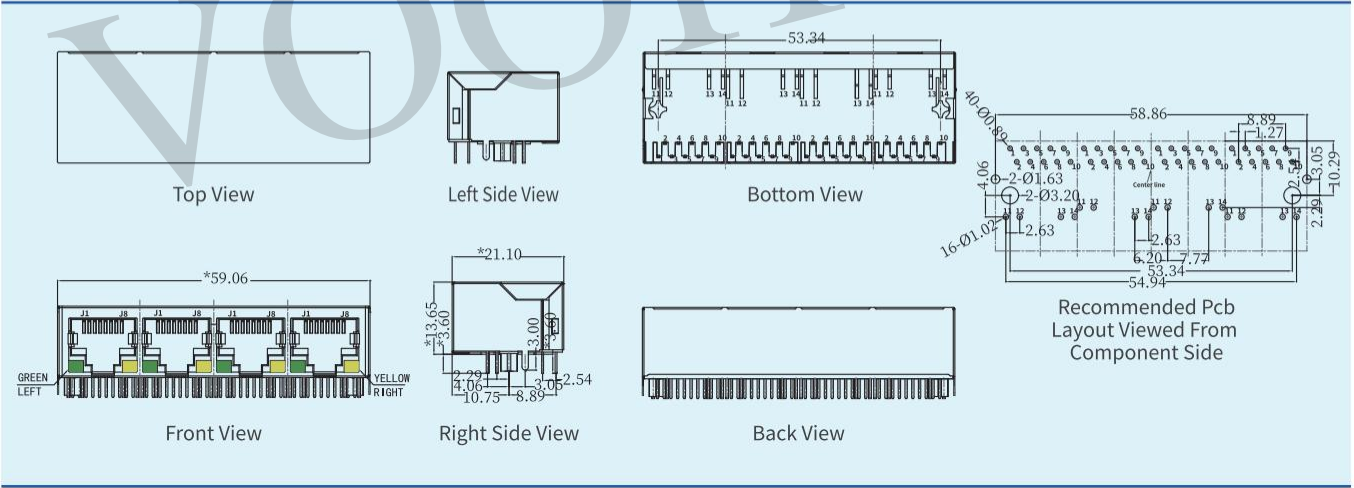

产品料号P/N:SYT114****DA2A1D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

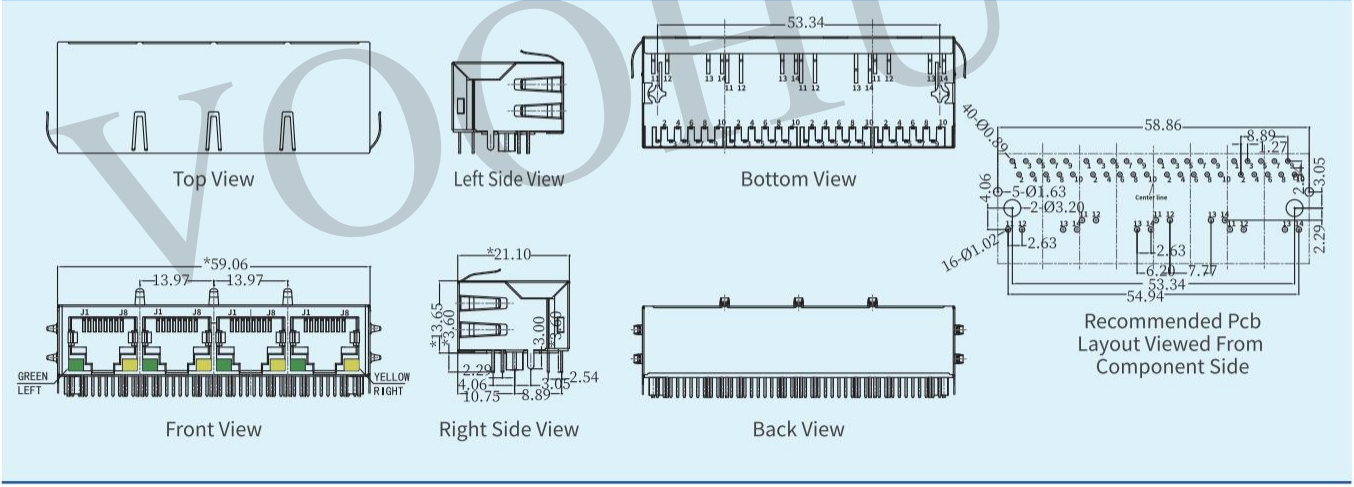




产品料号P/N:SYT314****HWA2D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: No
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

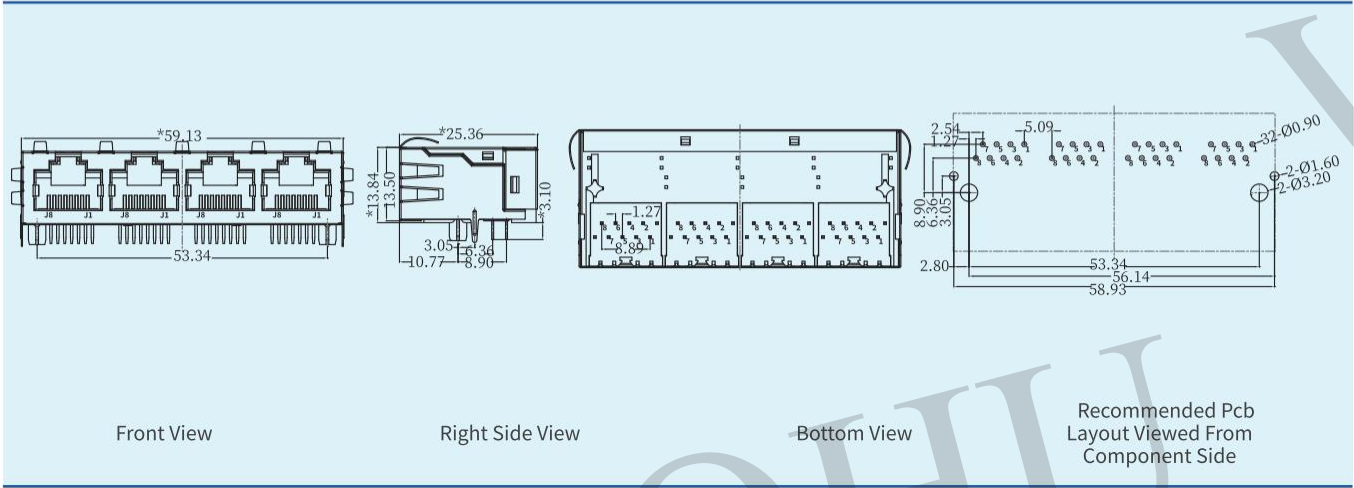


产品料号P/N:SYT314****CD2A2D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

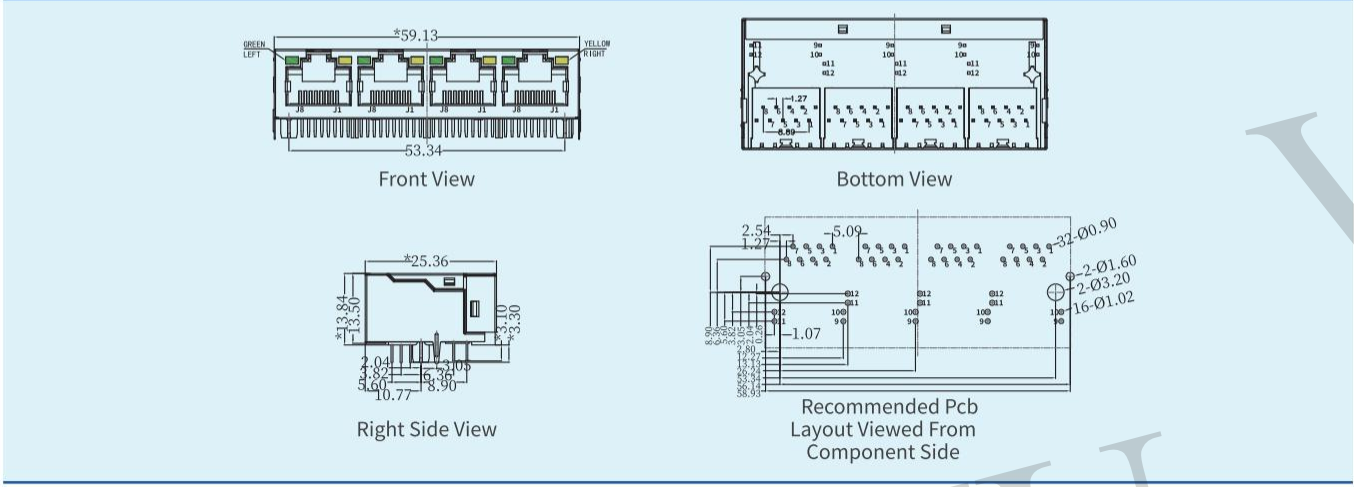


产品料号P/N:SYT414****DB2A2DPB(POE+) (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

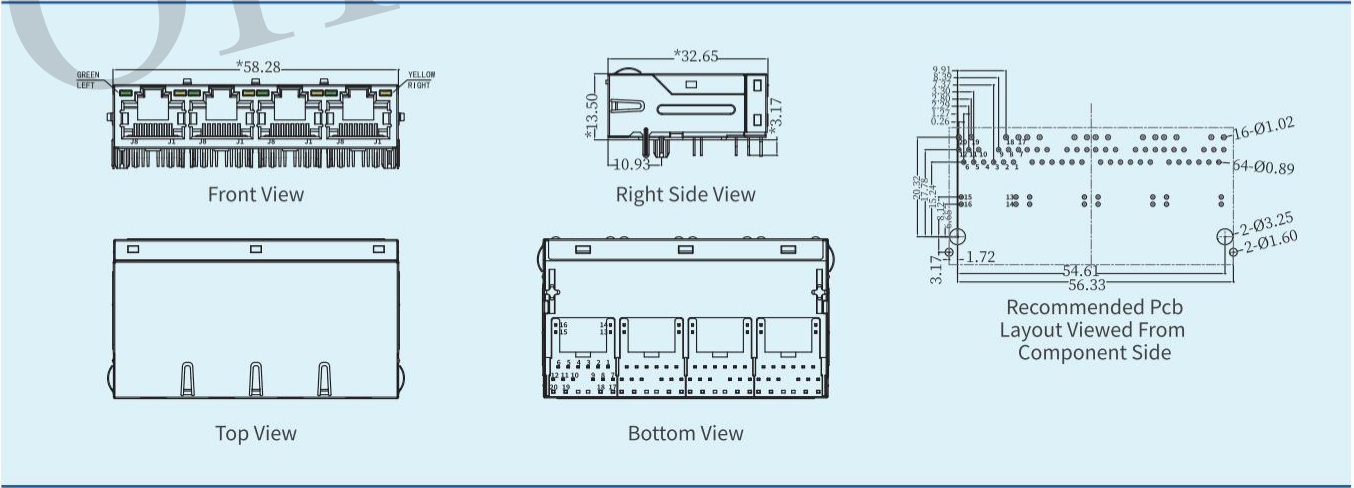

产品料号P/N:SYT611****GWWD (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 with USB2.0 Connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: No
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

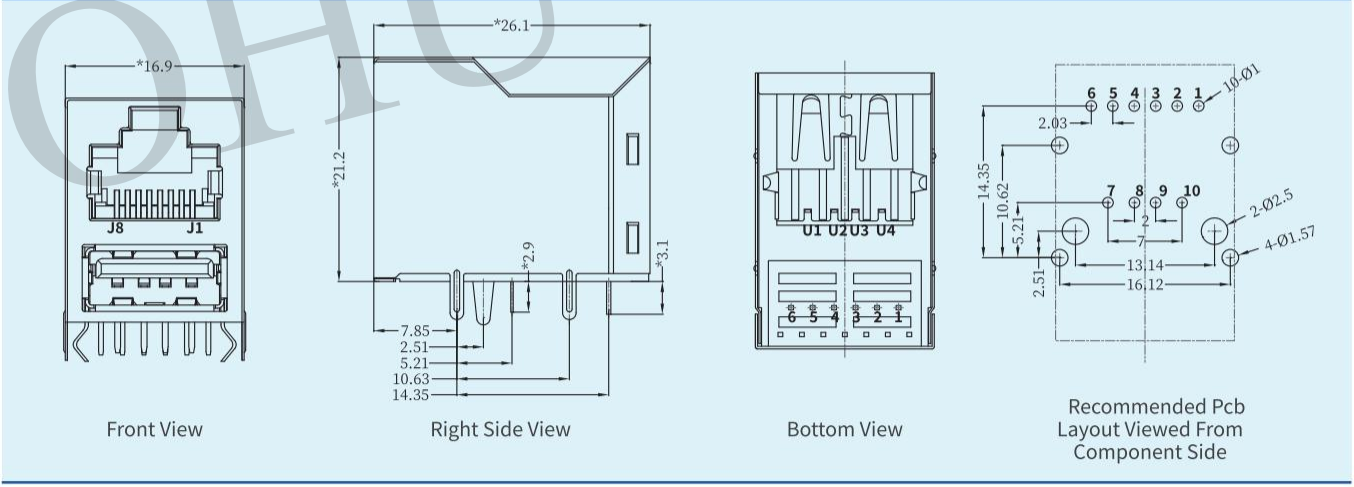



产品料号P/N:SYT611****DF5WD (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 with USB2.0 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz, 0.1V

是否带灯With LED: Yes, L-Green / Orange / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

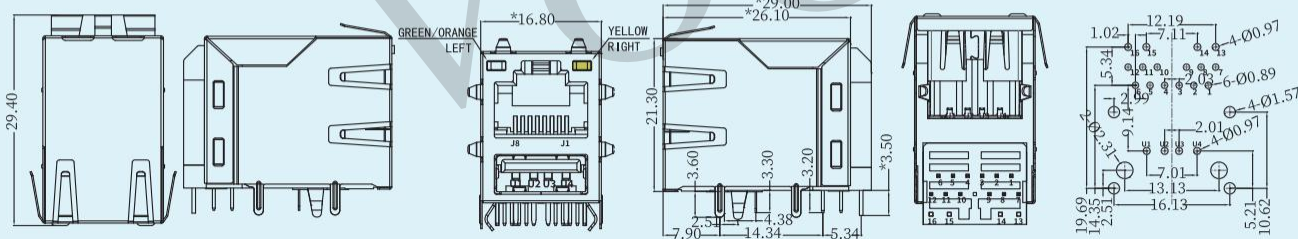

Top View

Left Side View

Front View

Right Side View

Bottom View

Recommended Pcb
Layout Viewed From
Component Side

产品料号P/N:SYT711****AB2WD (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 with double USB2.0 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz, 0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

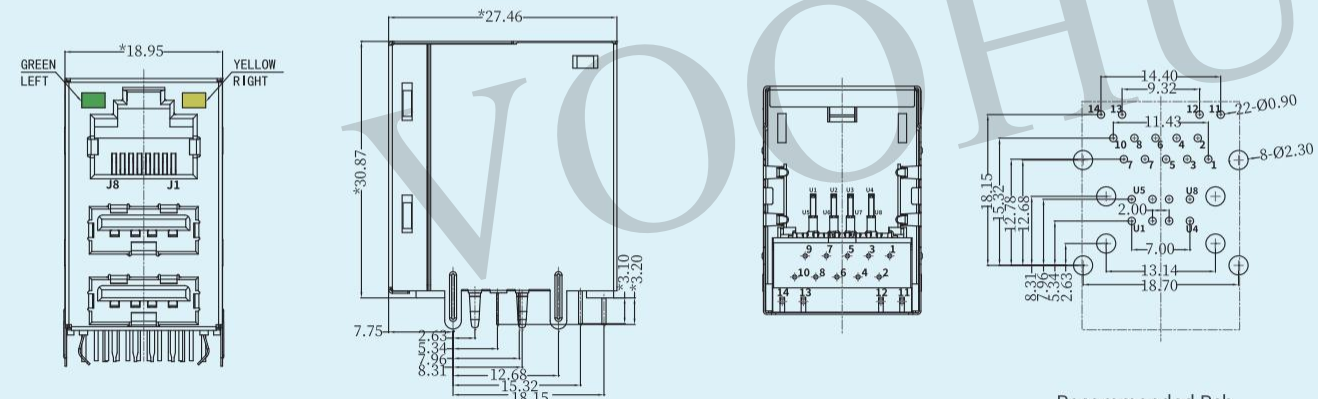

Front View

Right Side View

Bottom View

Recommended Pcb
Layout Viewed From
Component Side

产品料号P/N:SYT711U2****AF5WDB (****: see transformer code)

产品规格 Specifications:

类型Type: RJ45 with double USB2.0 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz, 0.1V

是否带灯With LED: Yes, L-Green / Orange / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

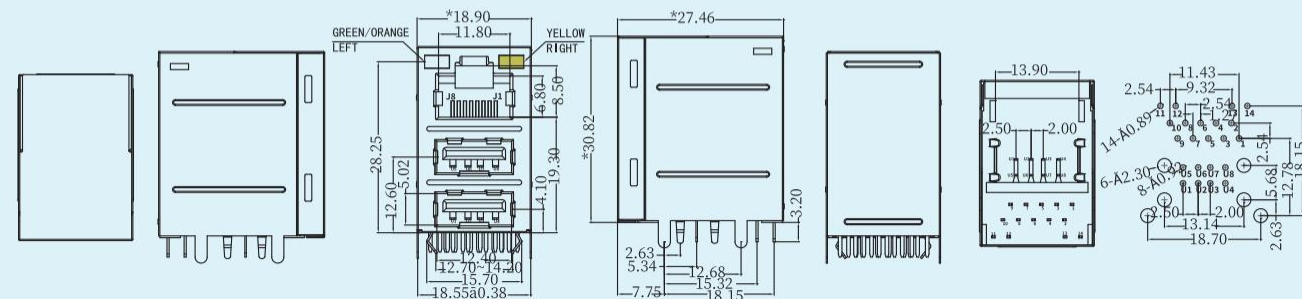

Top View

Left Side View

Front View

Right Side View

Back View

Bottom View

Recommended Pcb
Layout Viewed From
Component Side

产品料号P/N:SYT711****AA1W2D(USB3.0) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 with double USB2.0 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz, 0.1V

是否带灯With LED: Yes, L-Yellow / R-Green


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

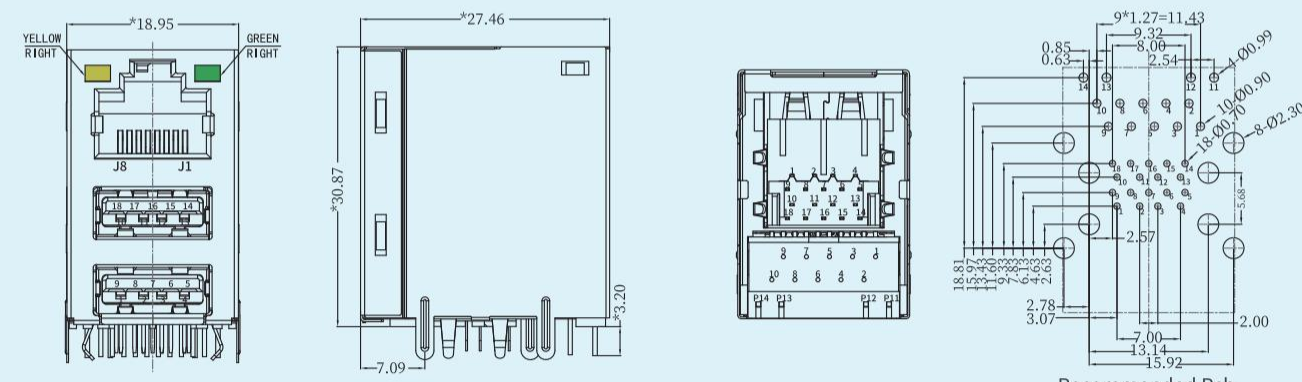

Front View

Right Side View

Bottom View

Recommended Pcb
Layout Viewed From
Component Side



产品料号P/N:SYT21****GWA2D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

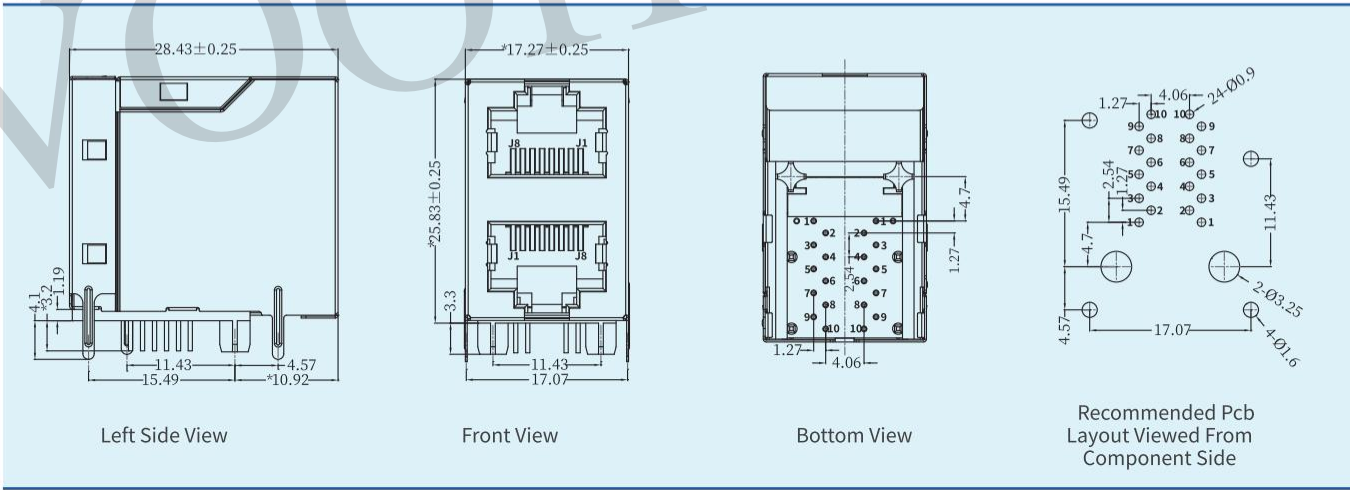

产品料号P/N:SYT21****GWA4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

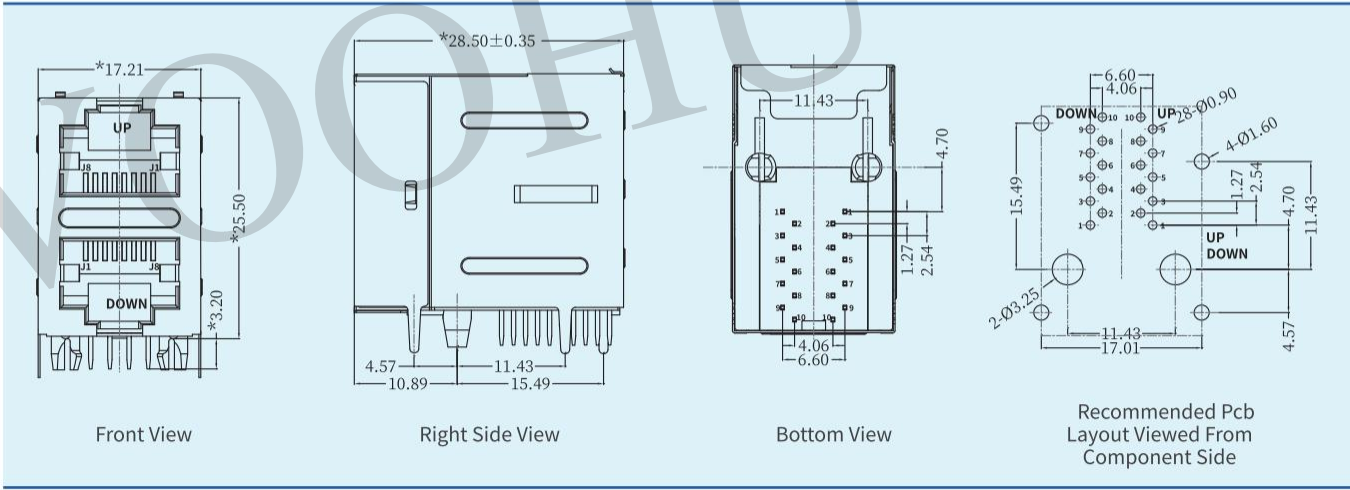

产品料号P/N:SYT21****HWA2D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

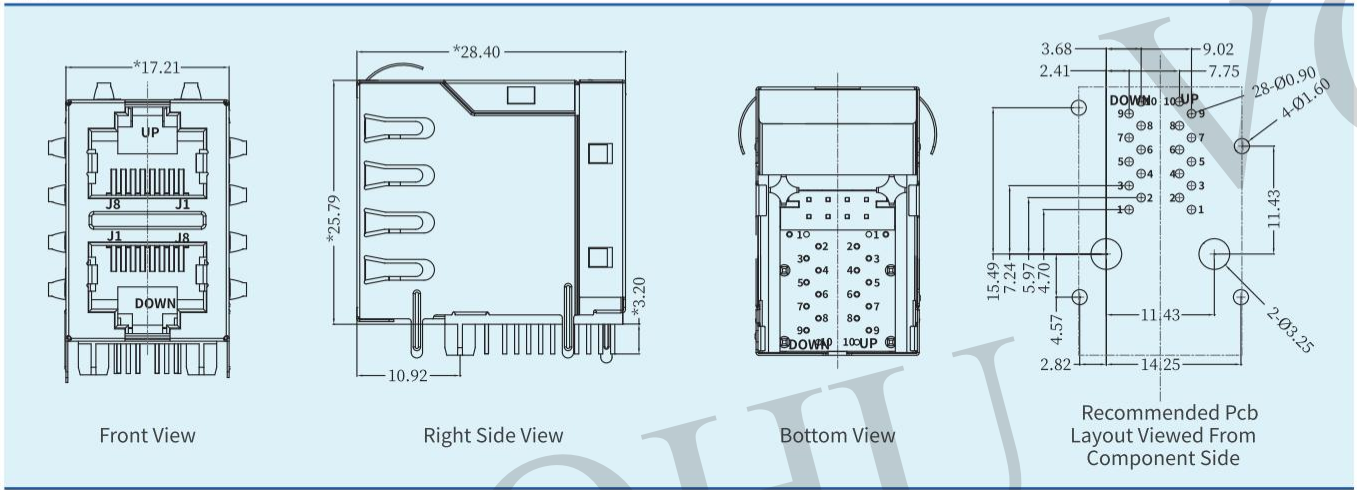

产品料号P/N:SYT21****HWA4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

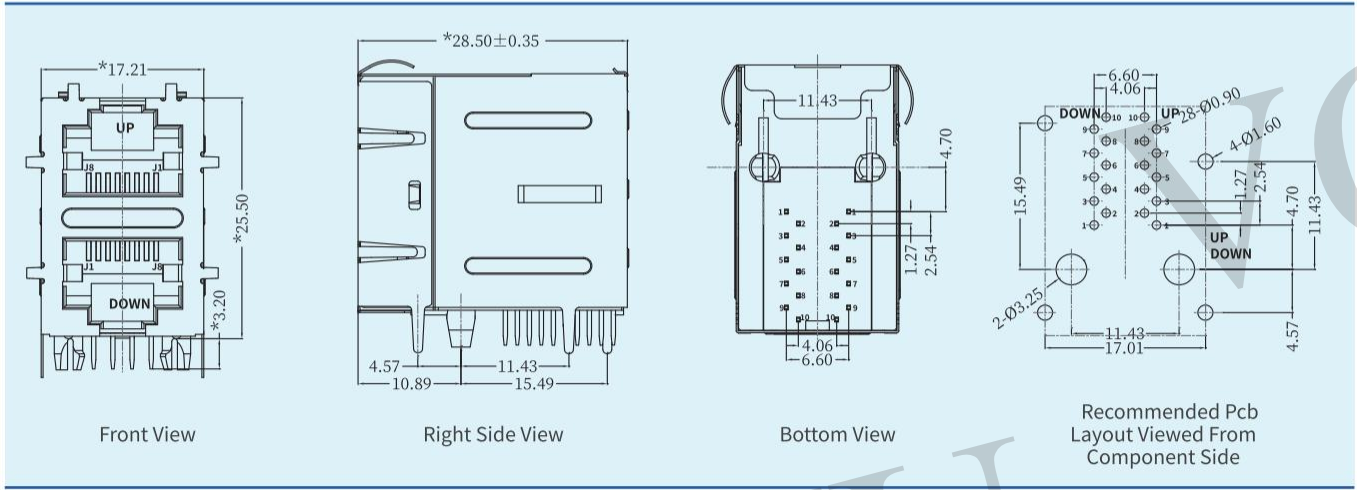

RJ45 2*N DIP 内置 10/100/1000M Base-T变压器系列 | RJ45 2*1 DIP with 10/100/1000M Base-T transformer series

RJ45 2*N DIP 内置 10/100/1000M Base-T变压器系列 | RJ45 2*1 DIP with 10/100/1000M Base-T transformer series



产品料号P/N:SYT21****AB2A2D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

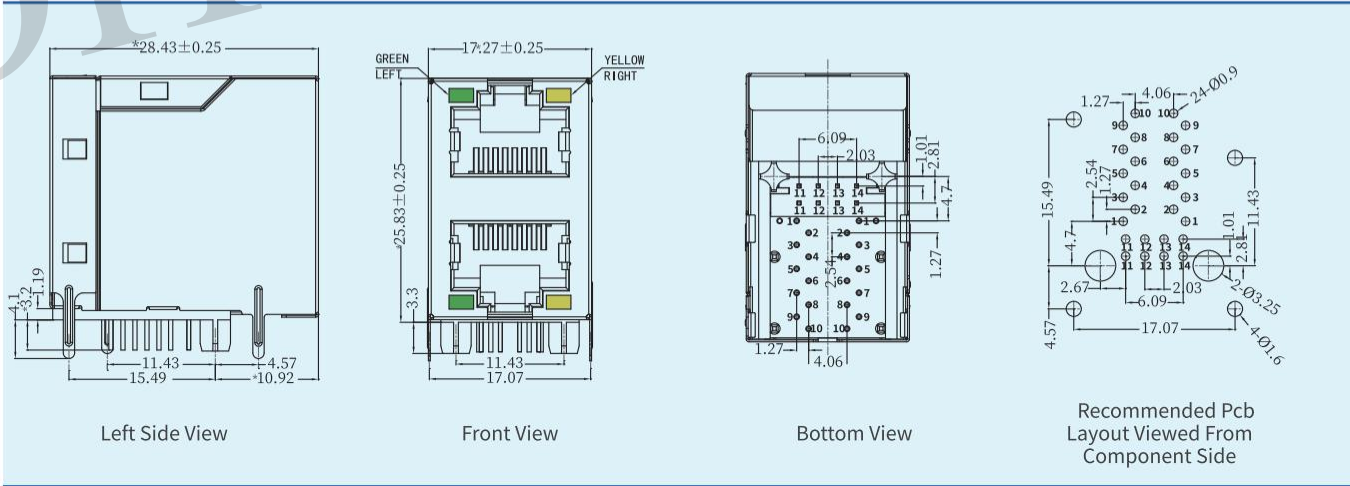

产品料号P/N:SYT21****DA1A2D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Yellow / R-Green


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

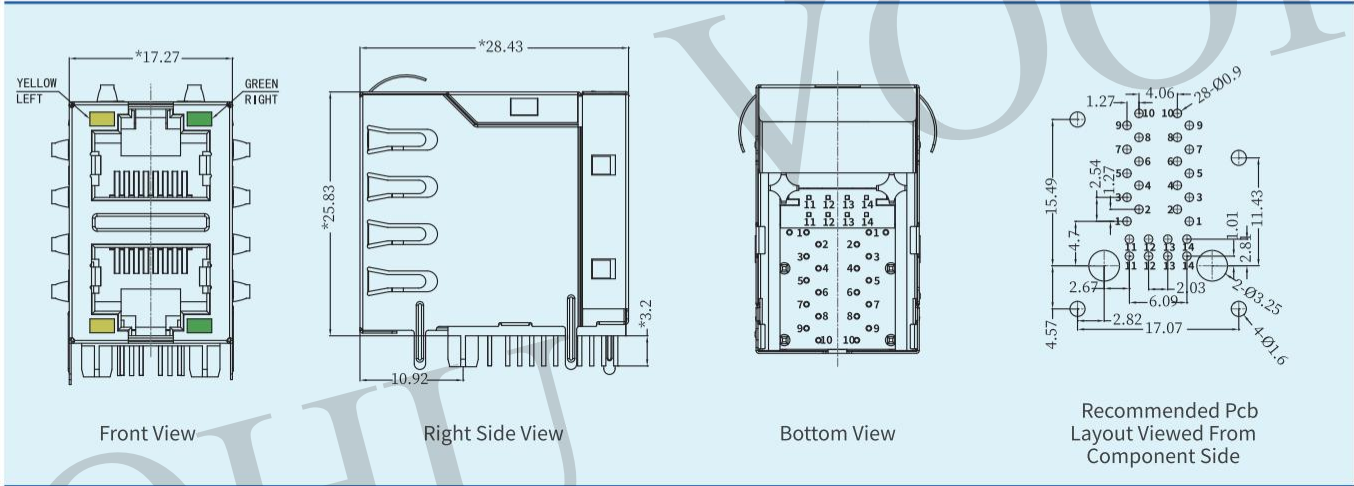

产品料号P/N:SYT21****AB2A4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

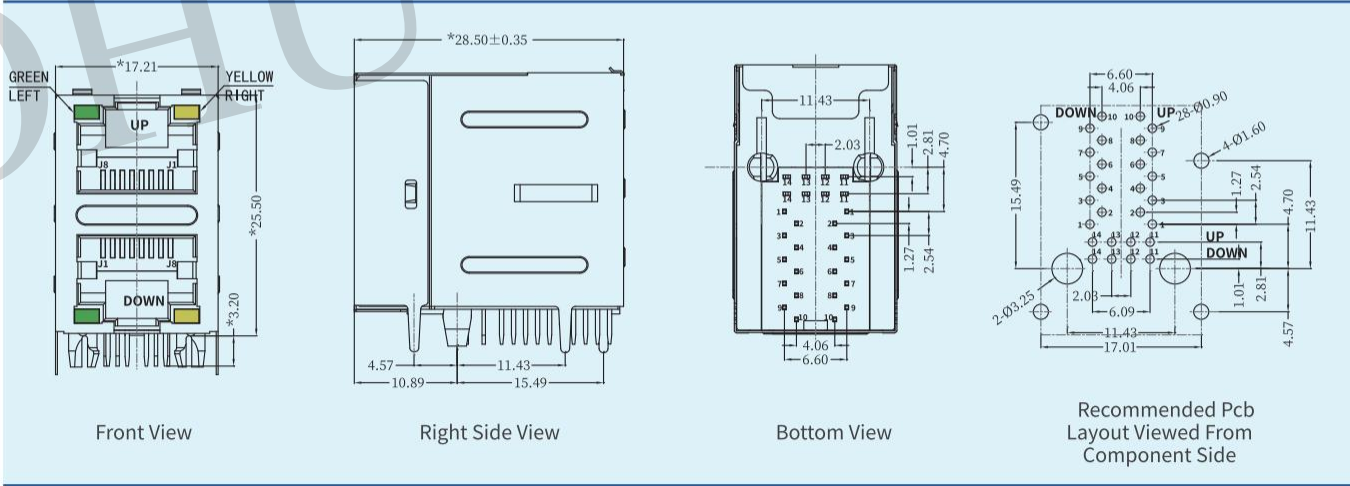

产品料号P/N:SYT21****DB2A4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

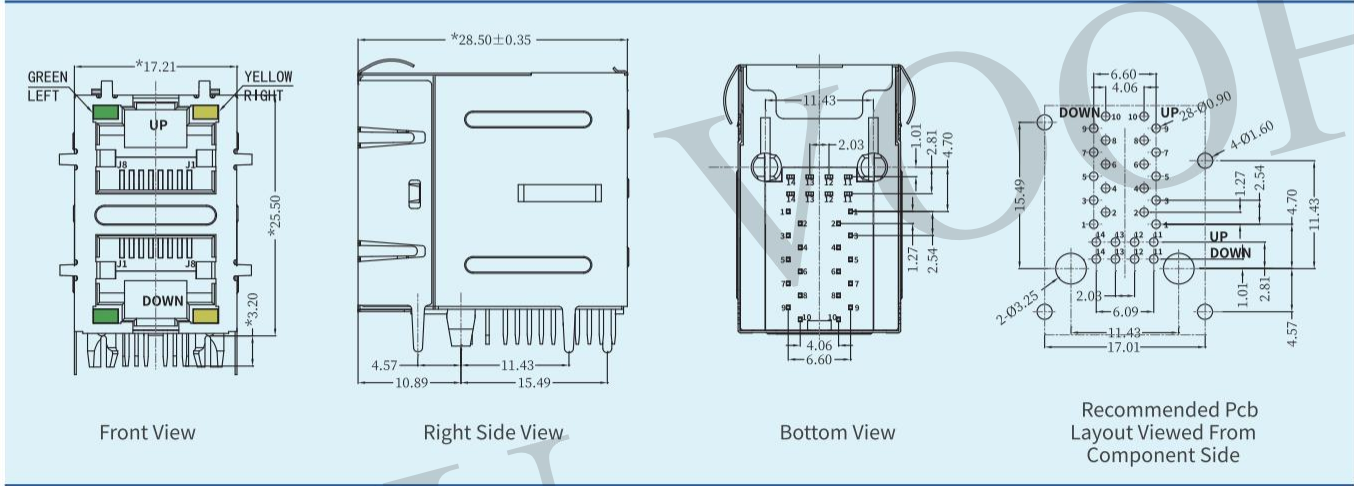


RJ45 2*N DIP 内置 10/100/1000M Base-T变压器系列 | RJ45 2*2 DIP with 10/100/1000M Base-T transformer series

RJ45 2*N DIP 内置 10/100/1000M Base-T变压器系列 | RJ45 2*2 DIP with 10/100/1000M Base-T transformer series




产品料号P/N:SYT22****GWA2D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch:
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: No
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

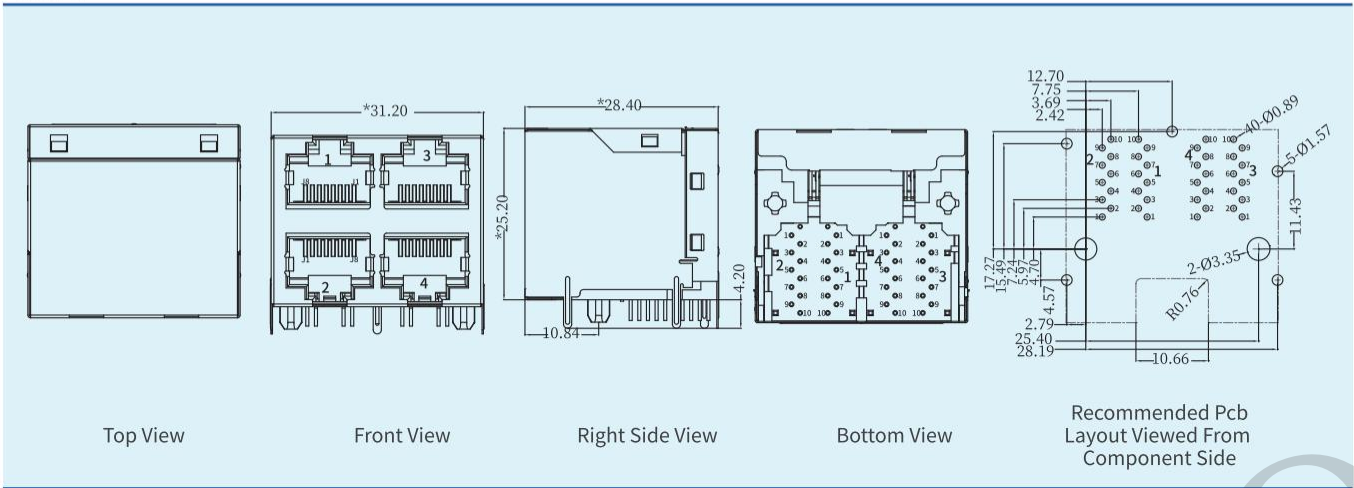


产品料号P/N:SYT22****HWA4D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch:
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: No
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

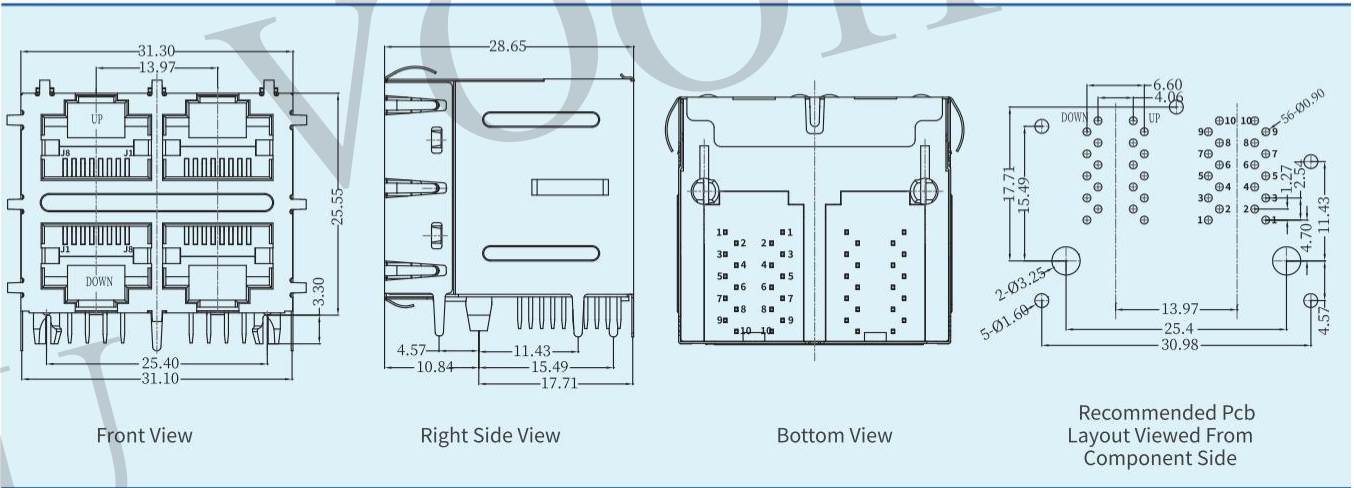


产品料号P/N:SYT22****HWA2D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch:
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: No
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

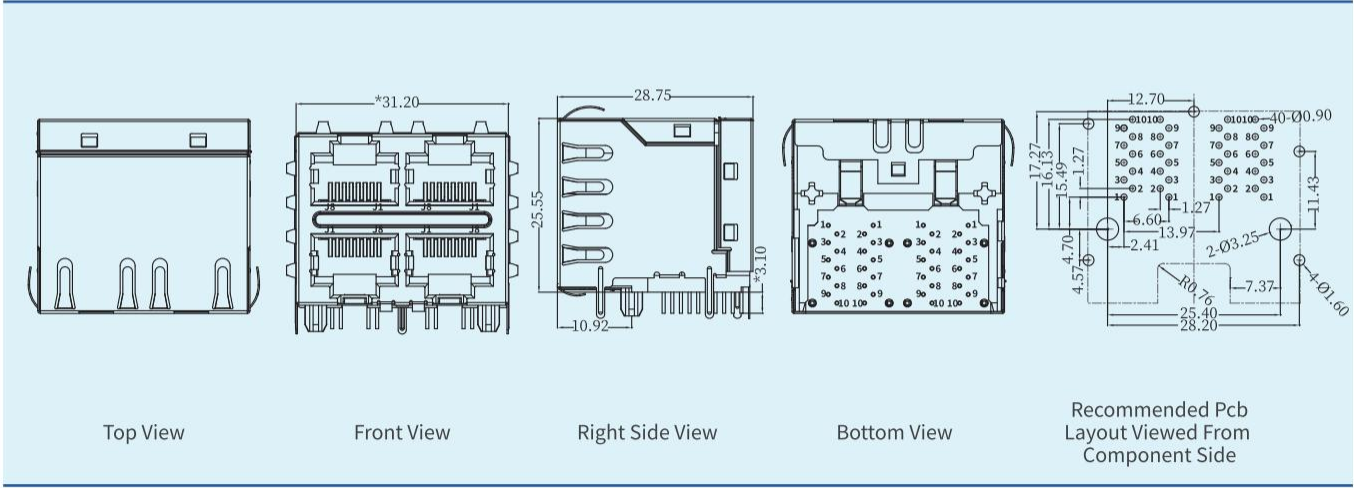

产品料号P/N:SYT22****AB2A2D (****: see transformer code)
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch:
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

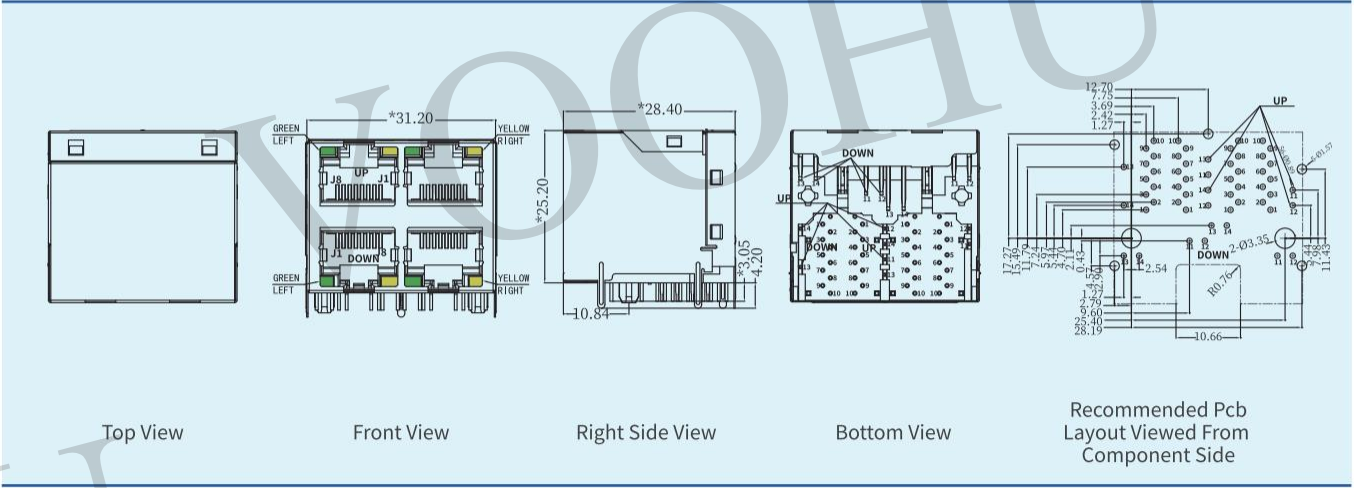

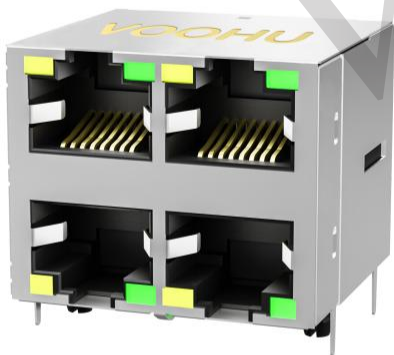

产品料号P/N:SYT22****AB1A4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Yellow / R-Green


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

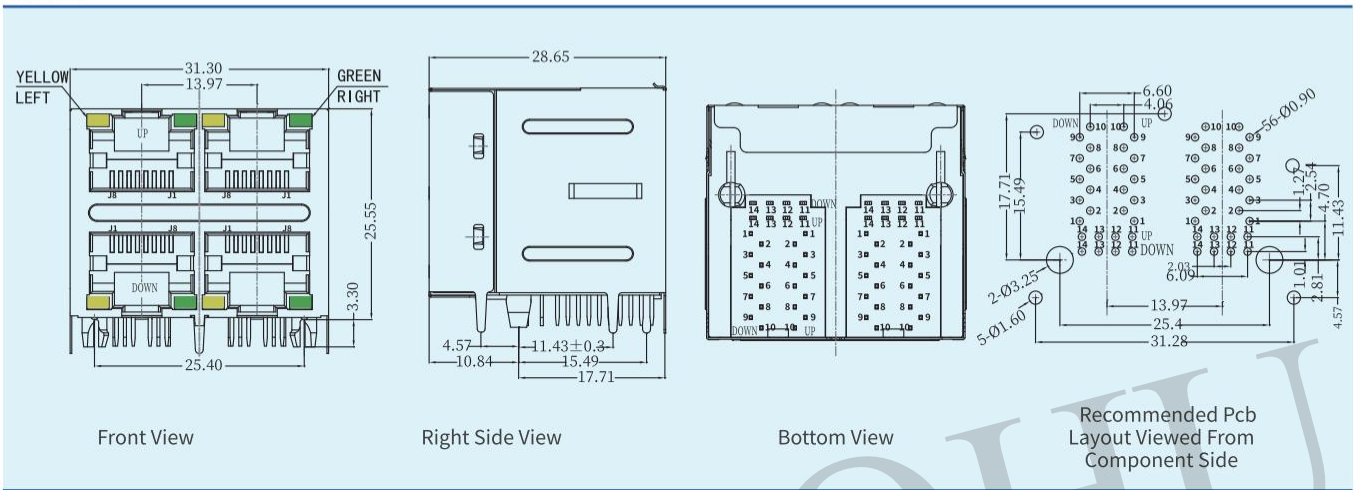

产品料号P/N:SYT22****DB2A2DB (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow



接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

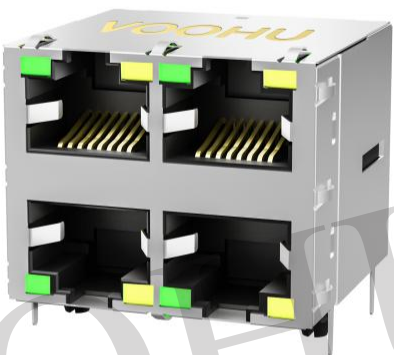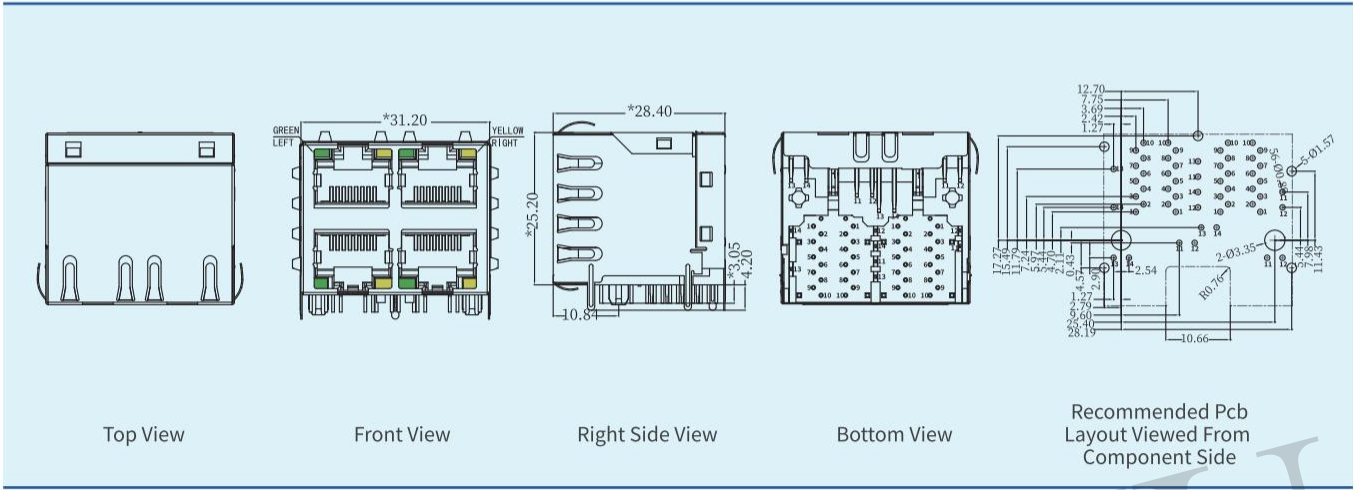

产品料号P/N:SYT22****DB2A4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

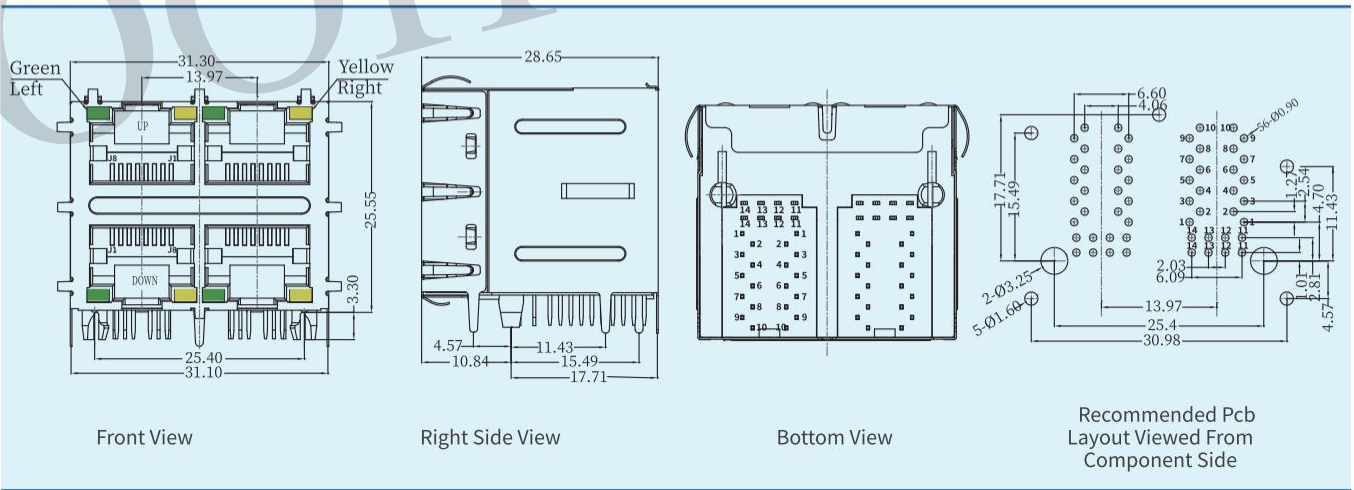

产品料号P/N:SYT24****GWA4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

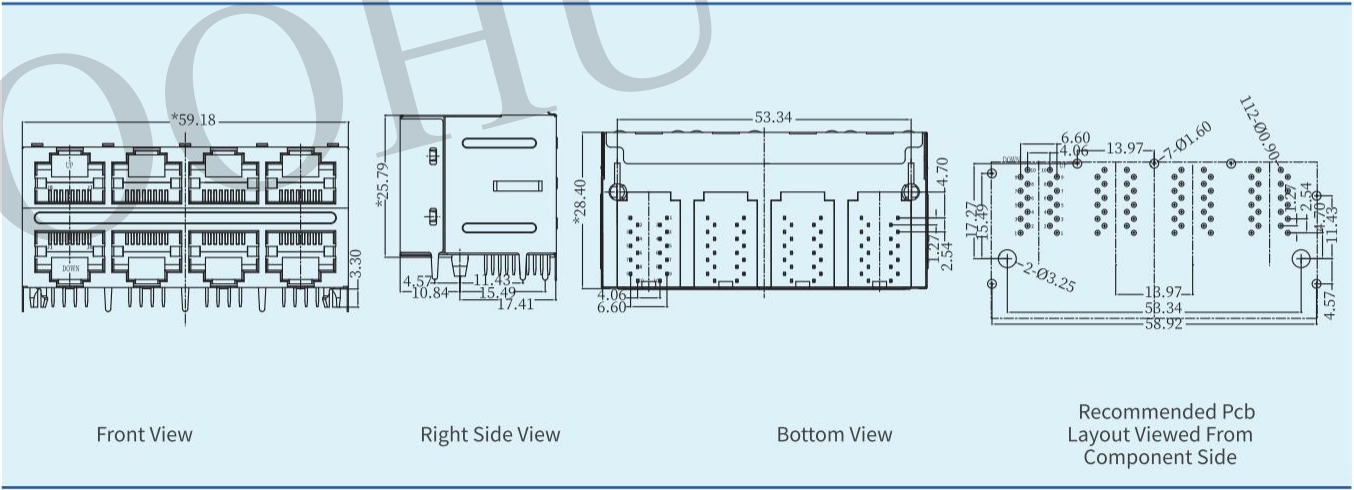



产品料号P/N:SYT24****HWA1D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz, 0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional


适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:




Top View





Right Side View



Front View



Bottom View

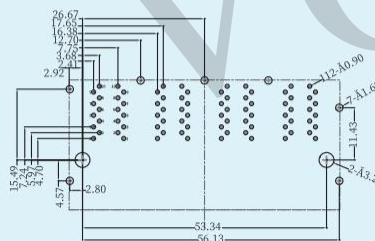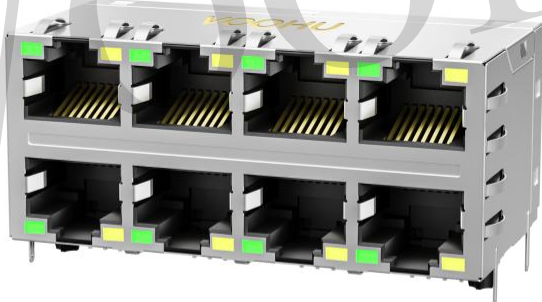Recommended Pcb
Layout Viewed From
Component Side

产品料号P/N:SYT24****DB2A2D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz, 0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional


适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

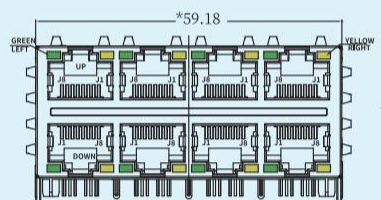



Front View



Right Side View



Bottom View

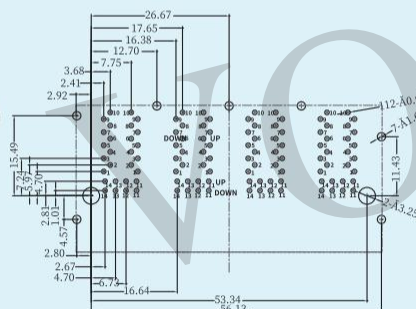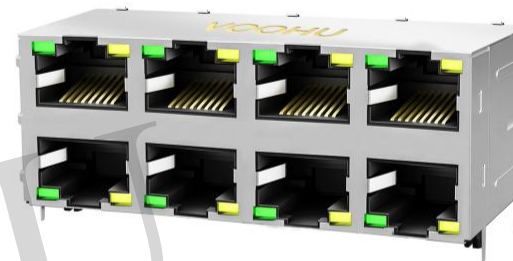Recommended Pcb
Layout Viewed From
Component Side

产品料号P/N:SYT24****AB2A4D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz, 0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional


适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

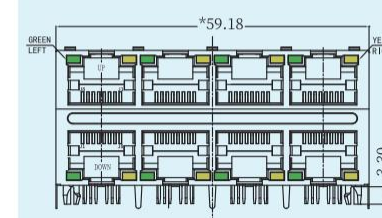


Front View



Right Side View



Bottom View

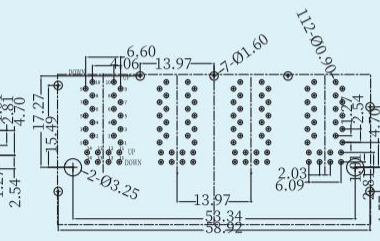Recommended Pcb
Layout Viewed From
Component Side

产品料号P/N:SYT24****DB2A10DP (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz, 0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional


适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:




Top View




Front View



Right Side View



Bottom View

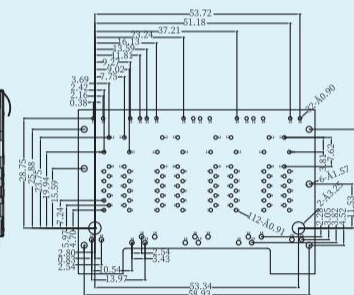Recommended Pcb
Layout Viewed From
Component Side



产品料号P/N:SYT26****HWA2D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz, 0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

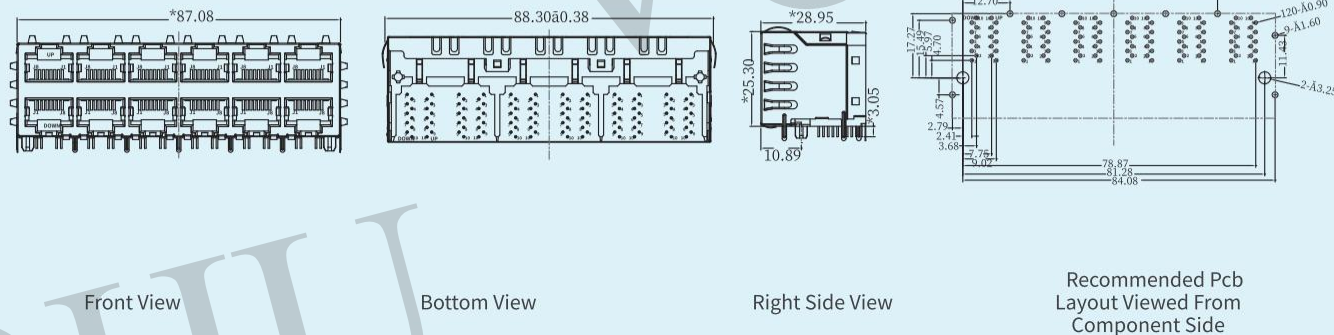

产品料号P/N:SYT26****DB2A2D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz, 0.1V.


是否带灯With LED: Yes, L-Green / R-Yellow

接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

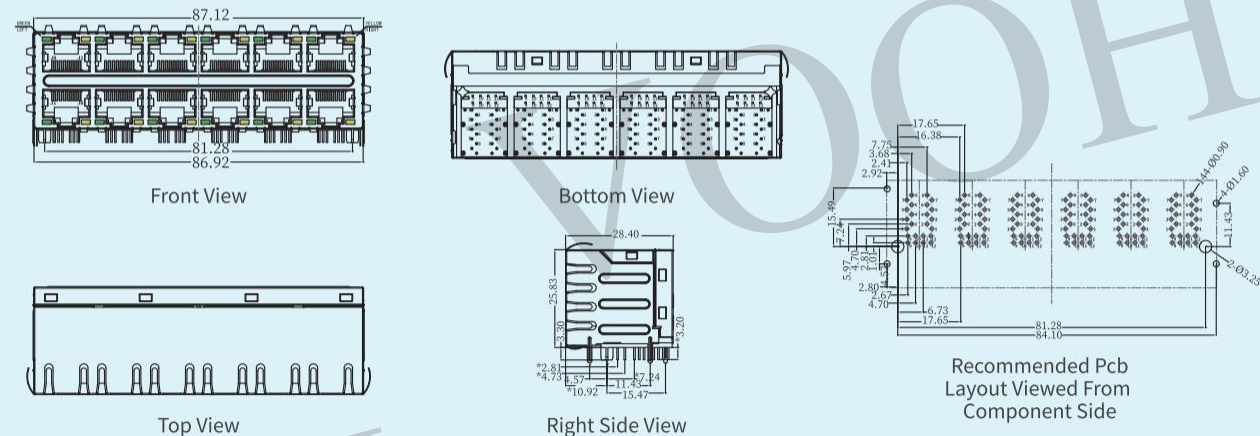

产品料号P/N:SYT26****DB2A5DP (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz, 0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

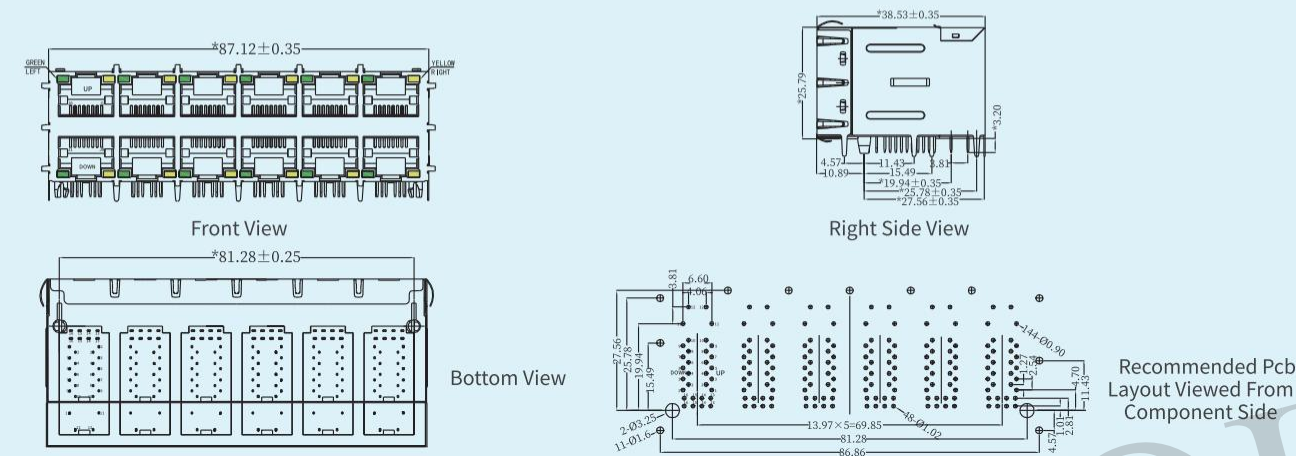

产品料号P/N:SYT28****DB2A1D (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz, 0.1V.

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional













适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL













结构图:

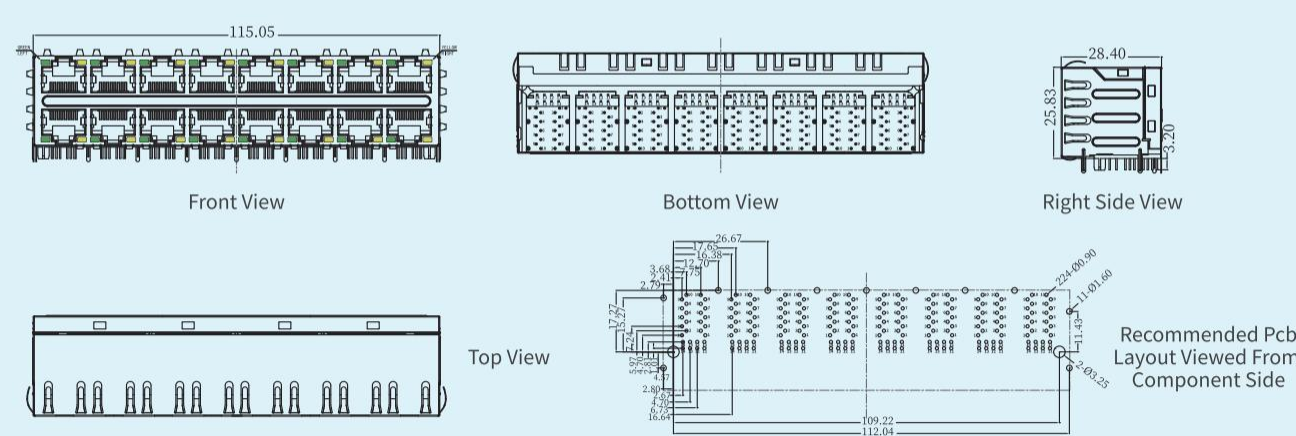













线路图 Q002-Q070

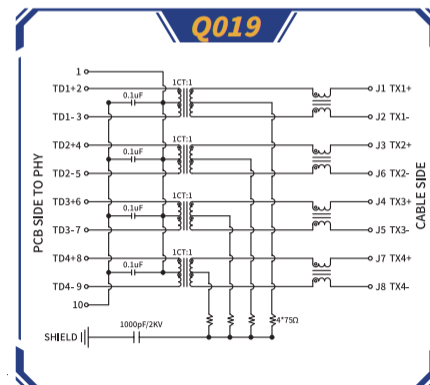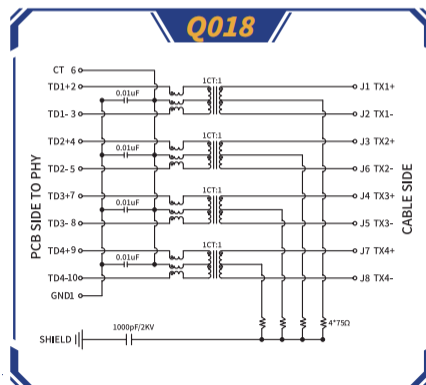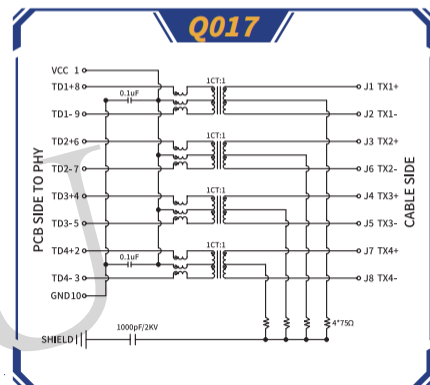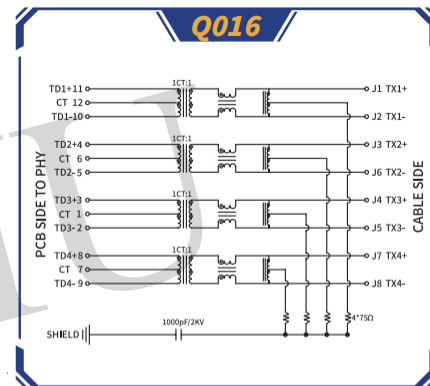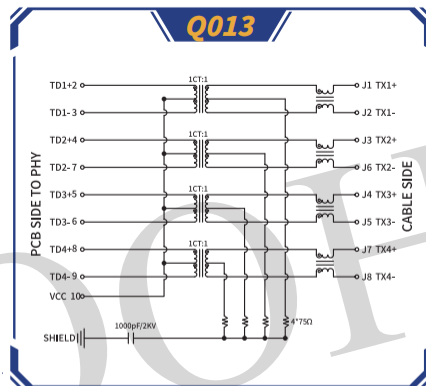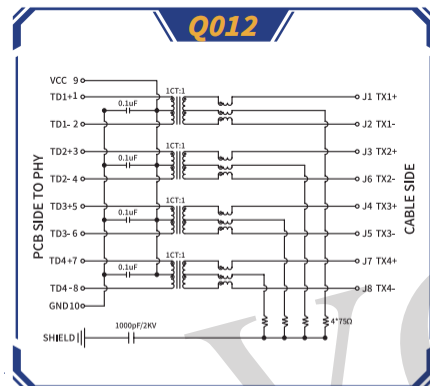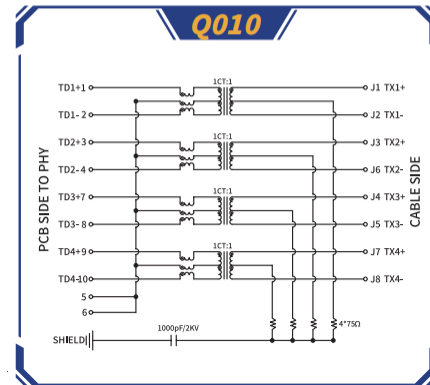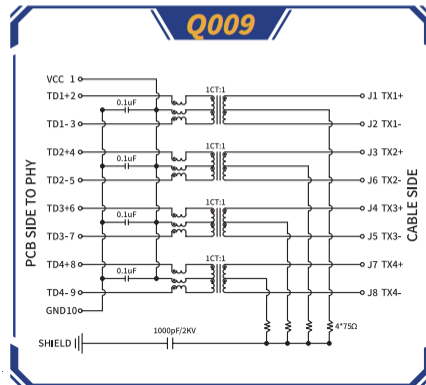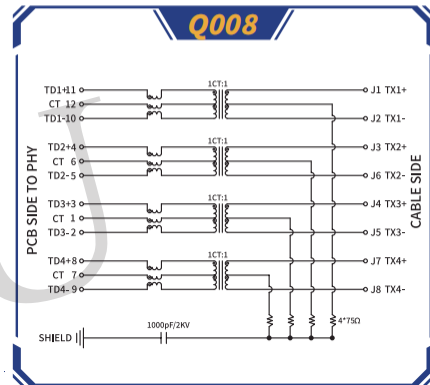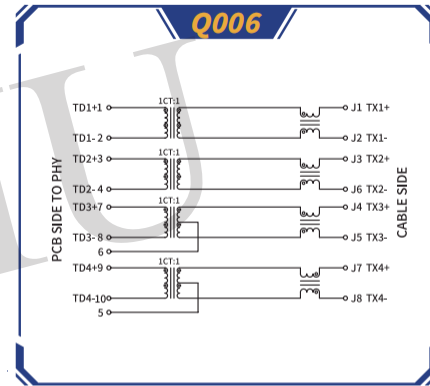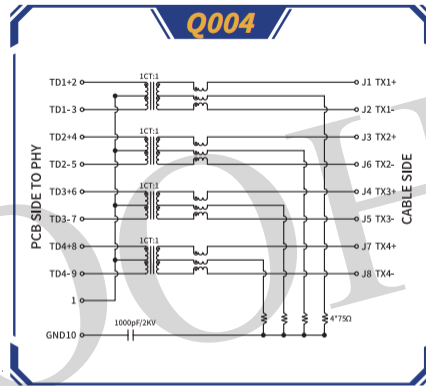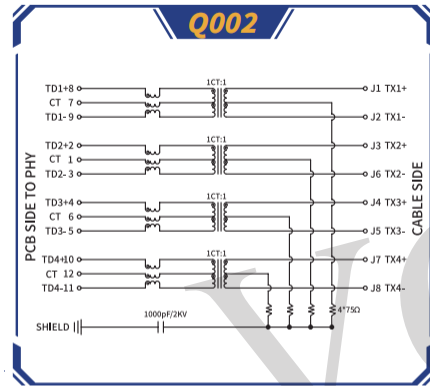













线路图 Q028-Q068

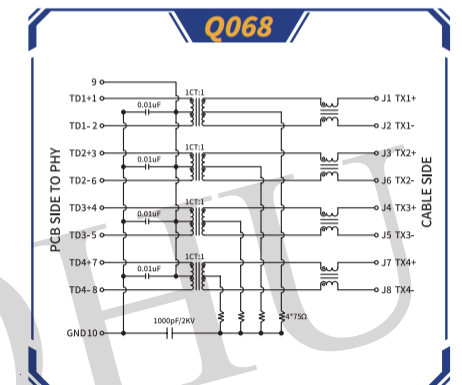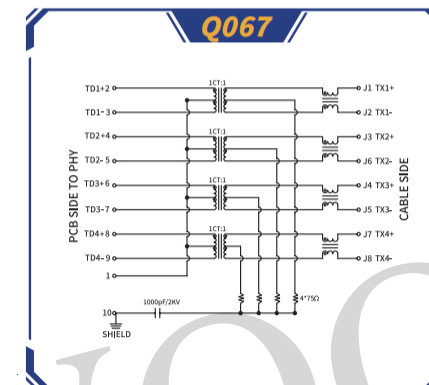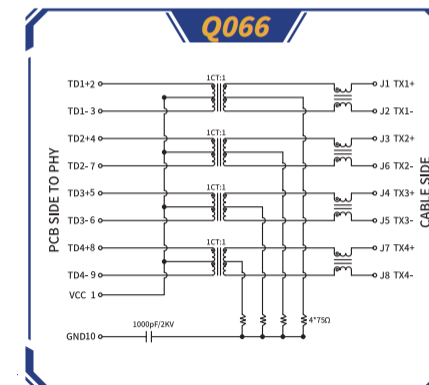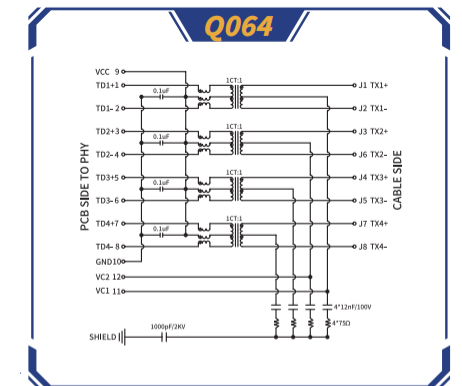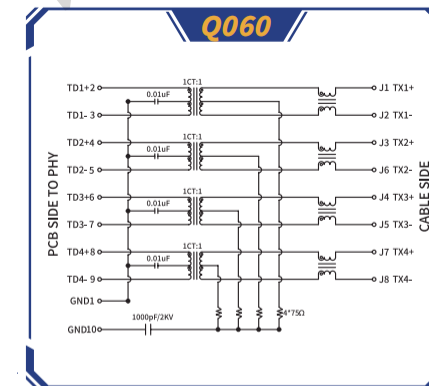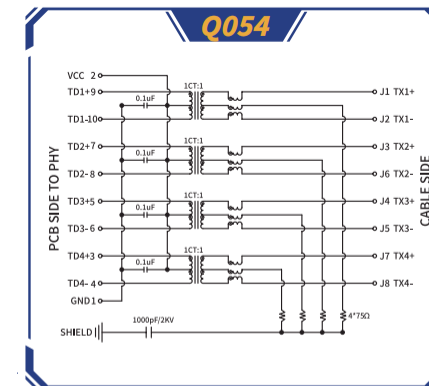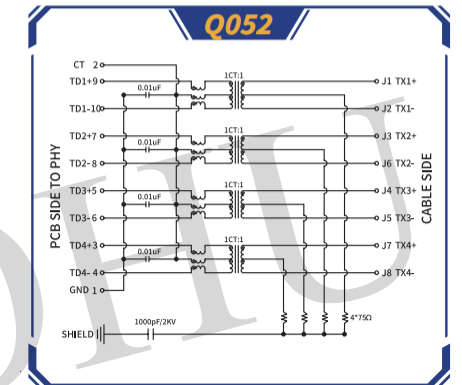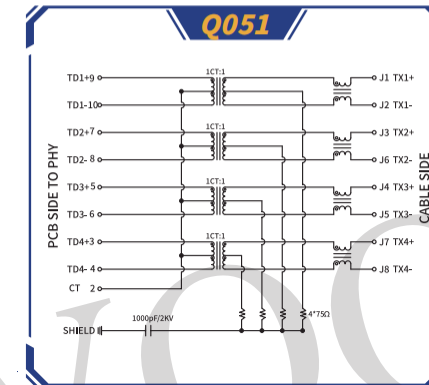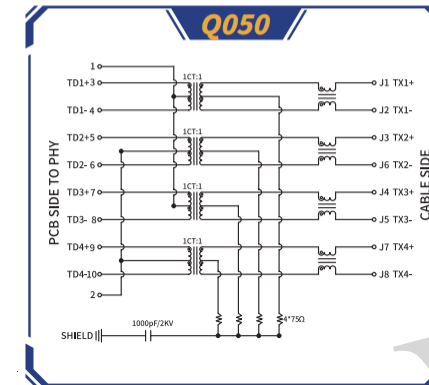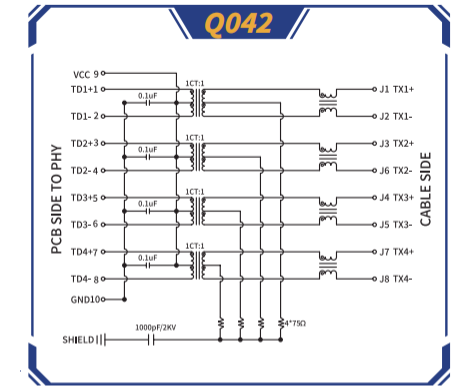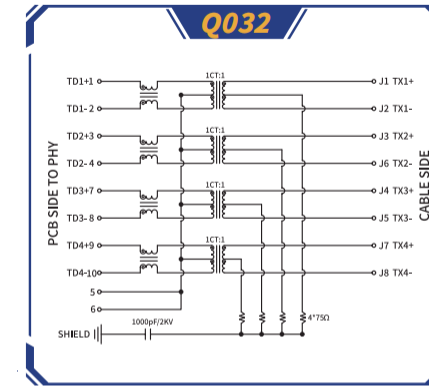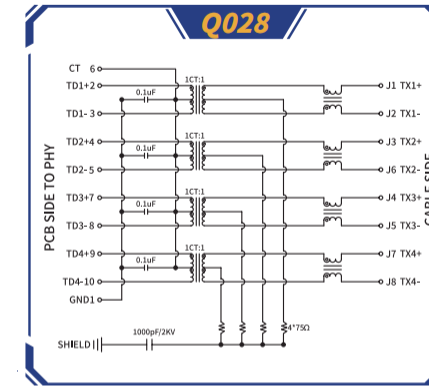













线路图 Q070-Q106

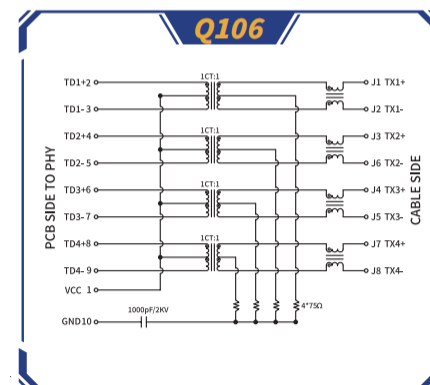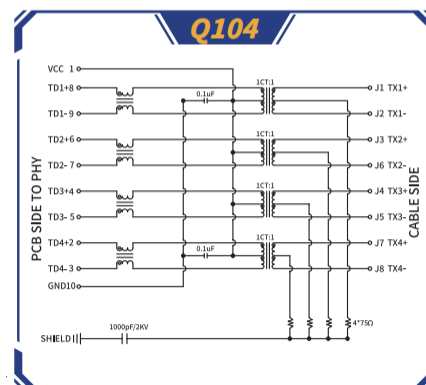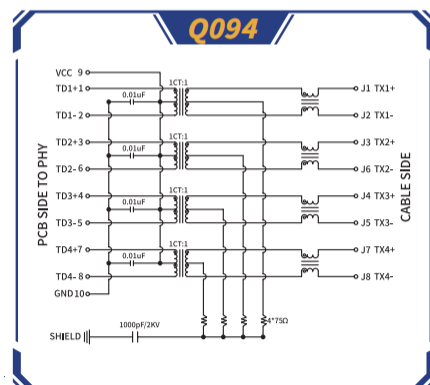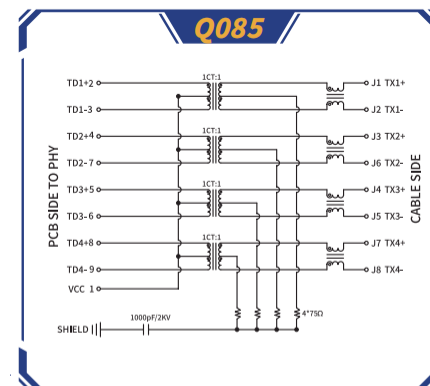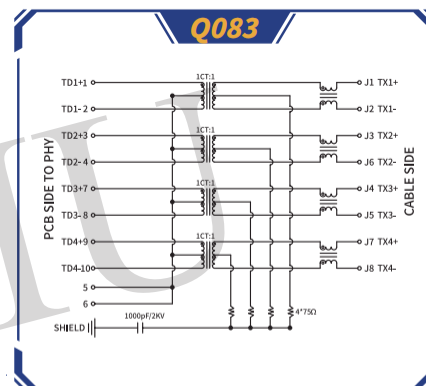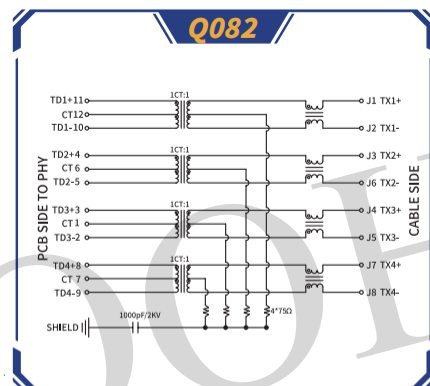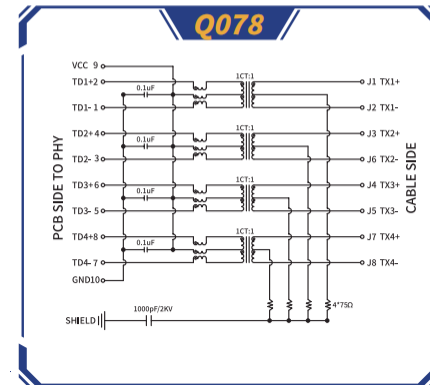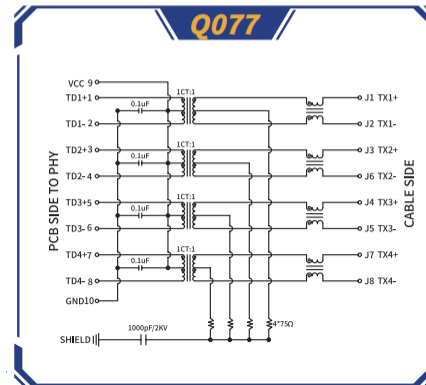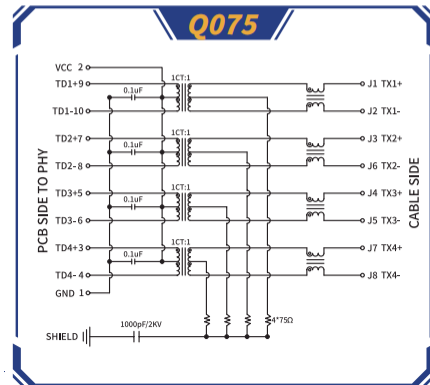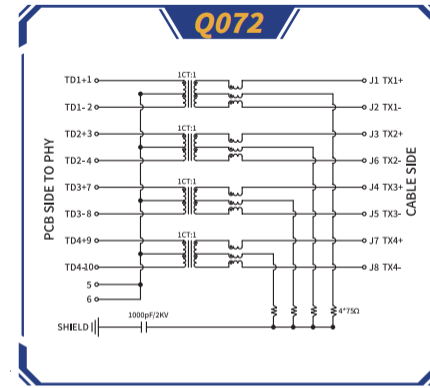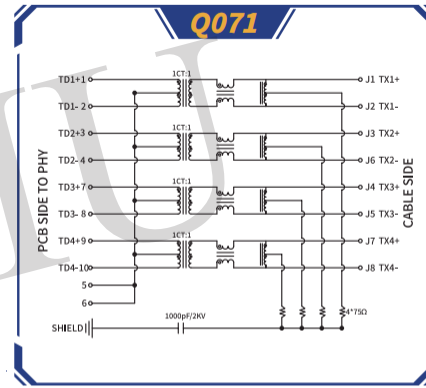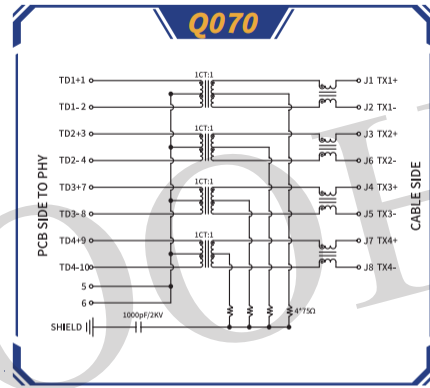













线路图 Q108-Q250

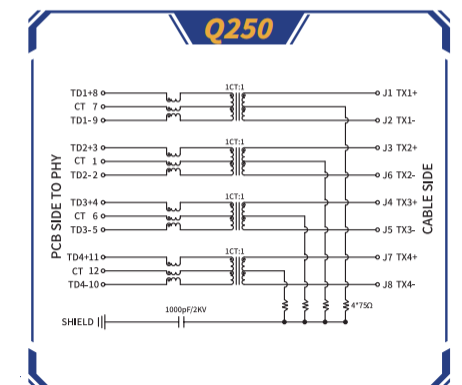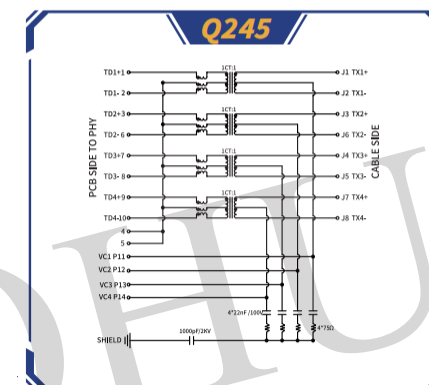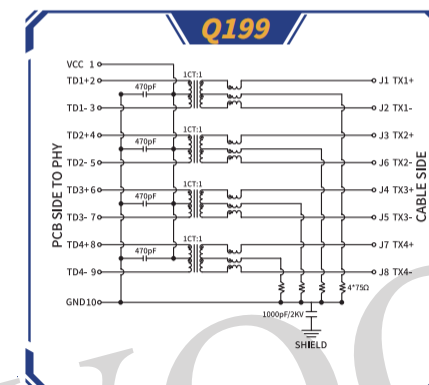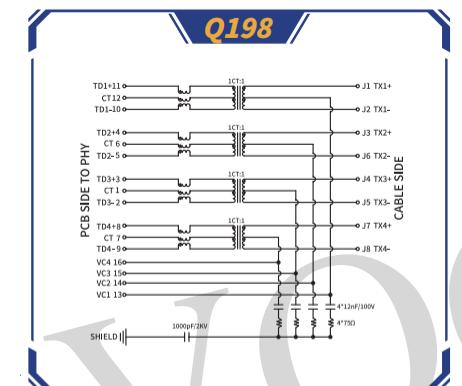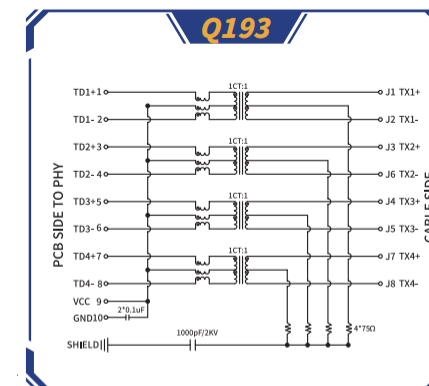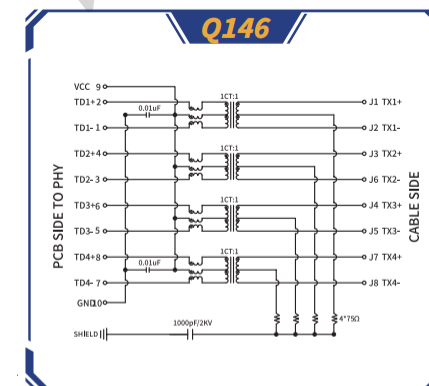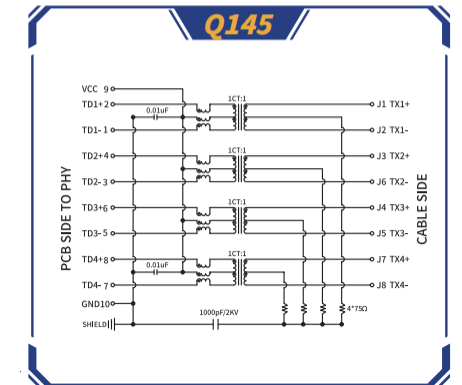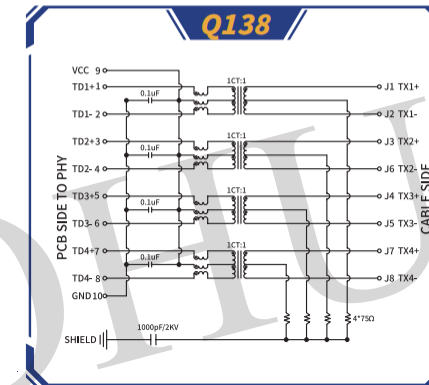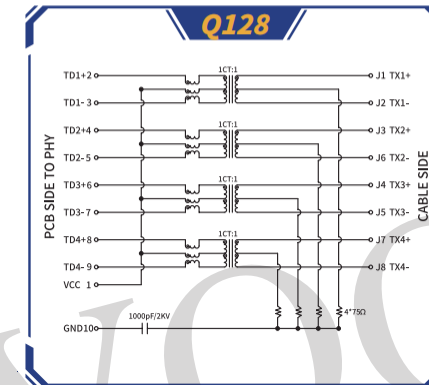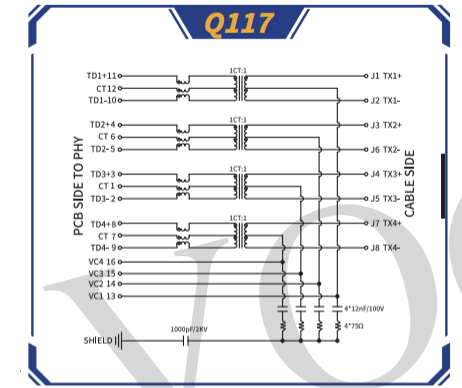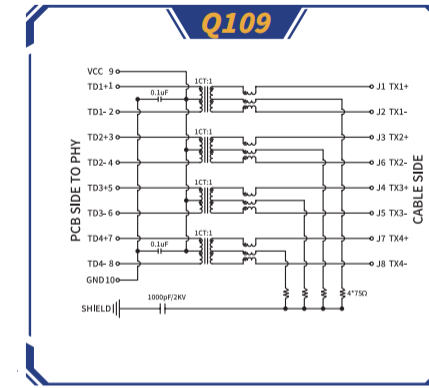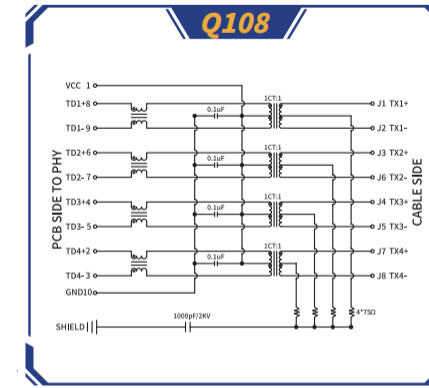

线路图 Q254-Q318

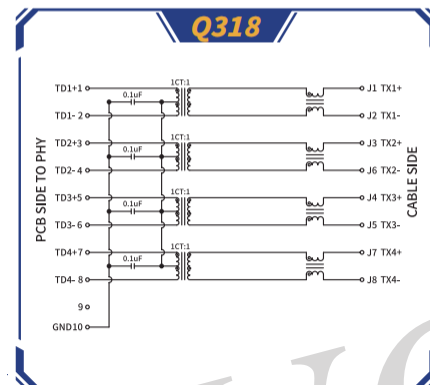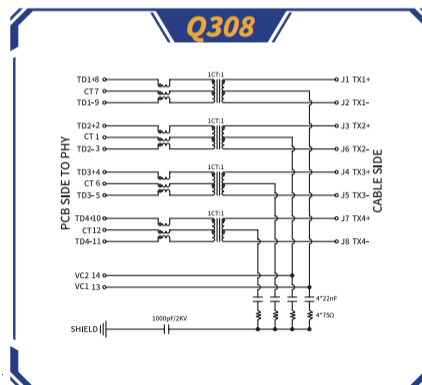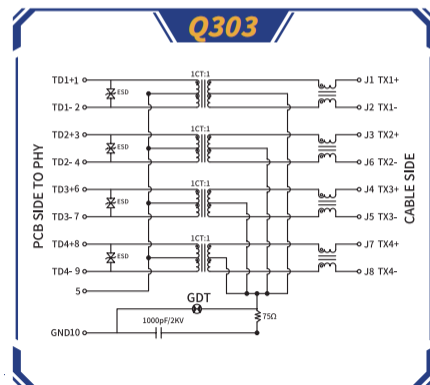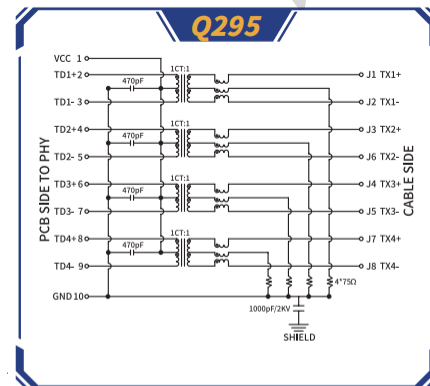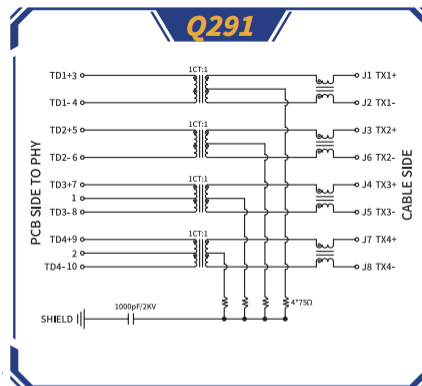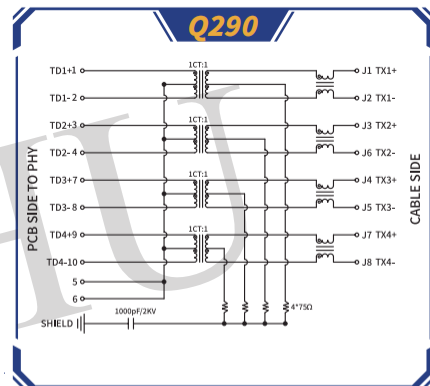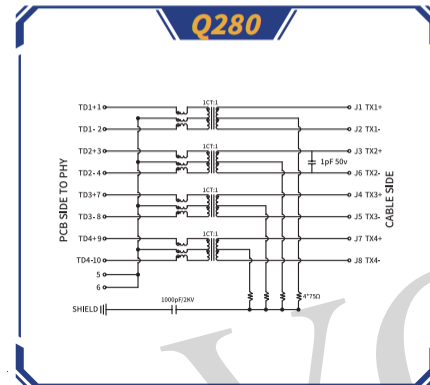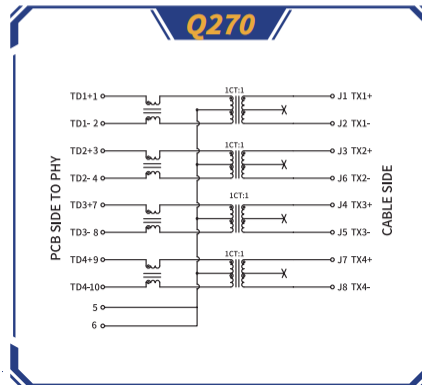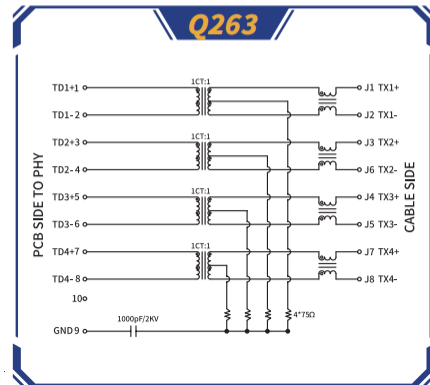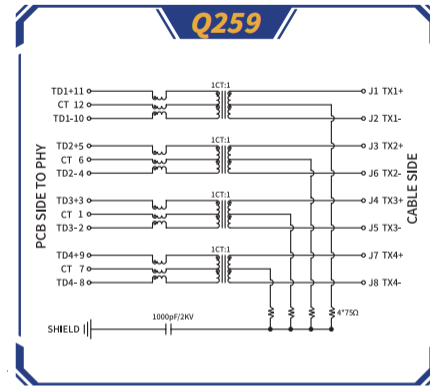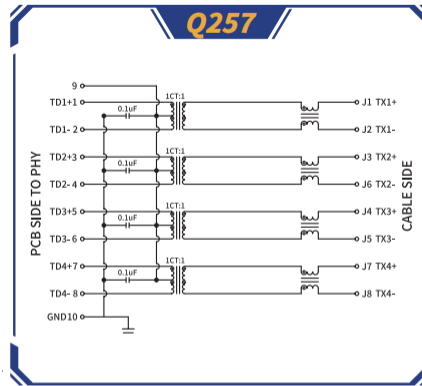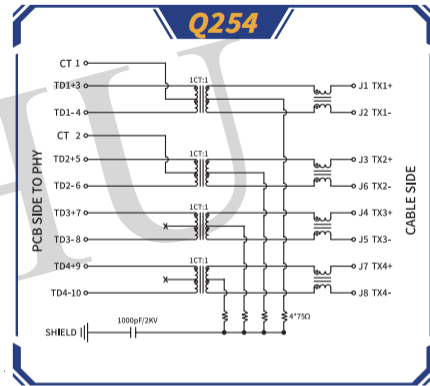

线路图 Q319-Q390

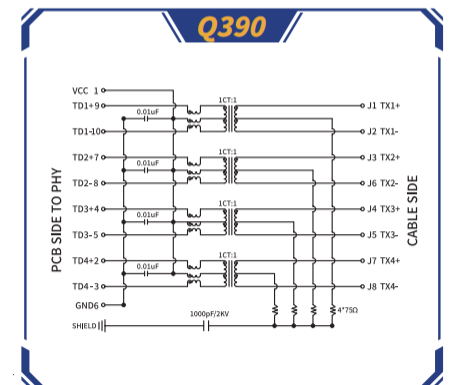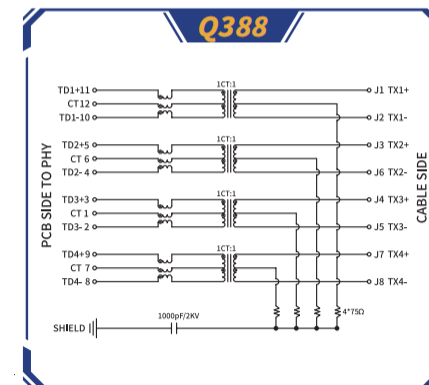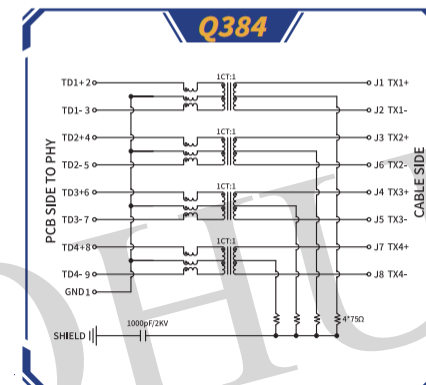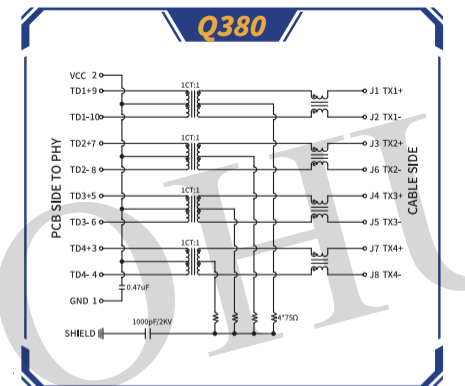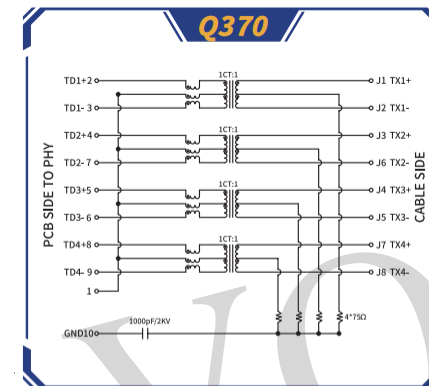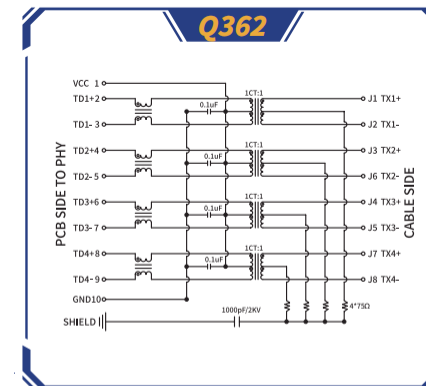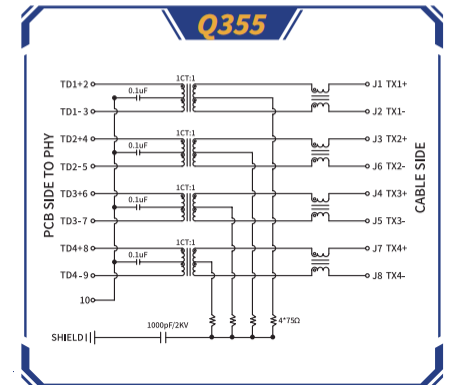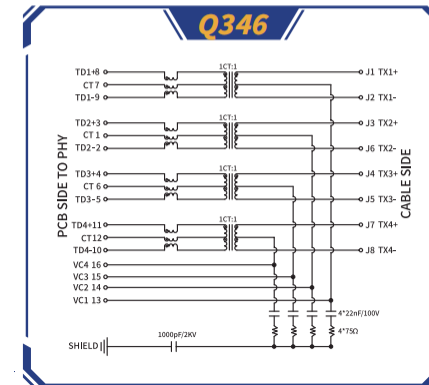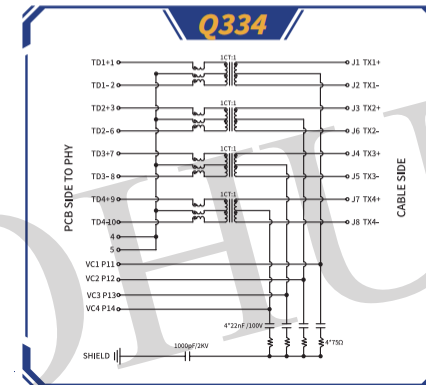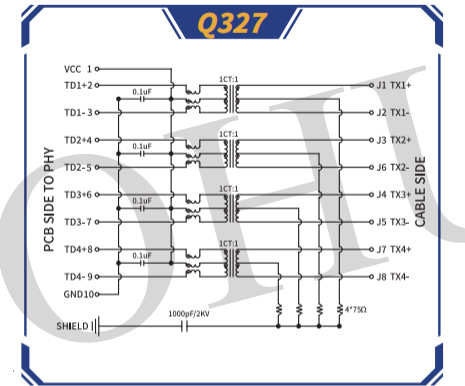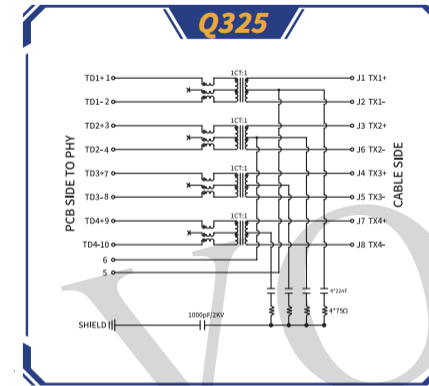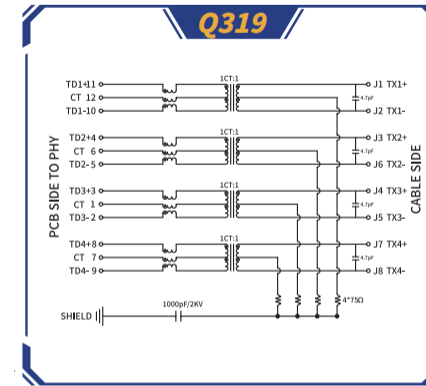



产品料号P/N:SYT511****GWA8DA2(2.5G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab up

适用传输速率Speed: 2.5G Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 180uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

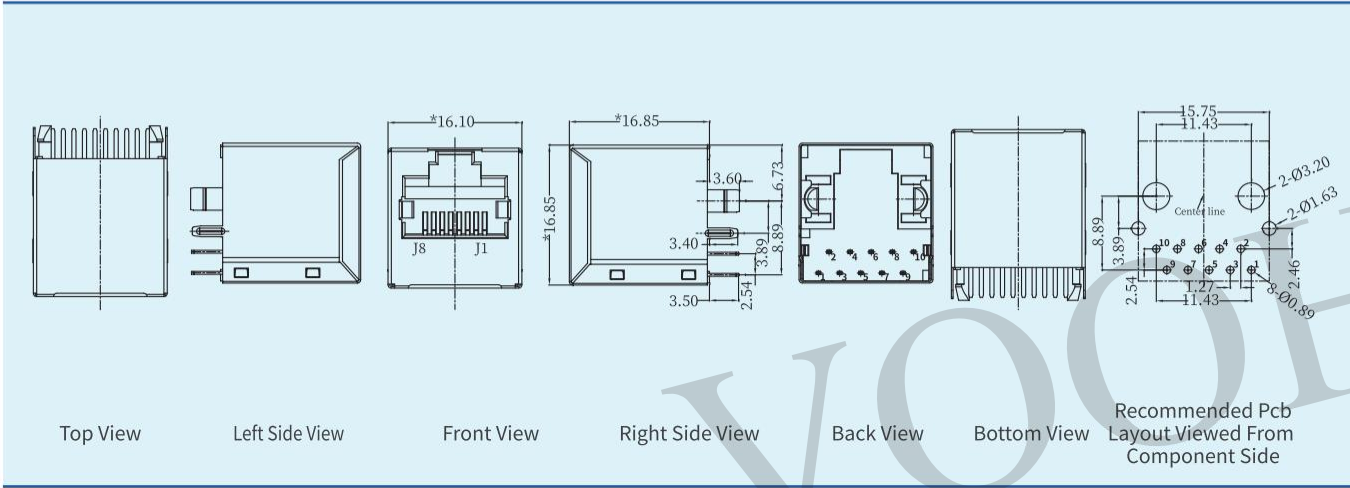

产品料号P/N:SYT511****AB2A8DA2(2.5G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab up

适用传输速率Speed: 2.5G Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 180uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow



接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

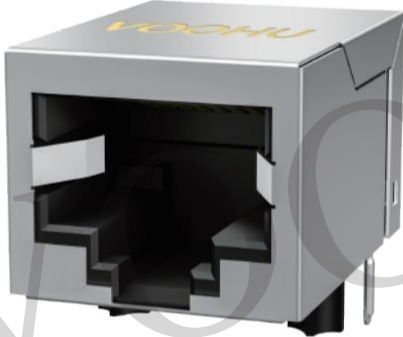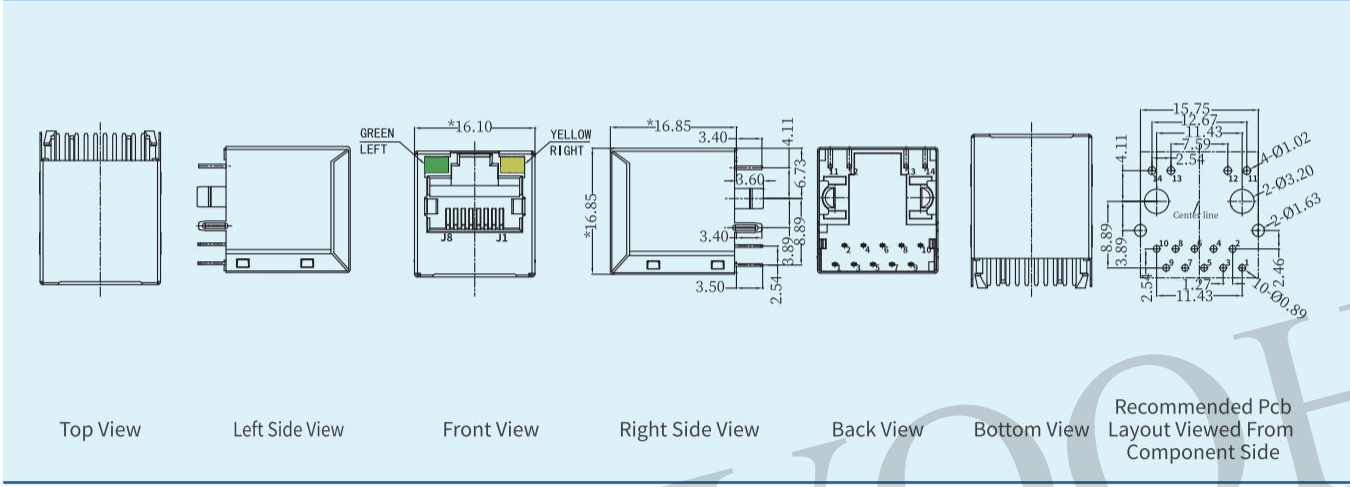

产品料号P/N:SYT111****GWA1DA2(2.5G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 2.5G Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 180uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

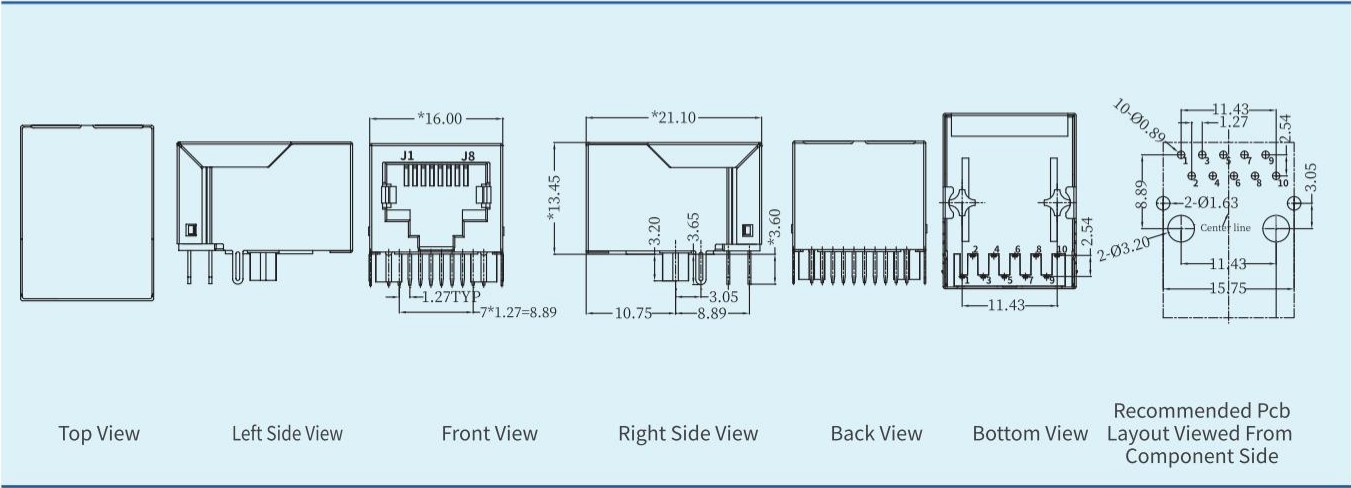

产品料号P/N:SYT111****HWA1DA2(2.5G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 2.5G Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 180uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

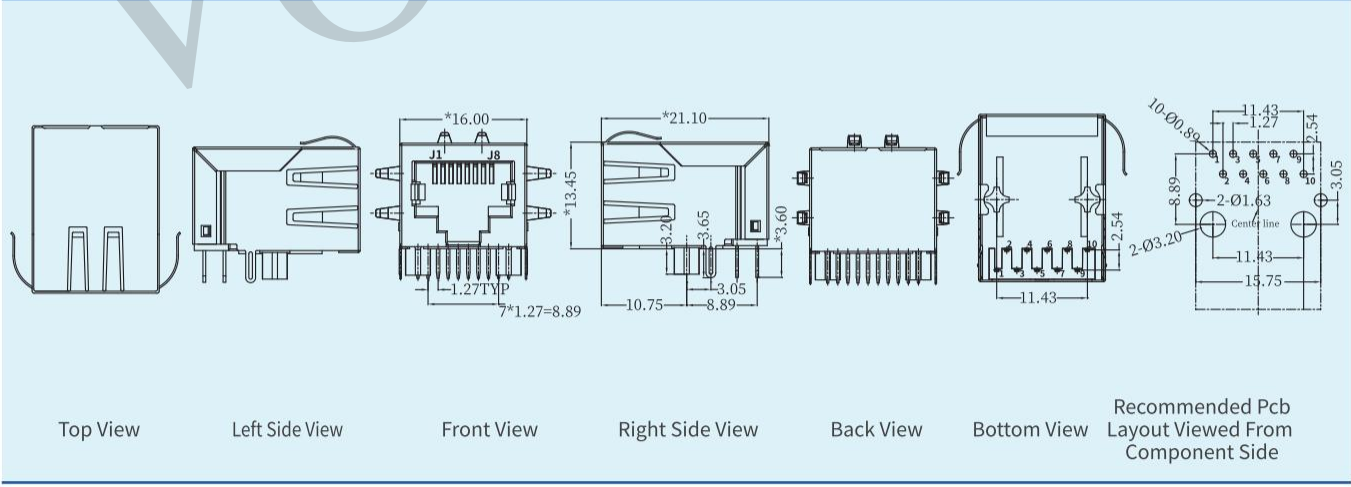


RJ45 内置 2.5G/5G/10G Base-T变压器系列 | RJ45 with 2.5G/5G/10G Base-T transformer

RJ45 内置 2.5G/5G/10G Base-T变压器系列 | RJ45 with 2.5G/5G/10G Base-T transformer

产品料号P/N:SYT111****AA2A1DA2(2.5G) (****: see transformer code)

产品规格Specifications:
类型 Type: RJ45 connector
卡口方向Latch: Tab Down
适用传输速率Speed: 2.5G Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 180uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

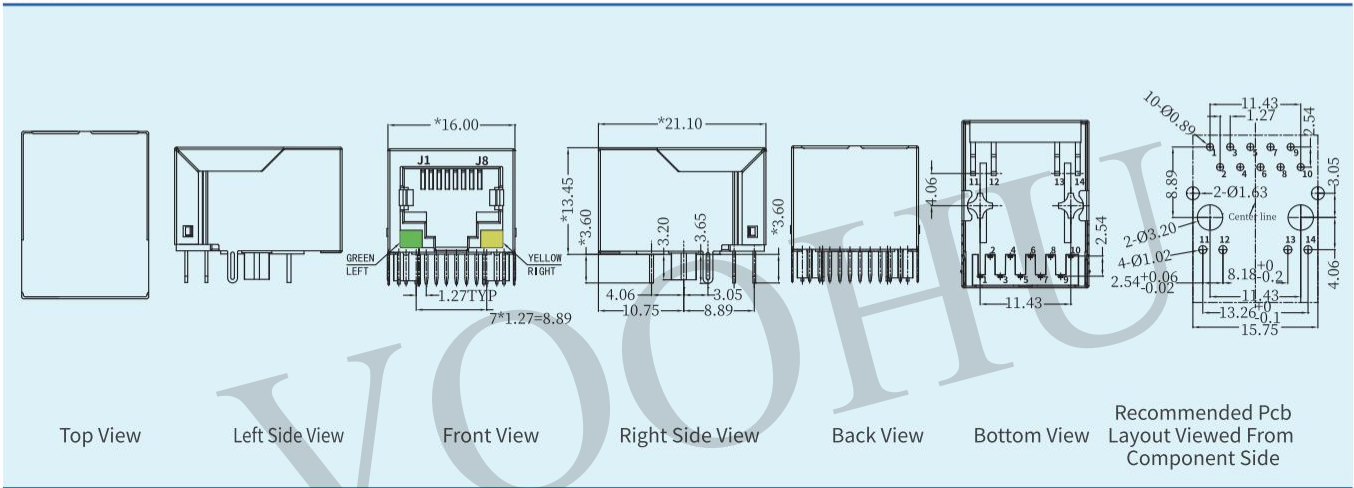

产品料号P/N:SYT111****DA2A1DA2(2.5G) (****: see transformer code)

产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
适用传输速率Speed: 2.5G Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 180uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

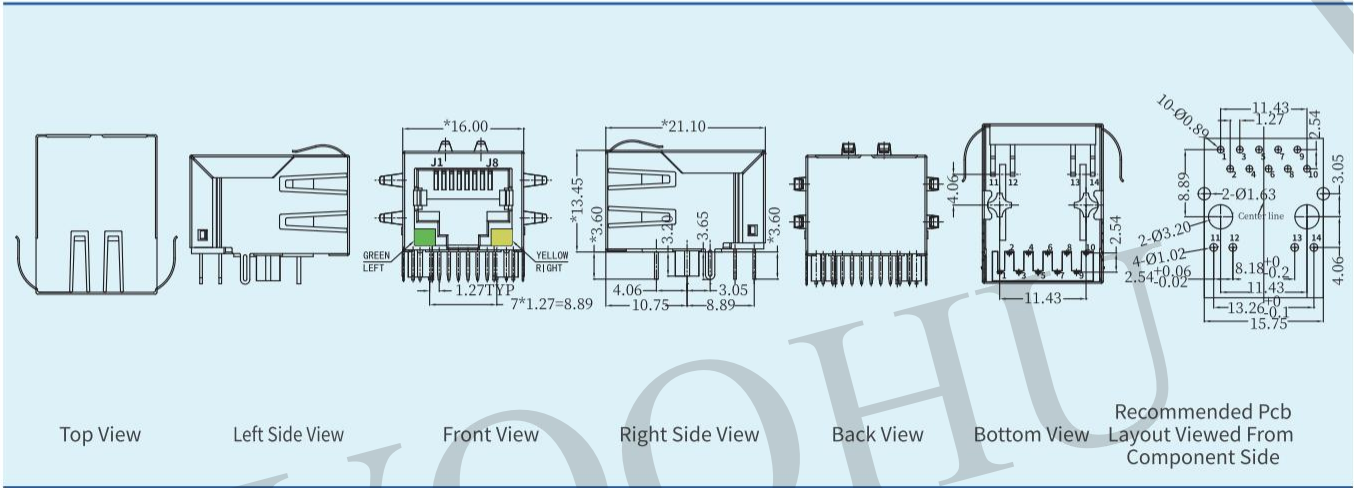

产品料号P/N:SYT211****CE3A4D2(2.5G) (****: see transformer code)

产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 2.5G Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 180uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Green / R-Green / Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

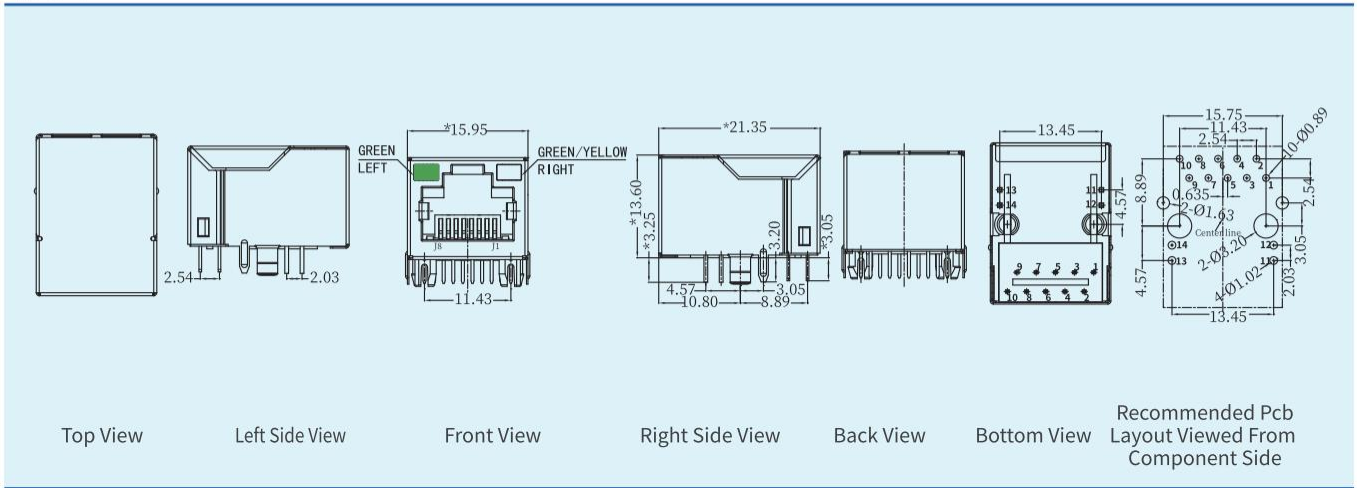

产品料号P/N:SYT211****FD2A4D2(2.5G) (****: see transformer code)

产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 2.5G Base-T
线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1
电感OCL: 180uH Minimum @100K Hz,0.1V
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

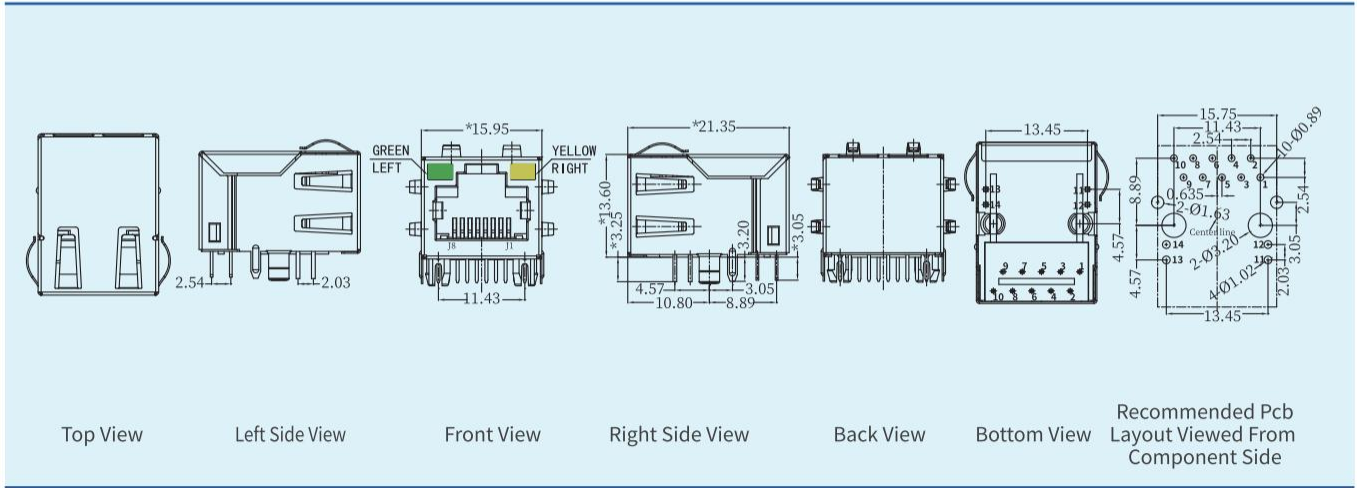




产品料号P/N:SYT411****AB2A1D2(2.5G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 2.5G Base-T
线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1
电感OCL: 180uH Minimum @100K Hz, 0.1V
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

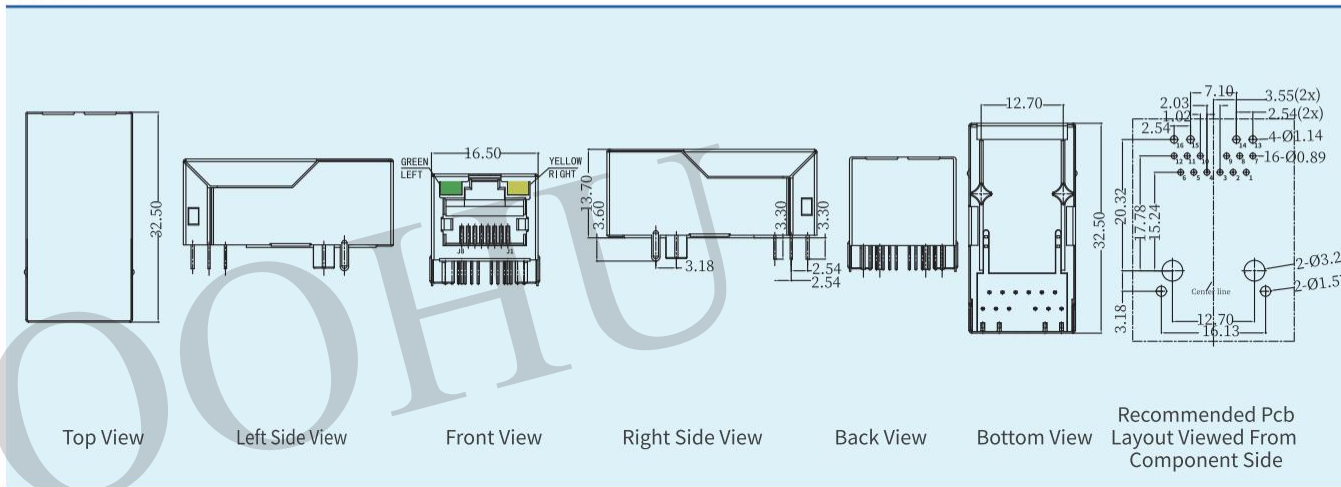


产品料号P/N:SYT112****HWA1DA2(2.5G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector
卡口方向Latch: Tab Down
适用传输速率Speed: 2.5G Base-T
线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1
电感OCL: 180uH Minimum @100K Hz, 0.1V
是否带灯With LED: No
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

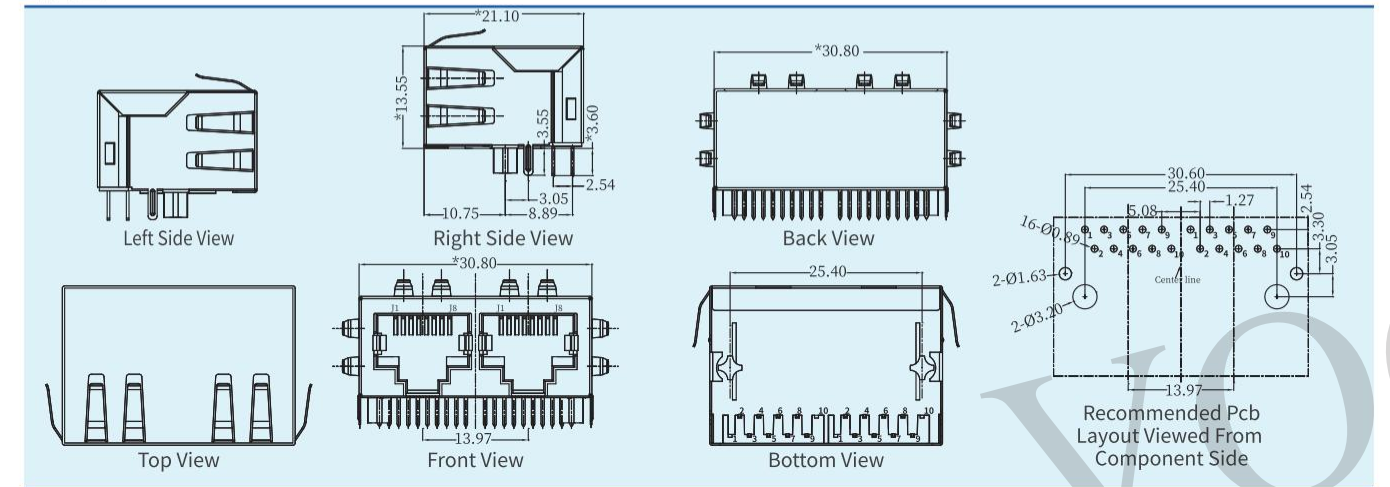


产品料号P/N:SYT112****GWA1DA2(2.5G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector
卡口方向Latch: Tab Down
适用传输速率Speed: 2.5G Base-T
线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1
电感OCL: 180uH Minimum @100K Hz, 0.1V
是否带灯With LED: No
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

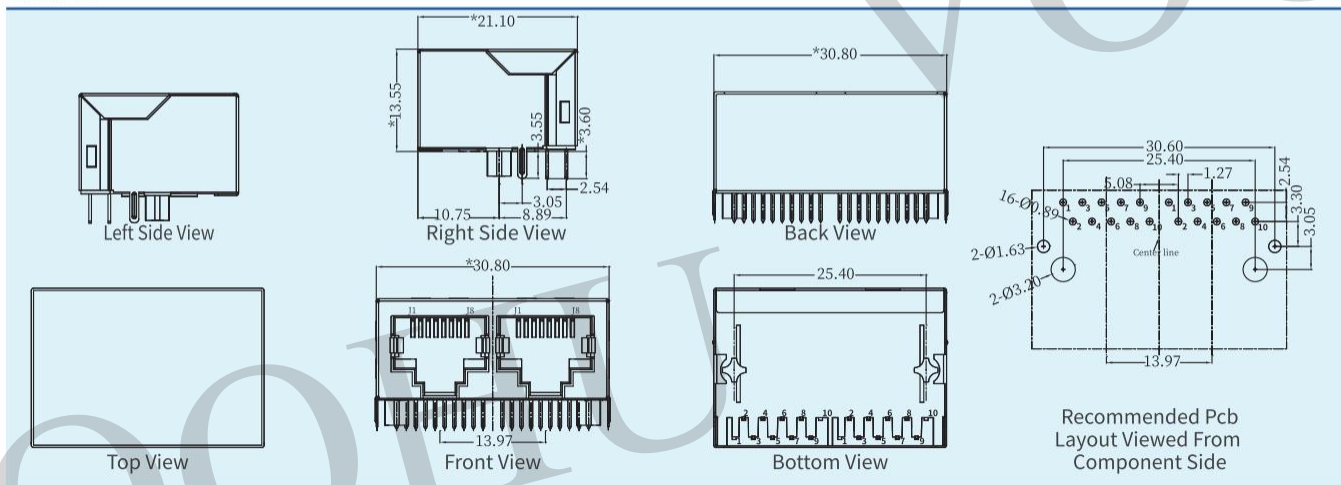


产品料号P/N:SYT112****AA2A1DA2(2.5G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector
卡口方向Latch: Tab Down
适用传输速率Speed: 2.5G Base-T
线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1
电感OCL: 180uH Minimum @100K Hz, 0.1V
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

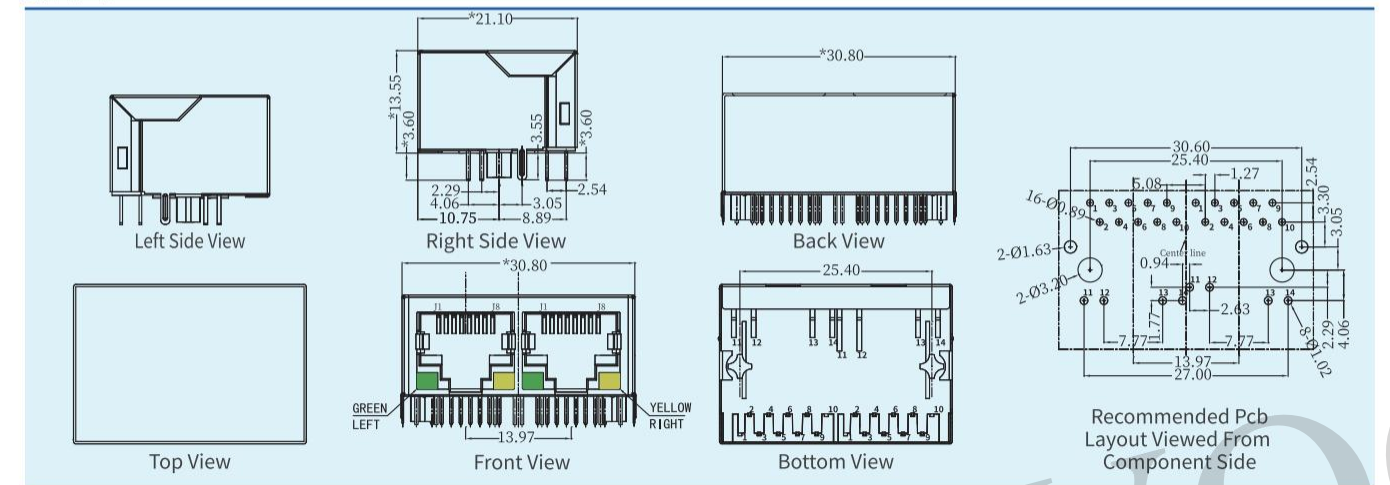



产品料号P/N:SYT112****DA2A1DA2(2.5G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 2.5G Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 180uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

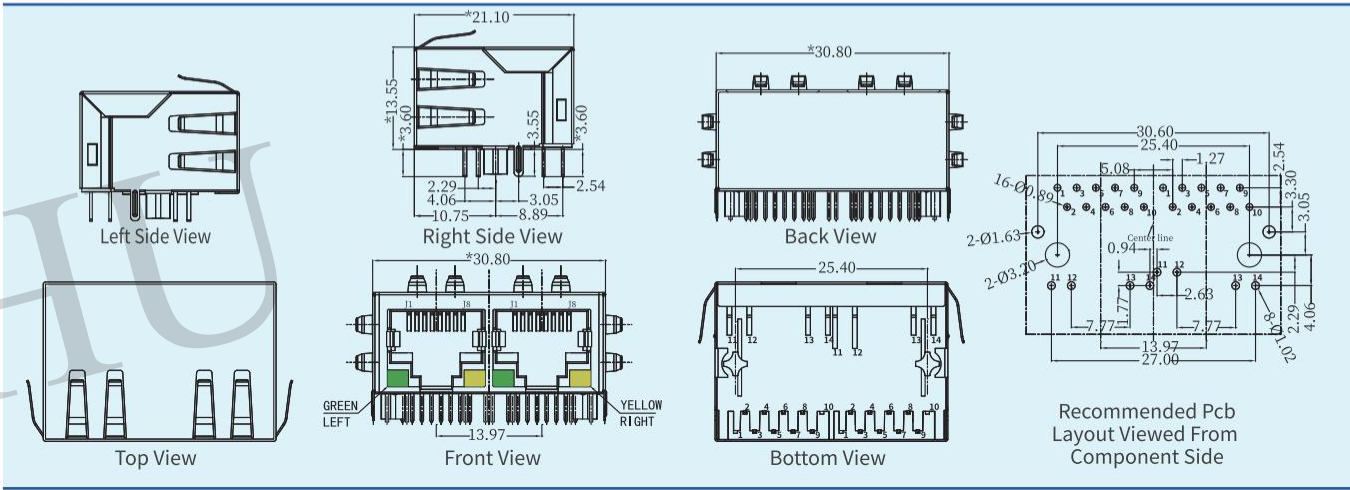



产品料号P/N:SYT114****GWA1DA2(2.5G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 2.5G Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 180uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional


使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

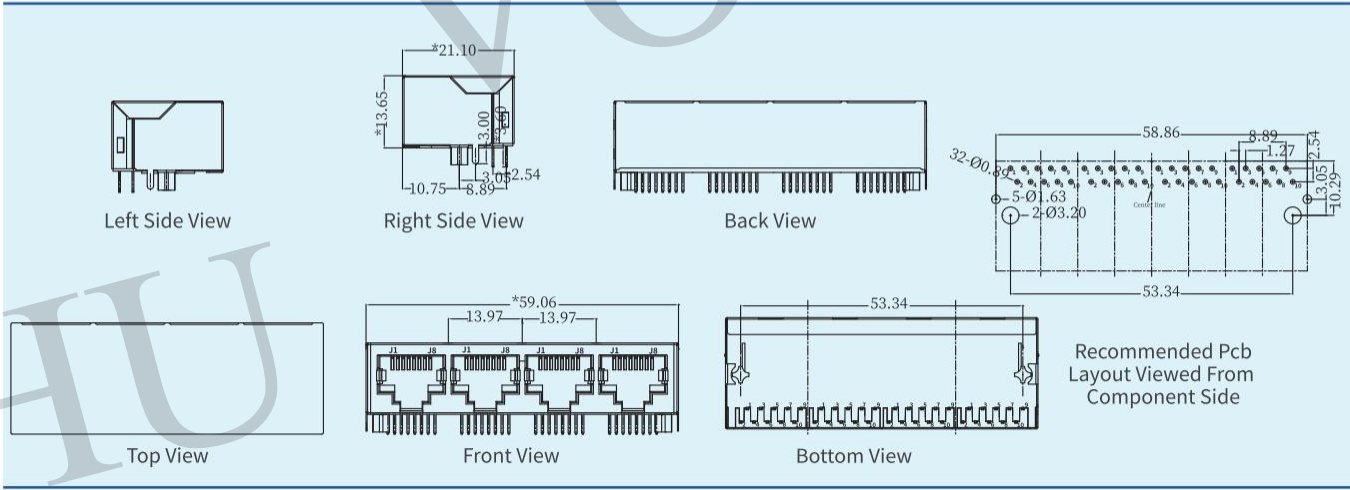

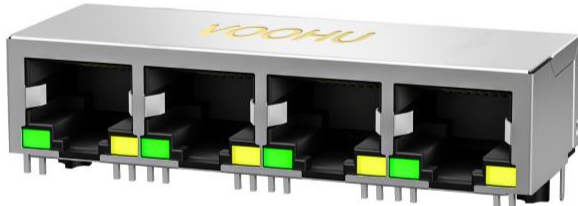

产品料号P/N:SYT112****AA2A1DA2(2.5G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 2.5G Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 180uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional


使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

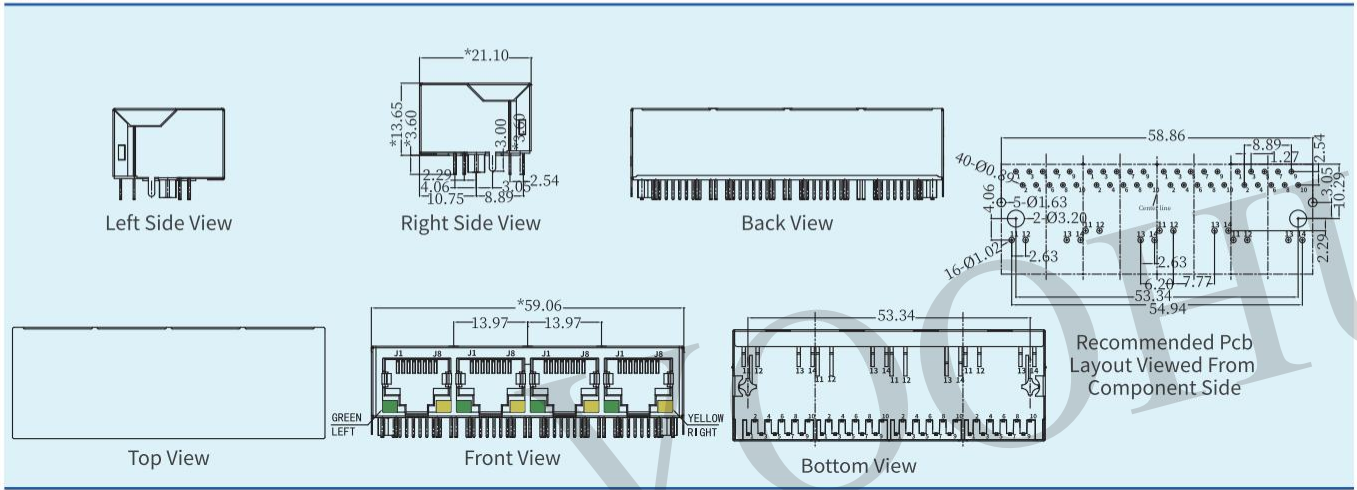

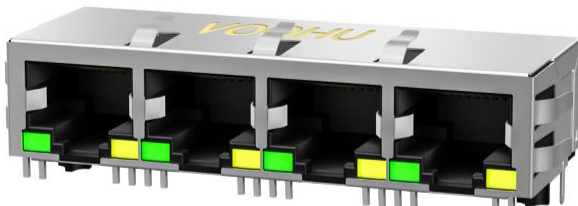

产品料号P/N:SYT114****DA2A1DA2(2.5G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 2.5G Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 180uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

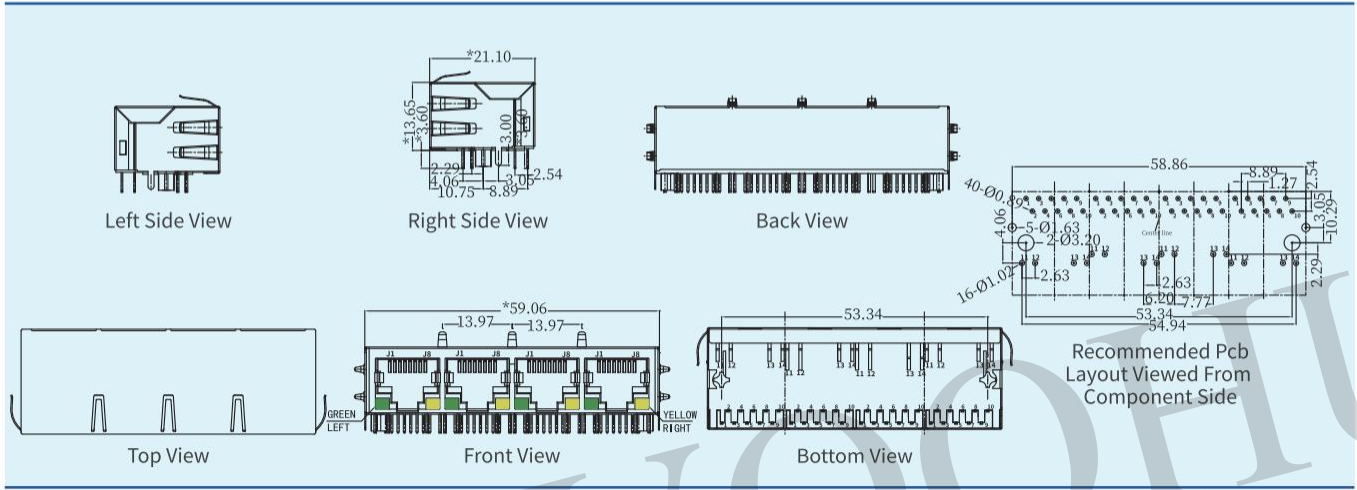



产品料号P/N:SYT811****FG5A2DB5(5G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 5G Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 160uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / Orange / R-Green / Orange


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

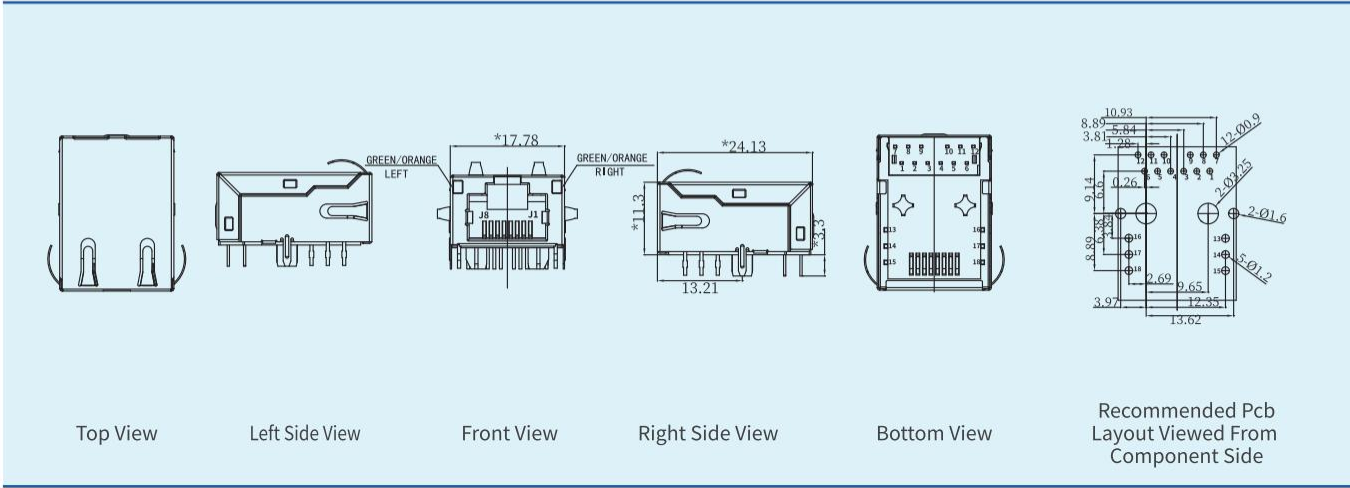

产品料号P/N:SYT1611****FF3A2DC5(5G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 5G Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 160uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / Yellow / R-Green


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

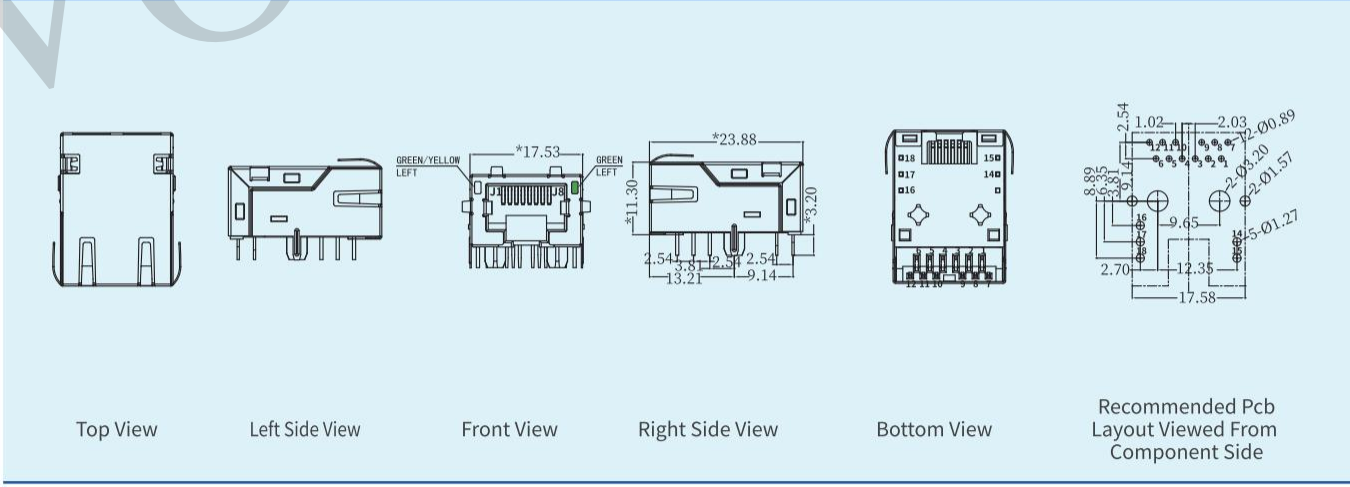

产品料号P/N:SYT811****GWA2DB(10G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10G Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 120uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

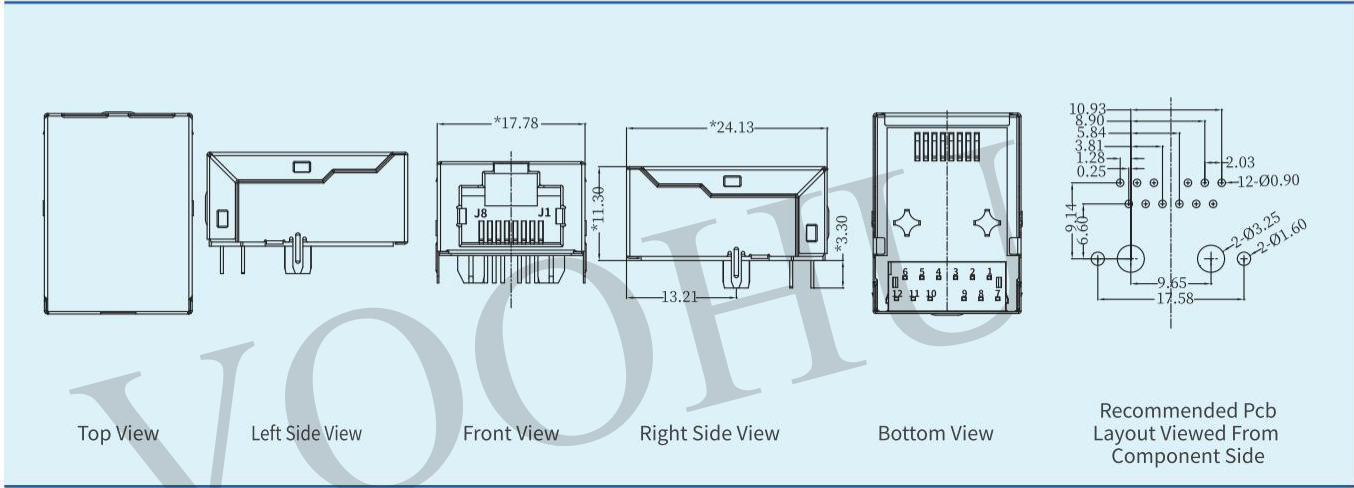

产品料号P/N:SYT811****HWA2DB1(10G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10G Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 120uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

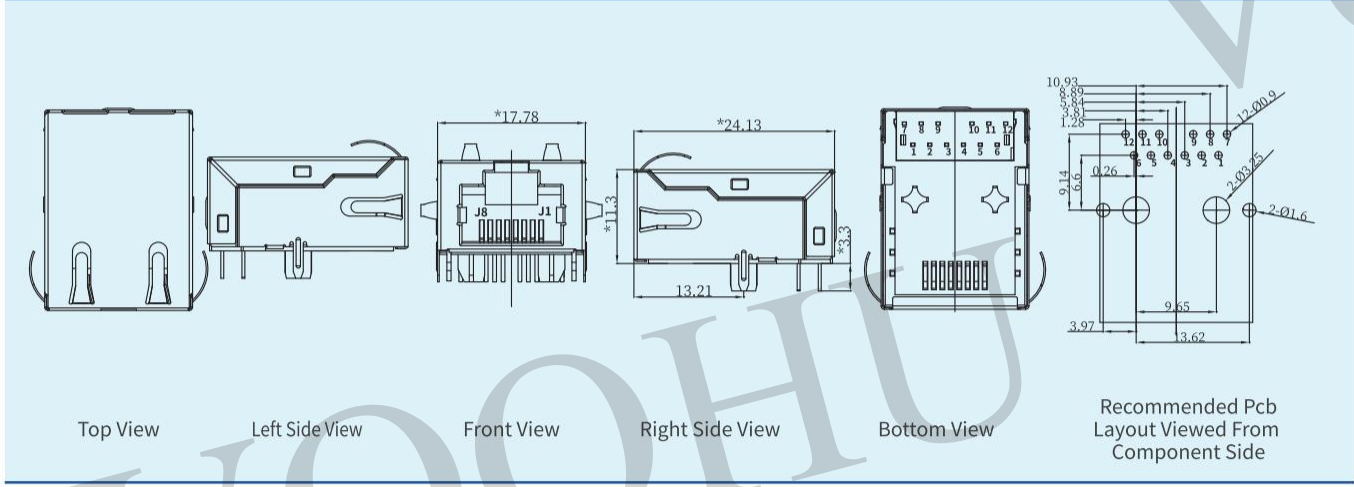



产品料号P/N:SYT1211****FF4A10DC(10G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10G Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 120uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / Yellow / R-Green



接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

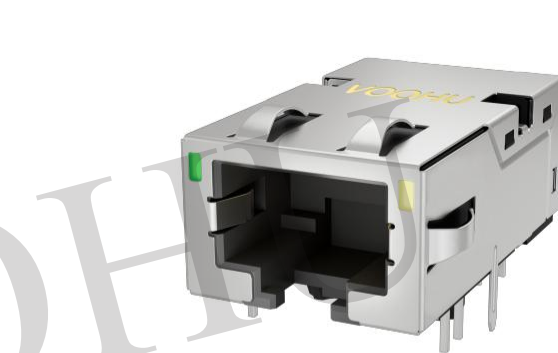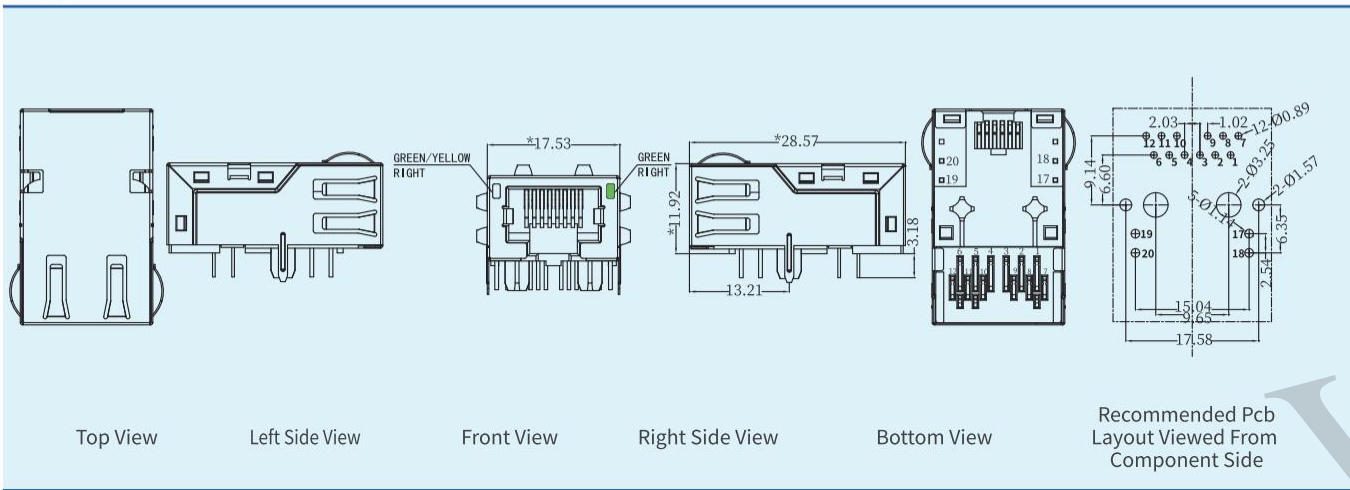

产品料号P/N:SYT1611****FB2A2DB1(10G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

适用传输速率Speed: 10G Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 120uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

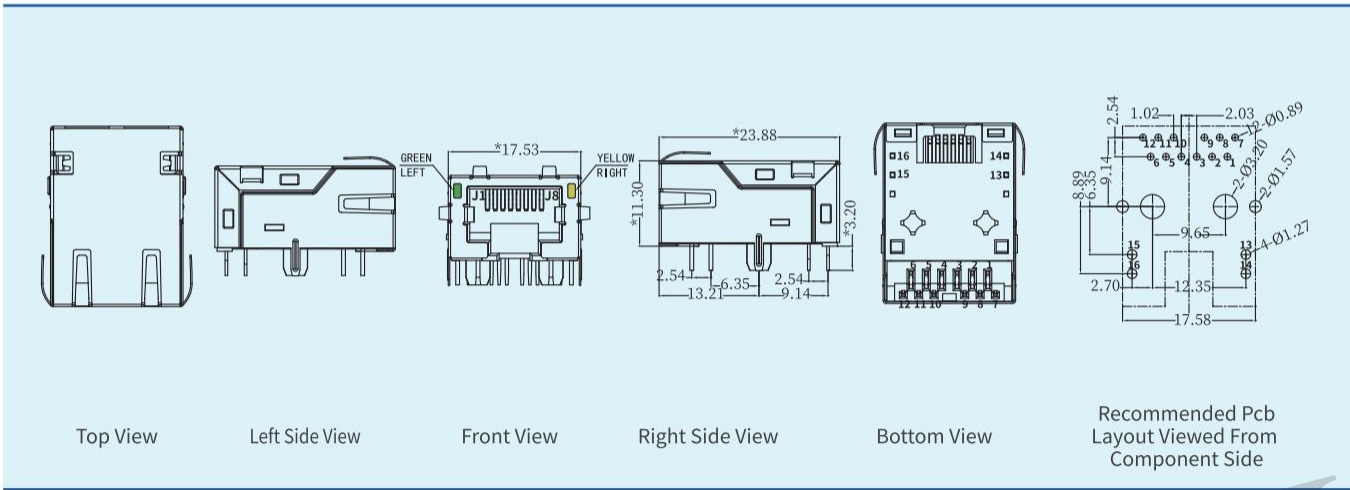

产品料号P/N:SYT414****HWA2DC1(10G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10G Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 120uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

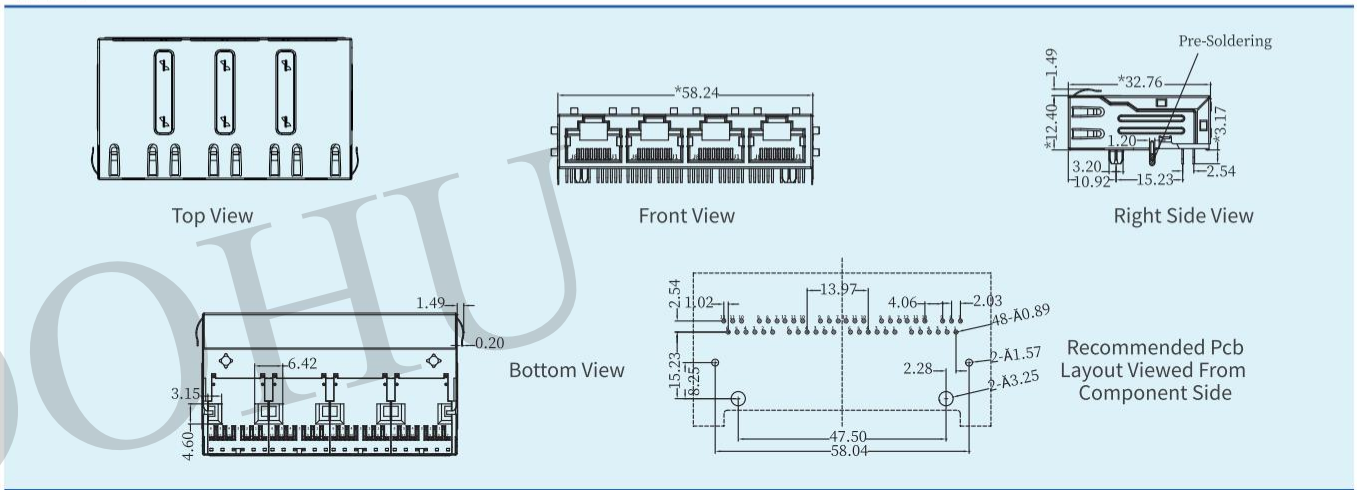

产品料号P/N:SYT414****DB2A2DC1(10G) (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

适用传输速率Speed: 10G Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 120uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional


使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

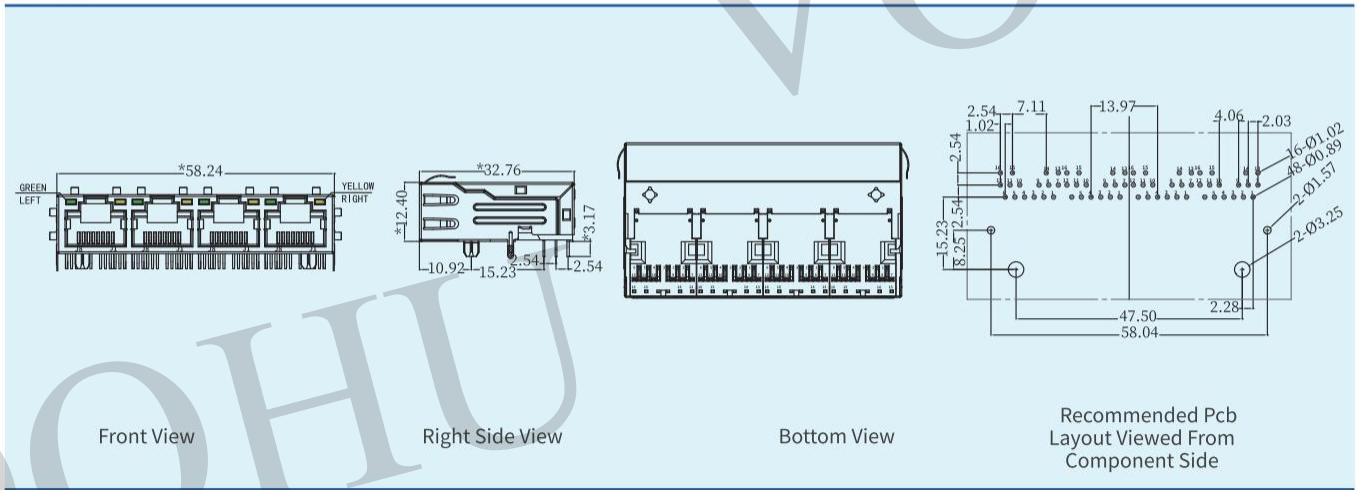

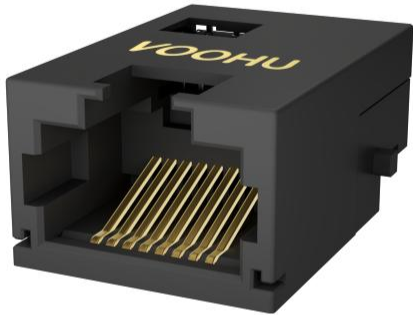

产品料号P/N:SYT1511****IWW4CBD (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 low-profile connector with transformer

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THR or SMT optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

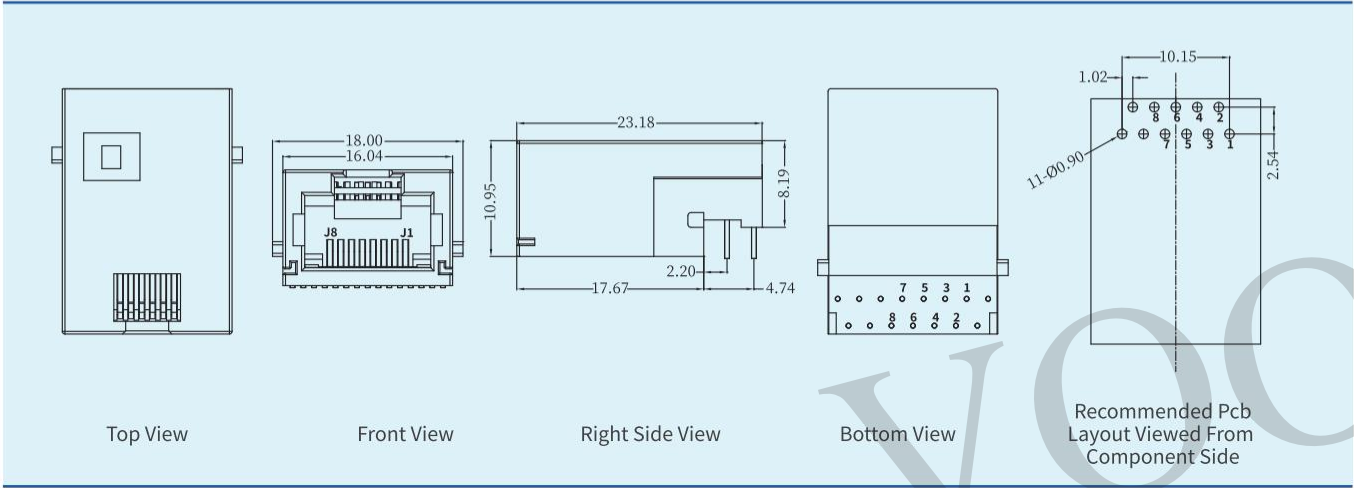

产品料号P/N:SYT211****GWA7CBS (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 SMT connector with transformer

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: SMT

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

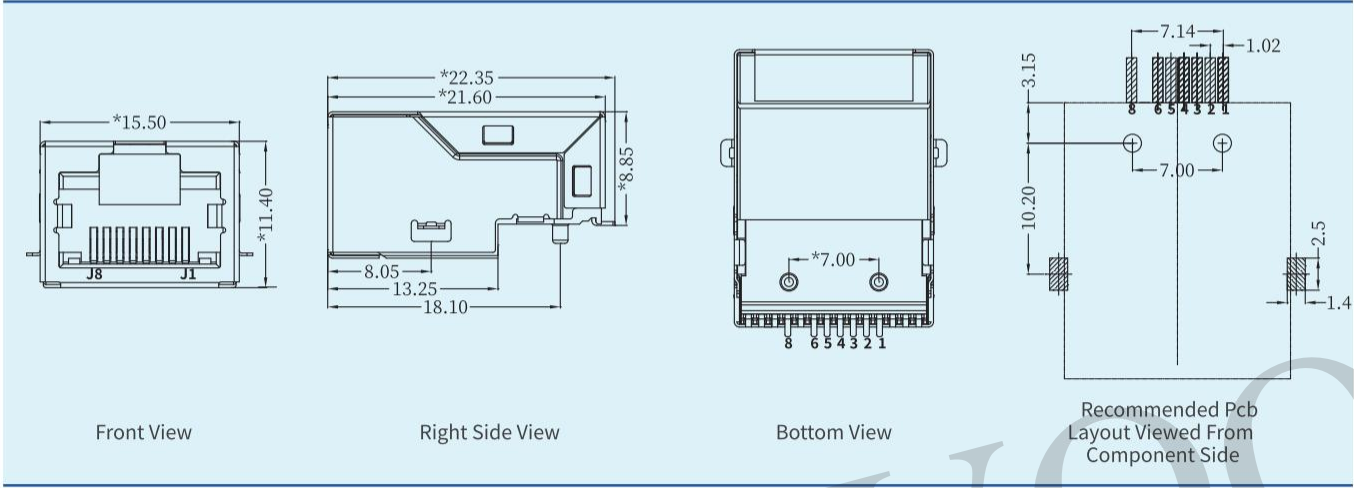

产品料号P/N:SYT111****GWA7S (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 SMT connector with transformer

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: SMT

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

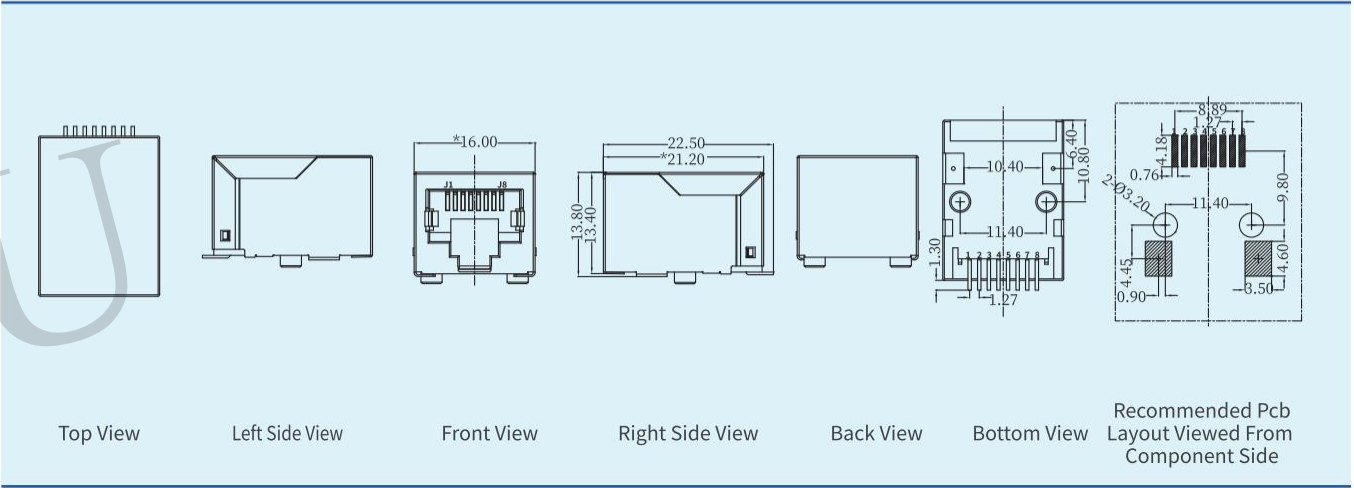

产品料号P/N:SYT111****HWA7S (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 SMT connector with transformer

卡口方向Latch: Tab Down

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: No


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: SMT

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

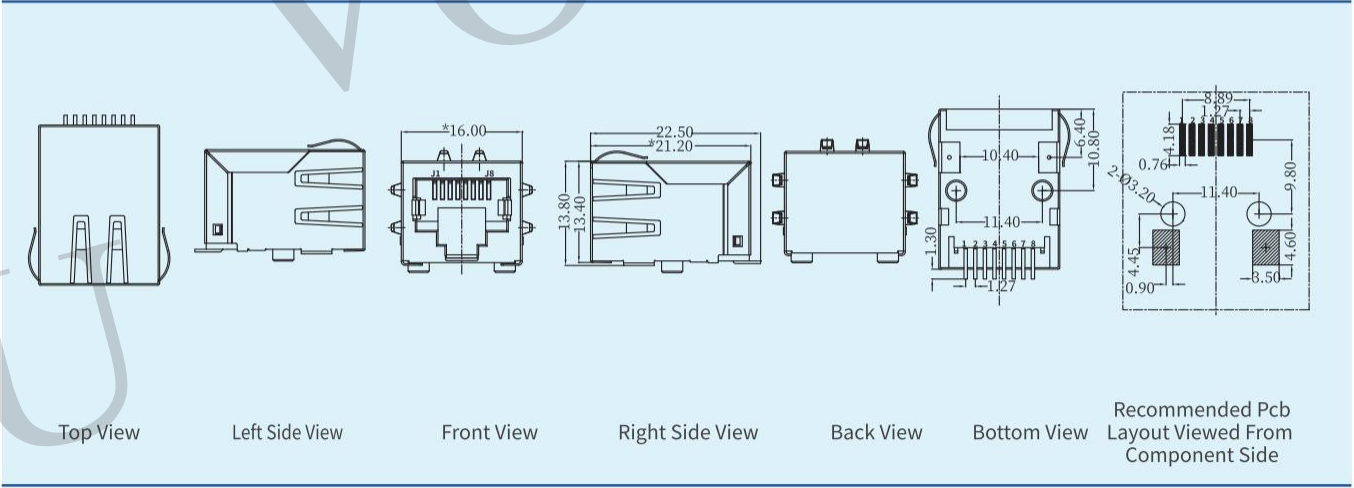



产品料号P/N:SYT1511****CB2W7CBD (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 low-profile connector with transformer

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

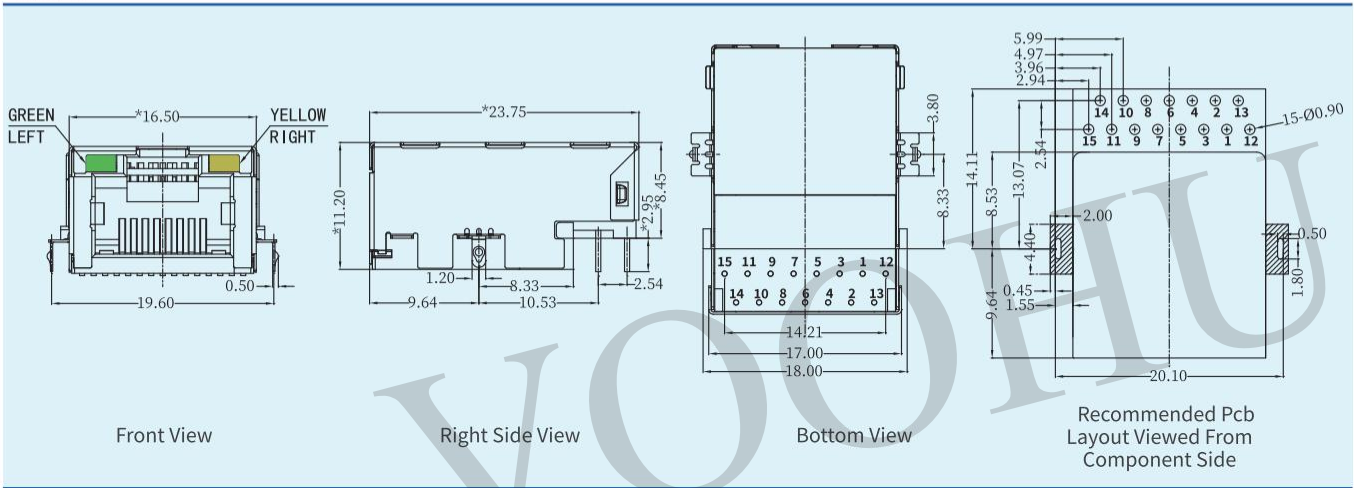

产品料号P/N:SYT1511****CF5W7CBD (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 low-profile connector with transformer

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / orange / R-Yellow



接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

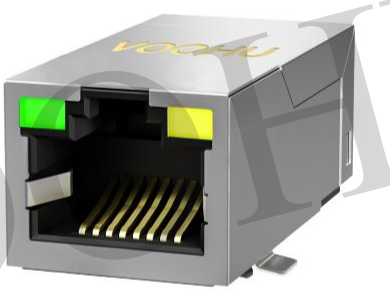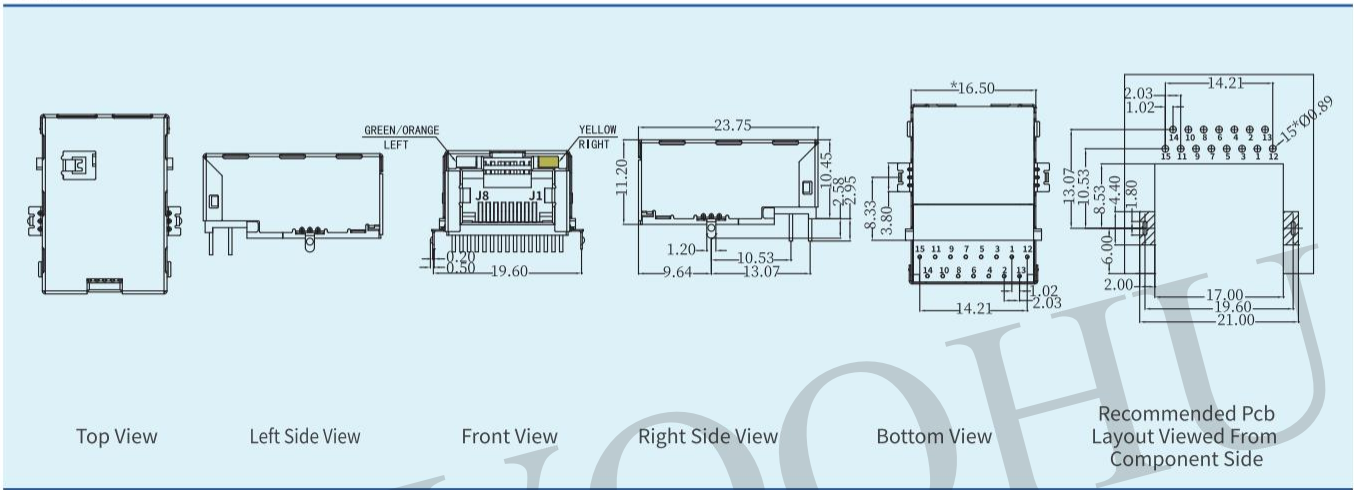

产品料号P/N:SYT311****AA2A7S (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 SMT connector with transformer

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Green / R-Yellow


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: SMT

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

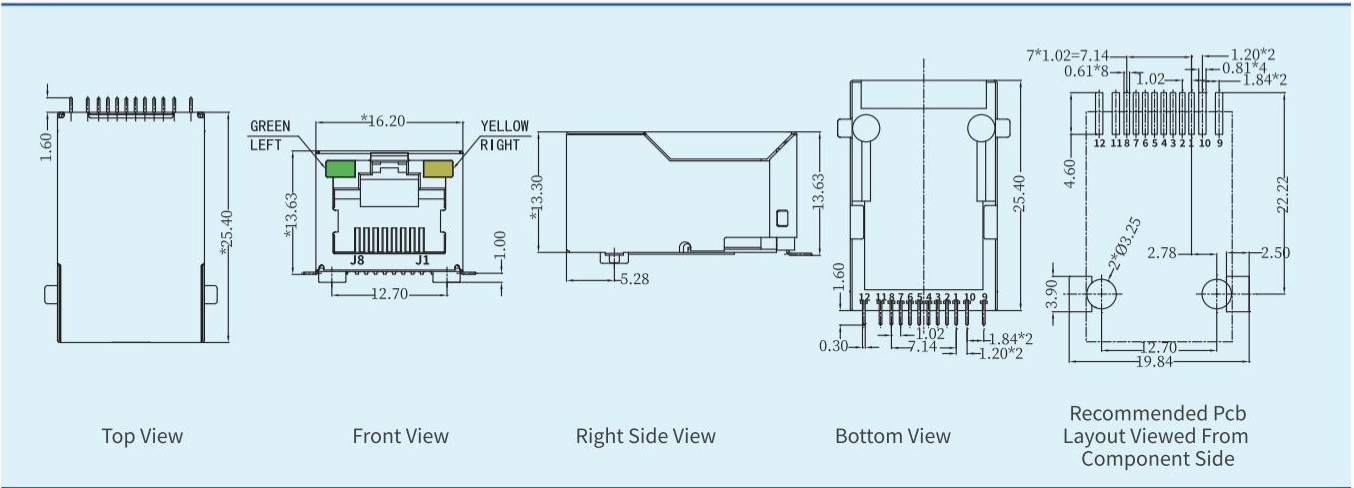

产品料号P/N:SYT211****AA1A7S (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 SMT connector with transformer

卡口方向Latch: Tab Up

适用传输速率Speed: 10/100/1000M Base-T

线圈结构Coil Structure: Toroidal,Turns ratio: 1CT:1

电感OCL: 350uH Minimum @100K Hz,0.1V

是否带灯With LED: Yes, L-Yellow / R-Green


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: 0~70°C or -40~85°C optional

适用制程Application process: SMT

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

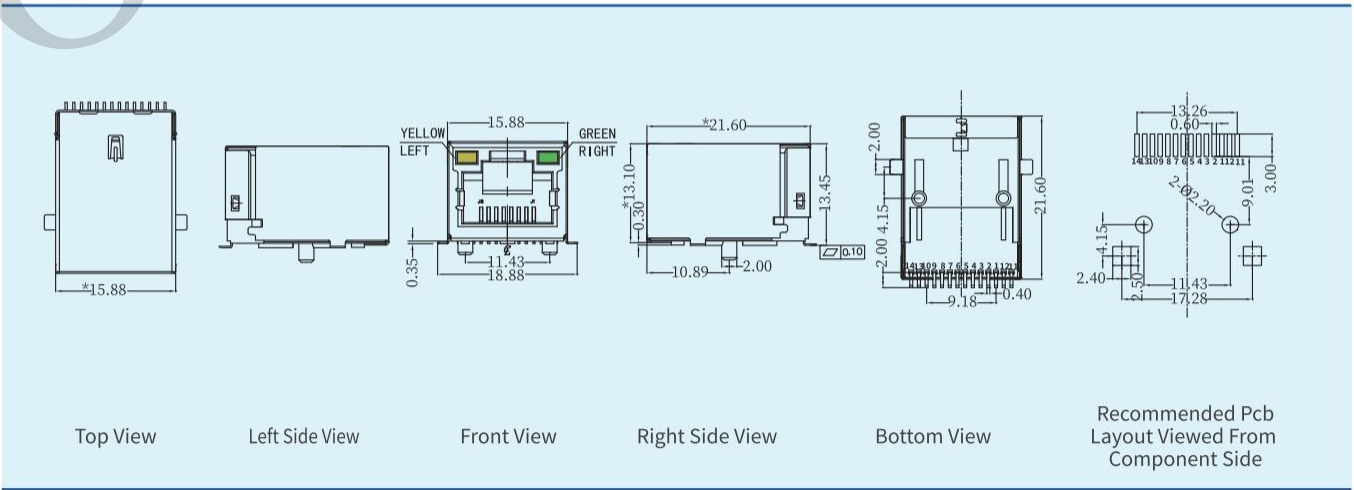





产品料号P/N:SYT211****DA1A7CBS (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz, 0.1V
是否带灯With LED: Yes, L-Yellow / R-Green
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: SMT
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

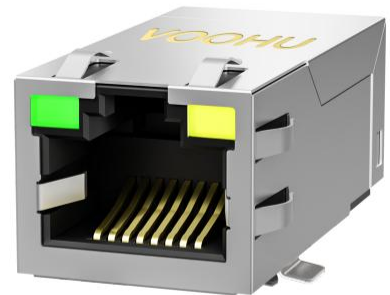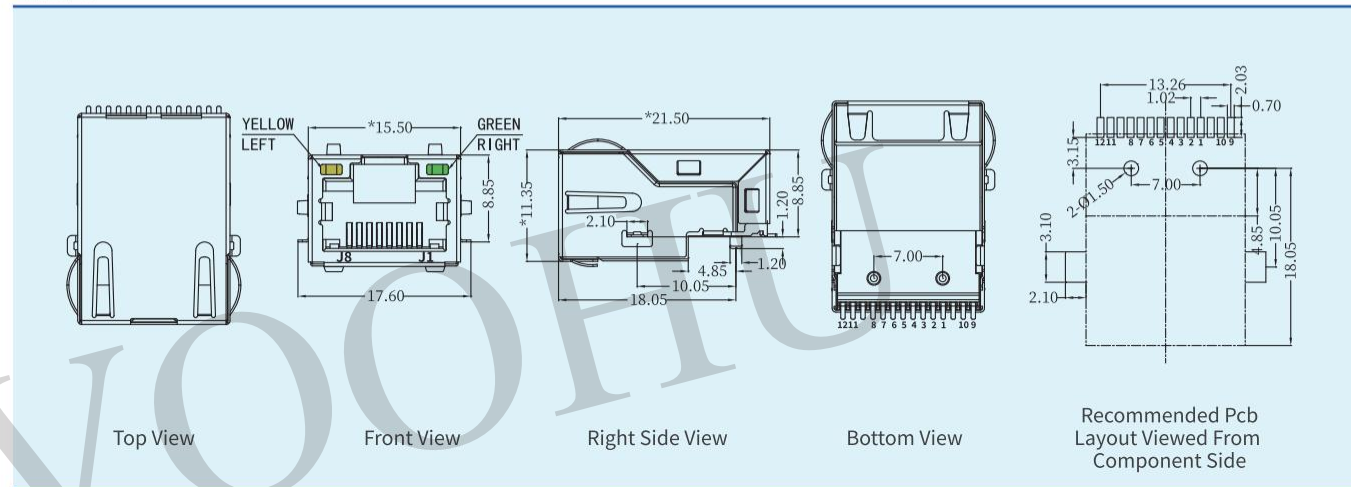


产品料号P/N:SYT311****DA2A7S (****: see transformer code)

产品规格Specifications:

类型Type: RJ45 connector
卡口方向Latch: Tab Up
适用传输速率Speed: 10/100/1000M Base-T
线圈结构Coil Structure: Toroidal, Turns ratio: 1CT:1
电感OCL: 350uH Minimum @100K Hz, 0.1V
是否带灯With LED: Yes, L-Green / R-Yellow
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: 0~70°C or -40~85°C optional
适用制程Application process: SMT
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

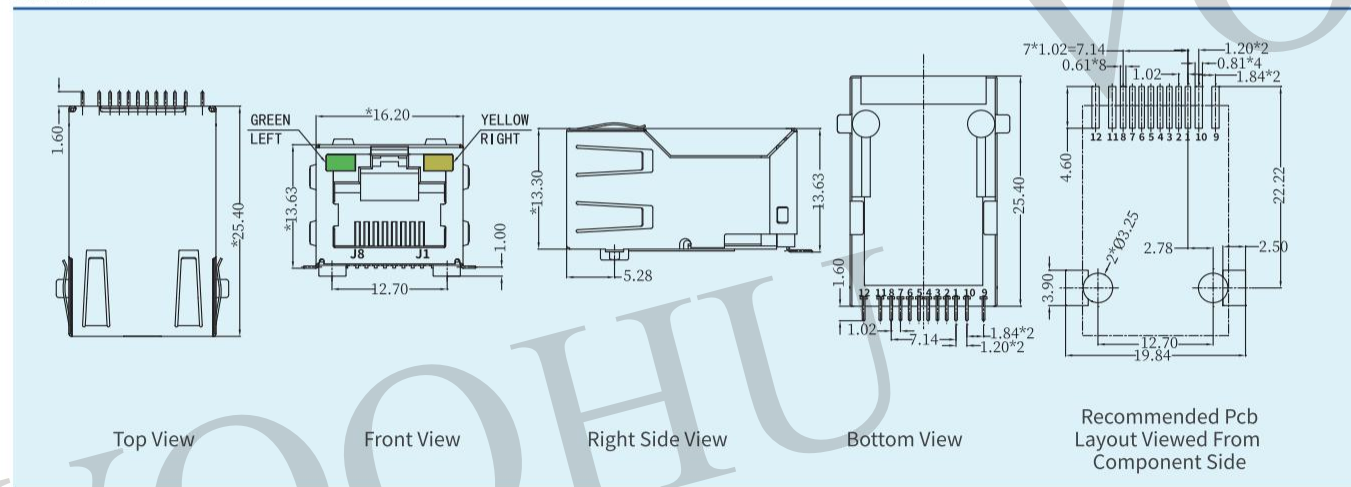

+ 非集成变压器系列

RJ11系列Connector

RJ12系列Connector

RJ56系列Connector



RJ59系列Connector

RJ45SMT/沉板系列




产品料号P/N:SYT52221144IWA1DY1
产品规格Specifications:
类型Type: RJ11 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

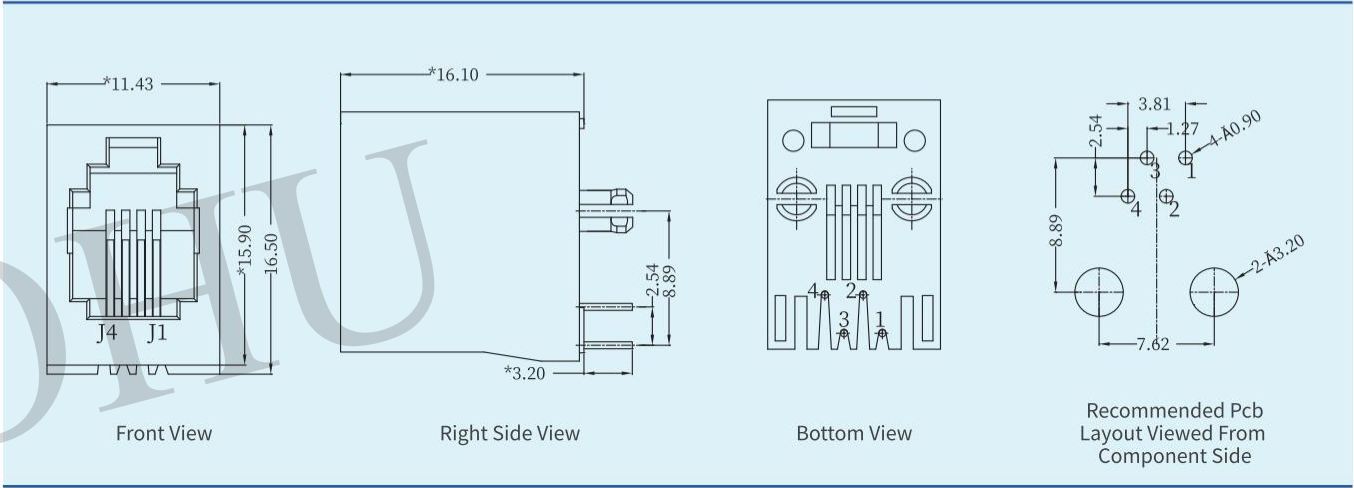


产品料号P/N:SYT5222E1144IWA1DY1
产品规格Specifications:
类型Type: RJ11 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

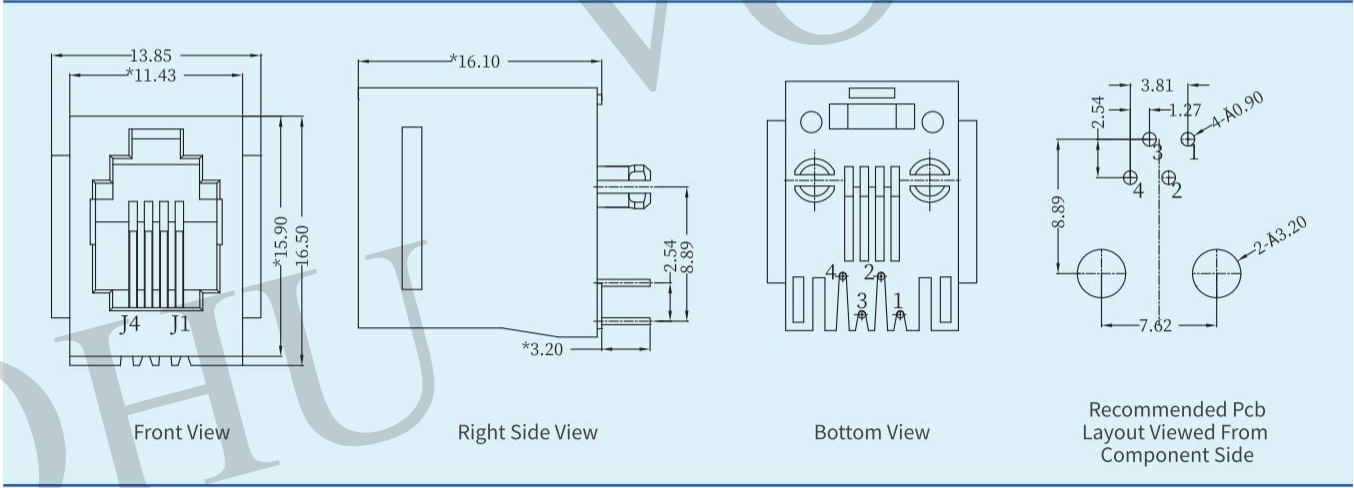


产品料号P/N:SYT52F1144IWA1DB4
产品规格Specifications:
类型Type: RJ11 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: T=0.35mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

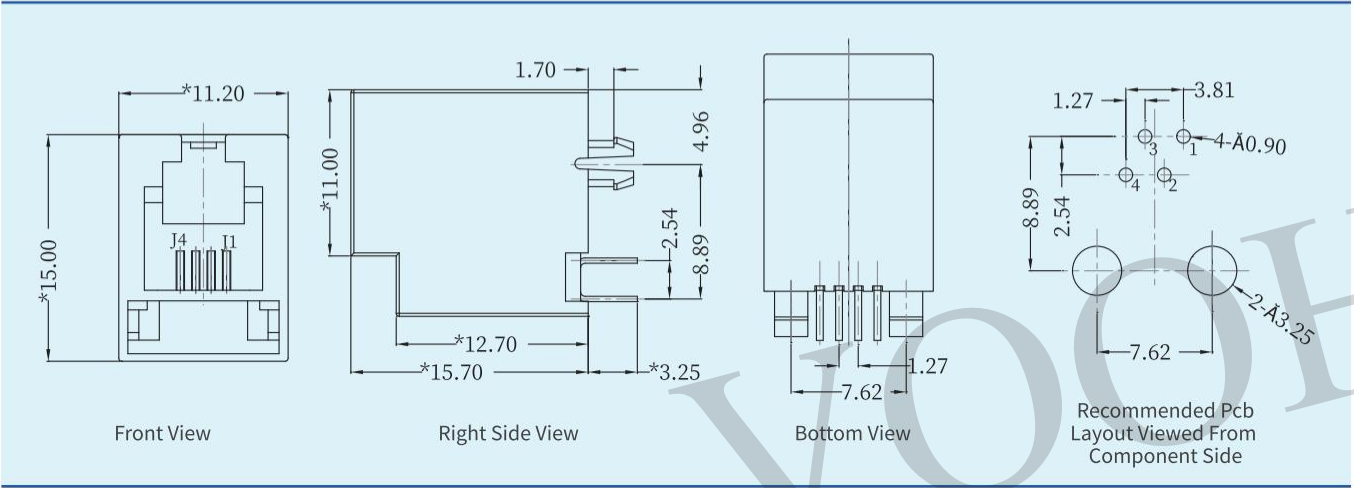

产品料号P/N:SYT52D1144IWW6SB3
产品规格Specifications:
类型Type: RJ11 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Phosphor bronze
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: SMT
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

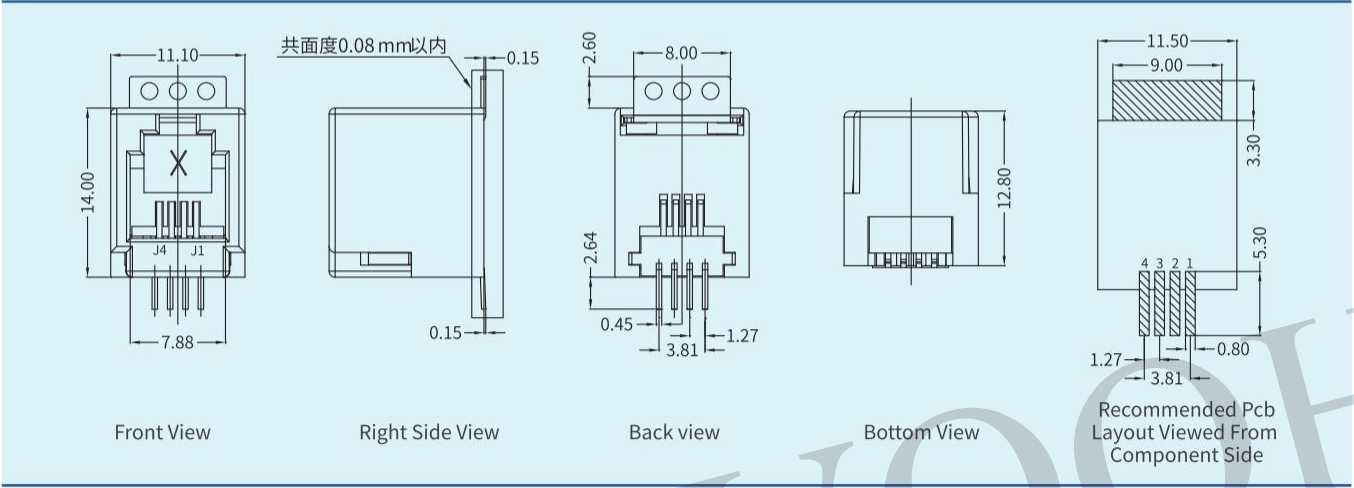





产品料号P/N:SYT52221166IWA1DY1
产品规格Specifications:
类型Type: RJ12 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

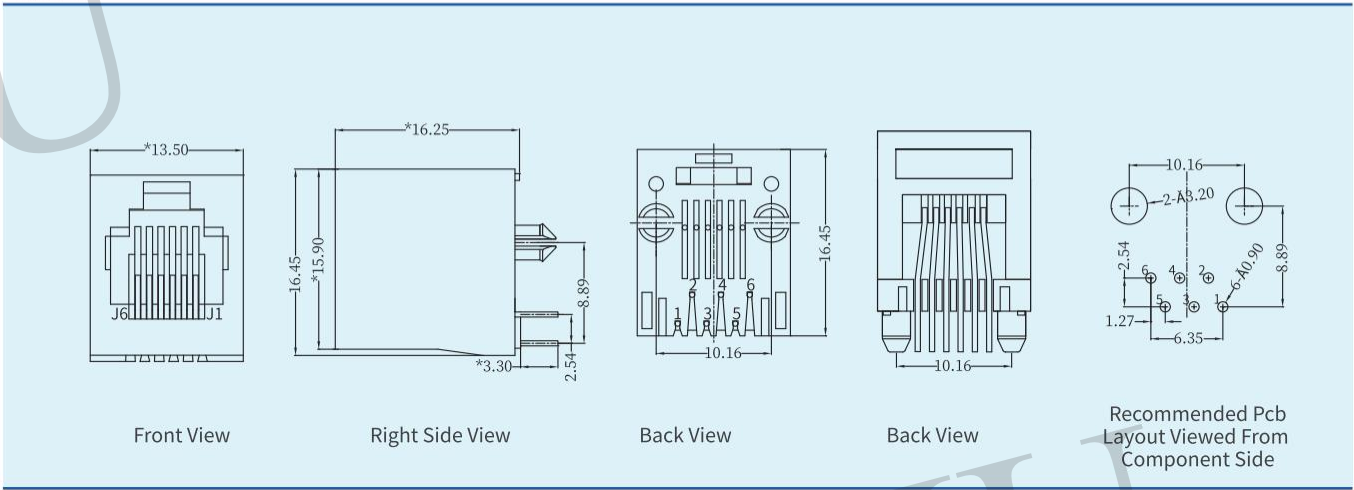


产品料号P/N:SYT5222E1164IWA1DY1
产品规格Specifications:
类型Type: RJ12 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

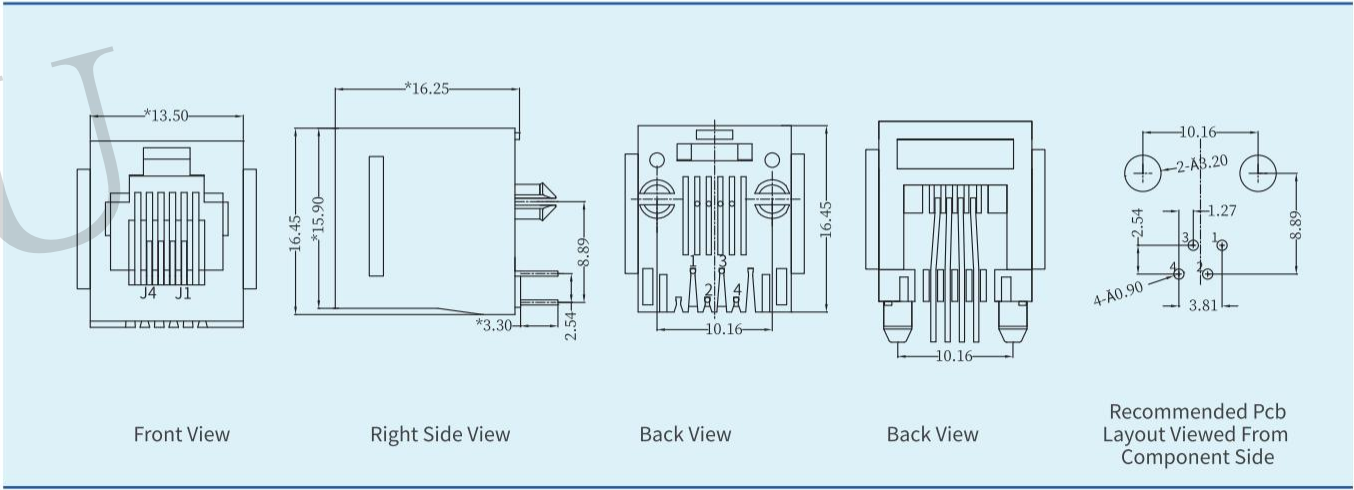


产品料号P/N:SYT5222E1166IWA1DY4
产品规格Specifications:
类型Type: RJ12 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

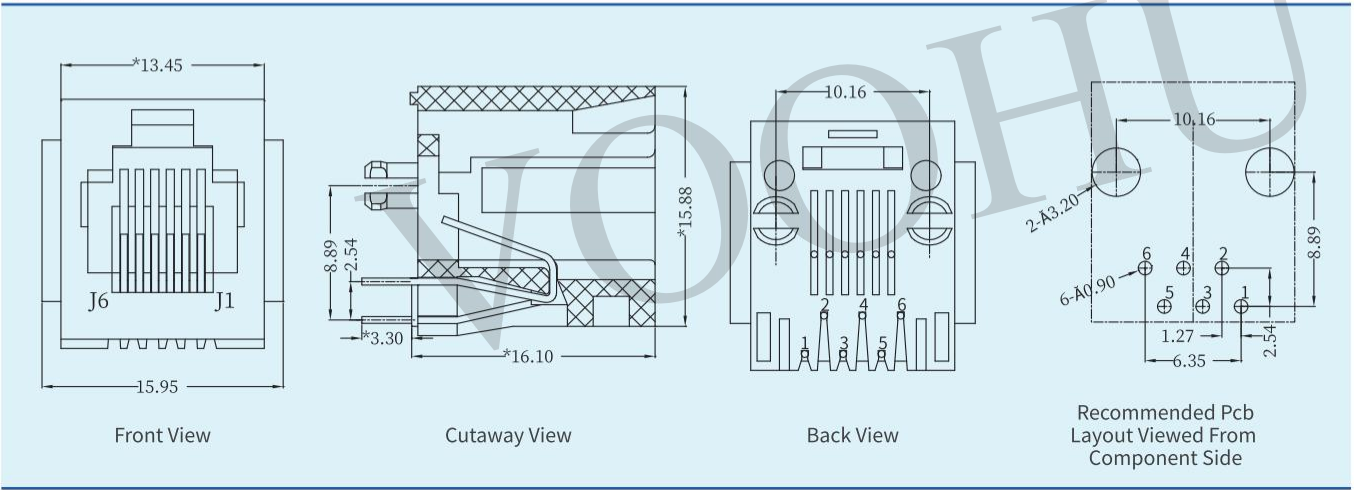

产品料号P/N:SYT52F1166IWA1DB4
产品规格Specifications:
类型Type: RJ12 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: T=0.35mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

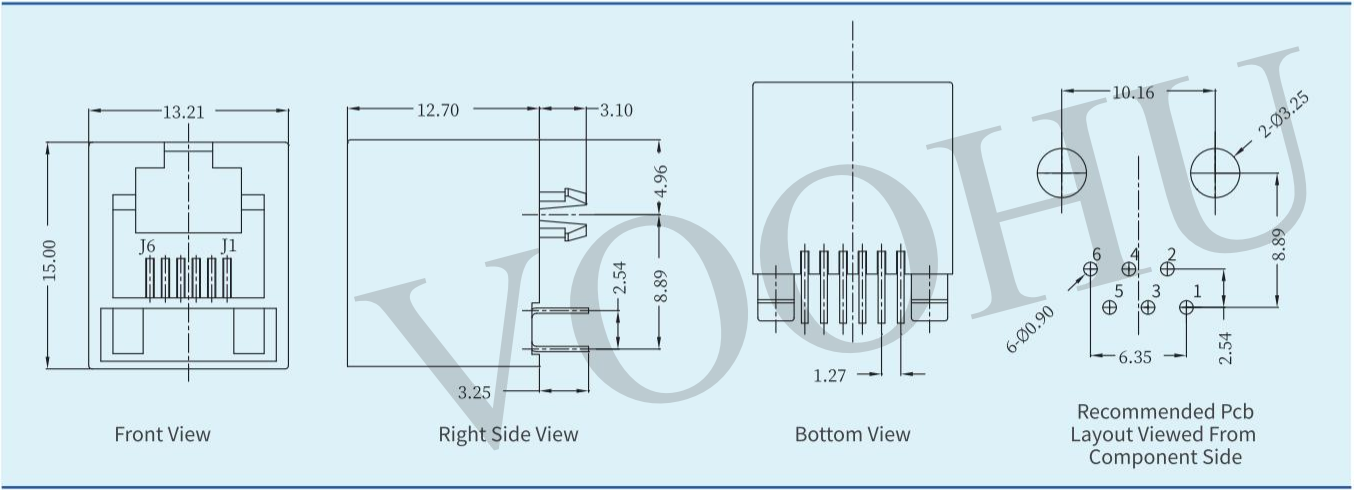




产品料号P/N:SYT52D1166IWW6SB4
产品规格Specifications:
类型Type: RJ12 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Phosphor bronze
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: SMT
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

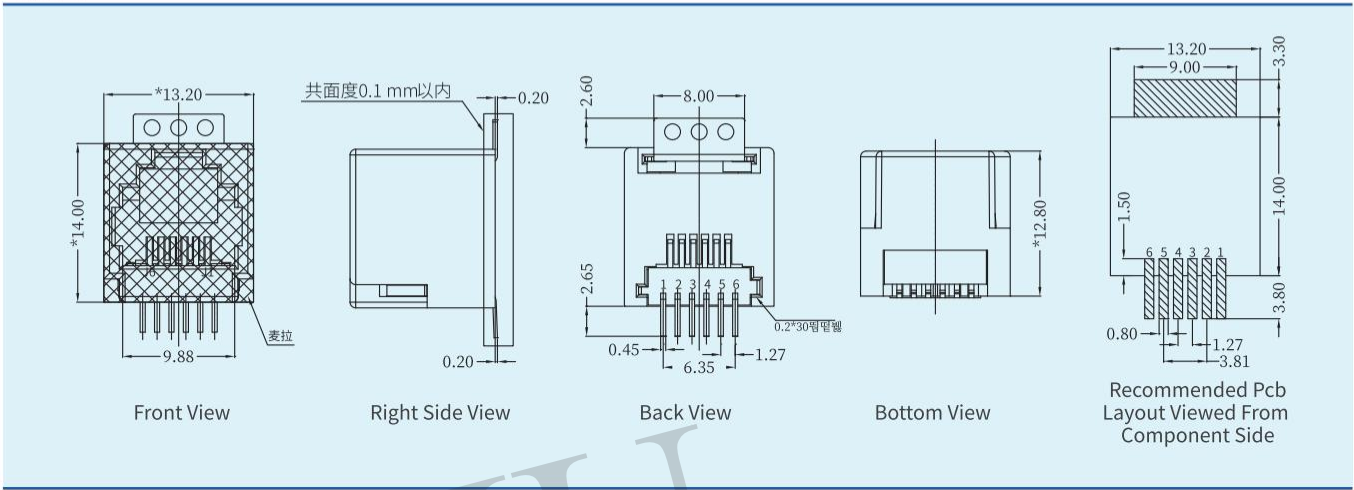


产品料号P/N:SYT52221188IWA1DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

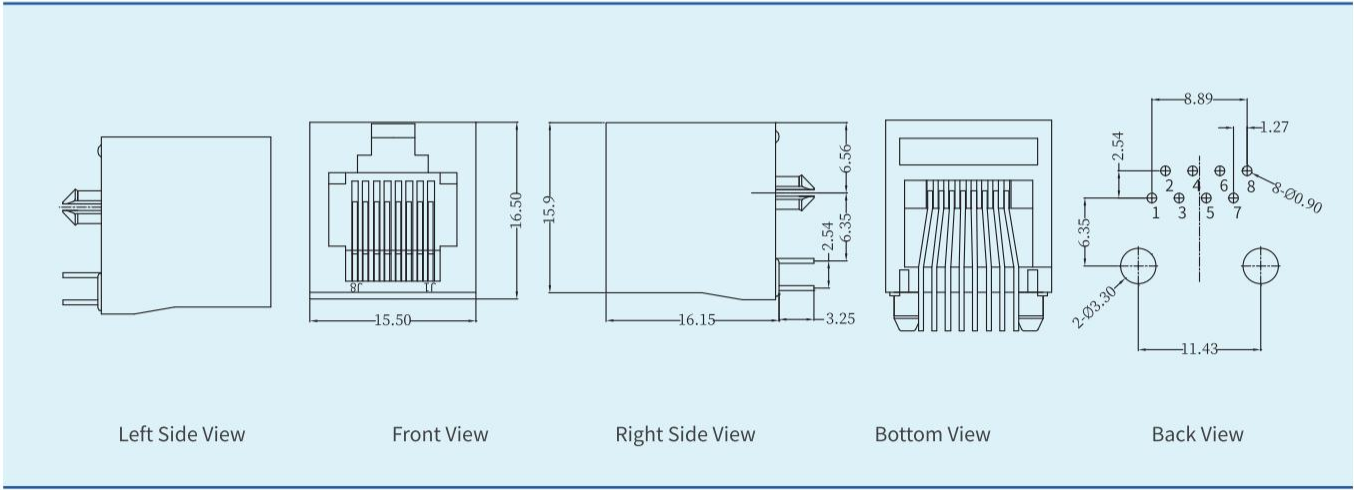


产品料号P/N:SYT5222E1188IWA1DY9
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

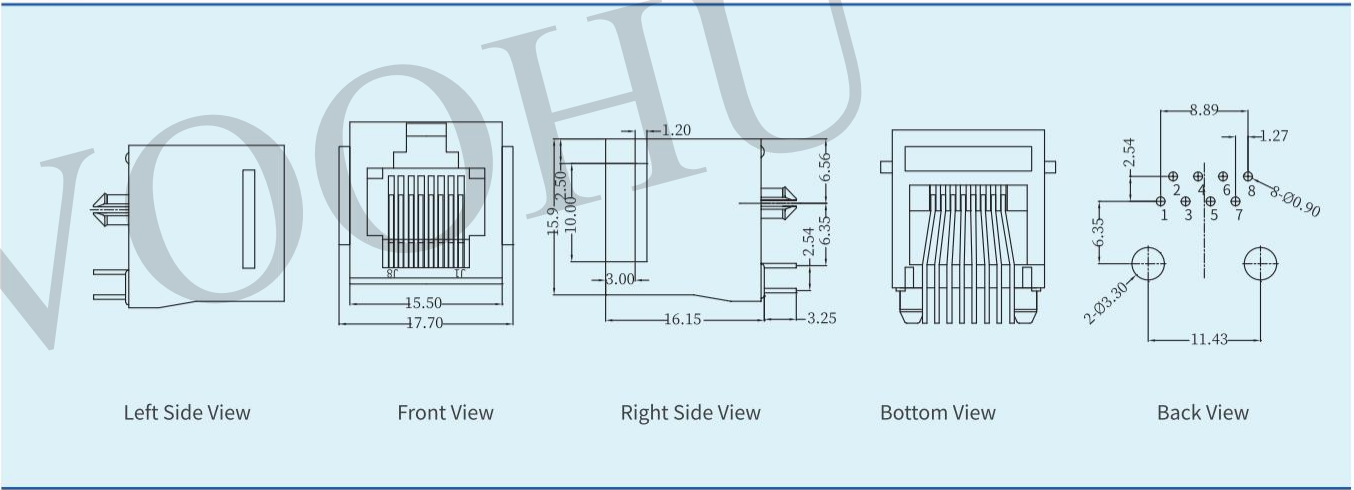

产品料号P/N:SYT52241188JB2A1DY3
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: Yes, L-Green / R-Yellow
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

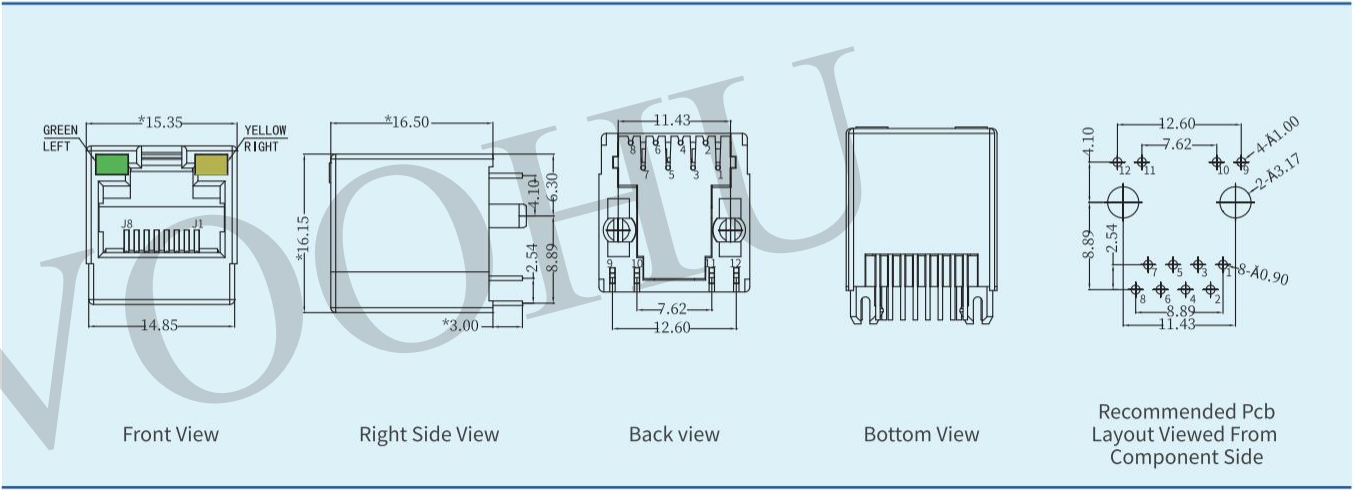



产品料号P/N:SYT52F1188GWA1D4B

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: No

是否带金属壳With shielding: Yes

接触端子Contact Terminal: T=0.35mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

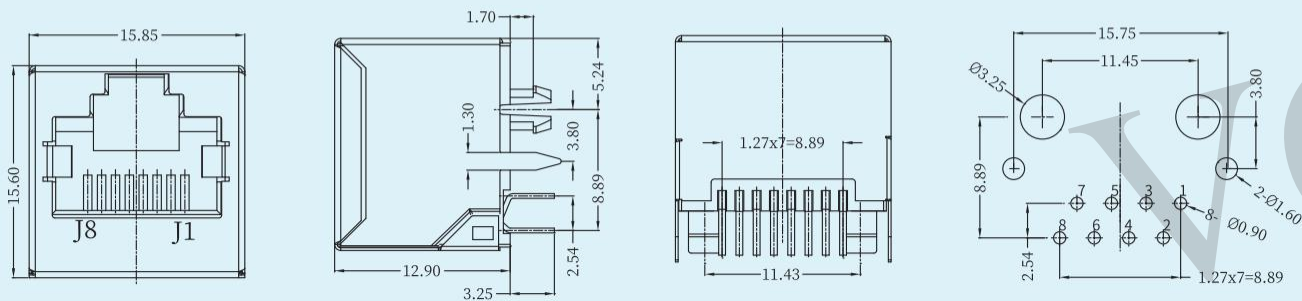

Front View

Right Side View

Back View

Recommended Pcb
Layout Viewed From
Component Side

产品料号P/N:SYT52A1188GWA1DY38

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: No

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

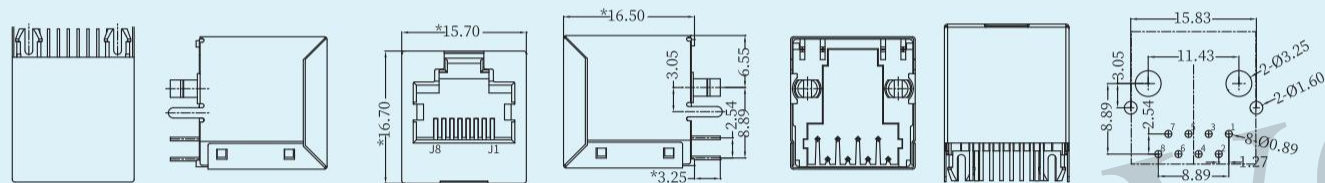

Top View

Left Side View

Front View

Right Side View

Back view

Bottom View

Recommended Pcb
Layout Viewed From
Component Side

产品料号P/N:SYT52T1188GWA1DY1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: No

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

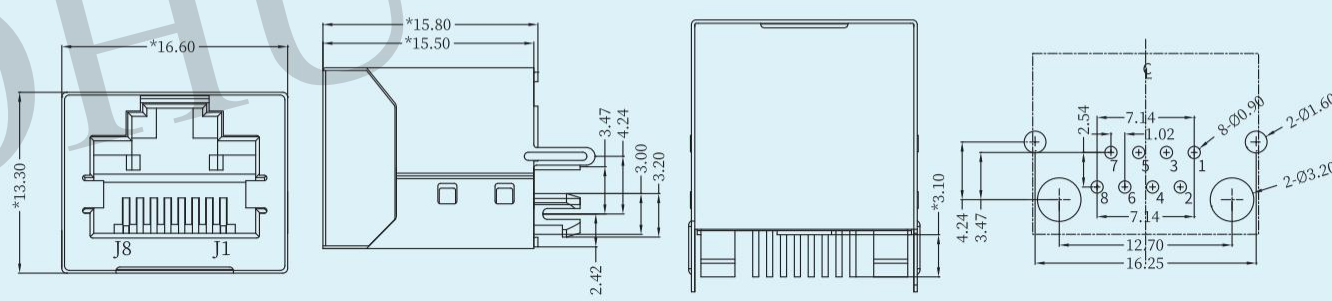

Front View

Right Side View

Bottom View

Recommended Pcb
Layout Viewed From
Component Side

产品料号P/N:SYT52A1188AB1A6D1Y1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: Yes, L-Yellow / R-Green

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

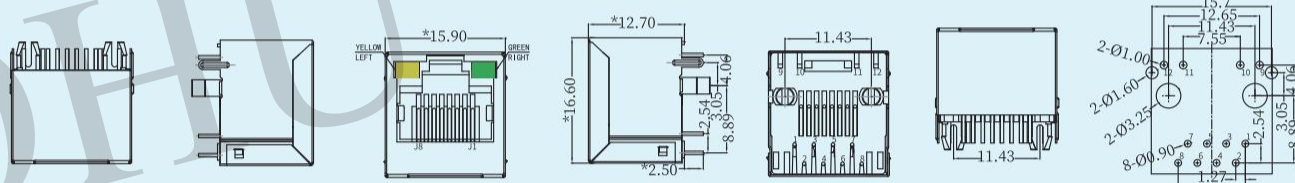

Top View

Left Side View

Front View

Right Side View

Back view


Bottom View

Recommended Pcb
Layout Viewed From
Component Side





产品料号P/N:SYT52241188AC1A3DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: Yes, L-Yellow / R-Green
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

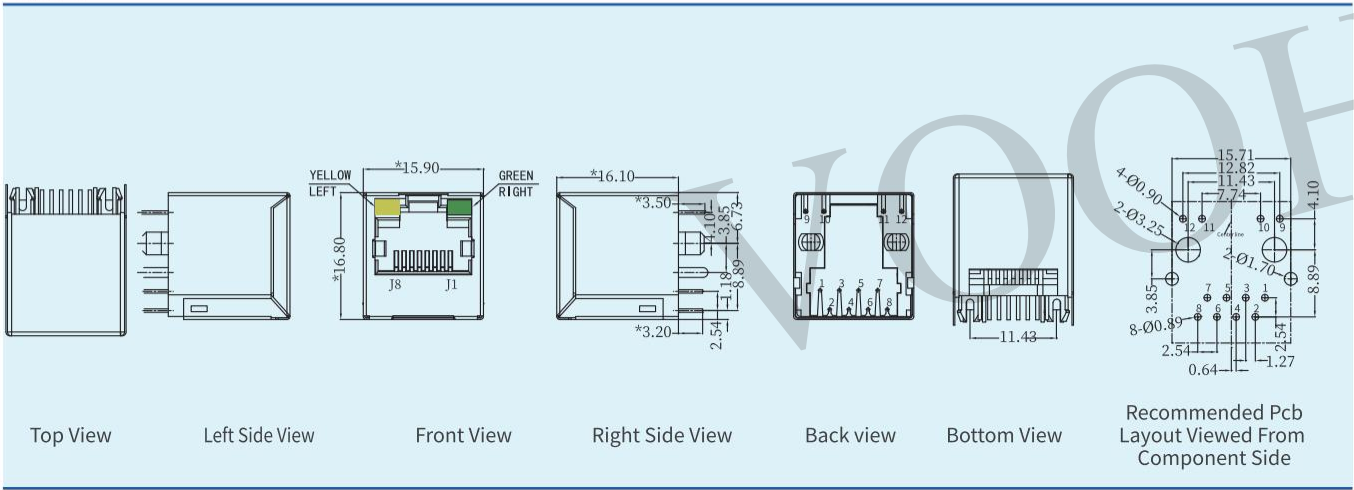


产品料号P/N:SYT52T1188AB1A1DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: Yes, L-Yellow / R-Green
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

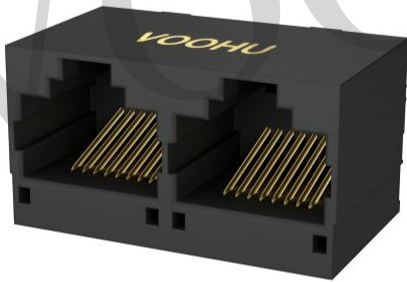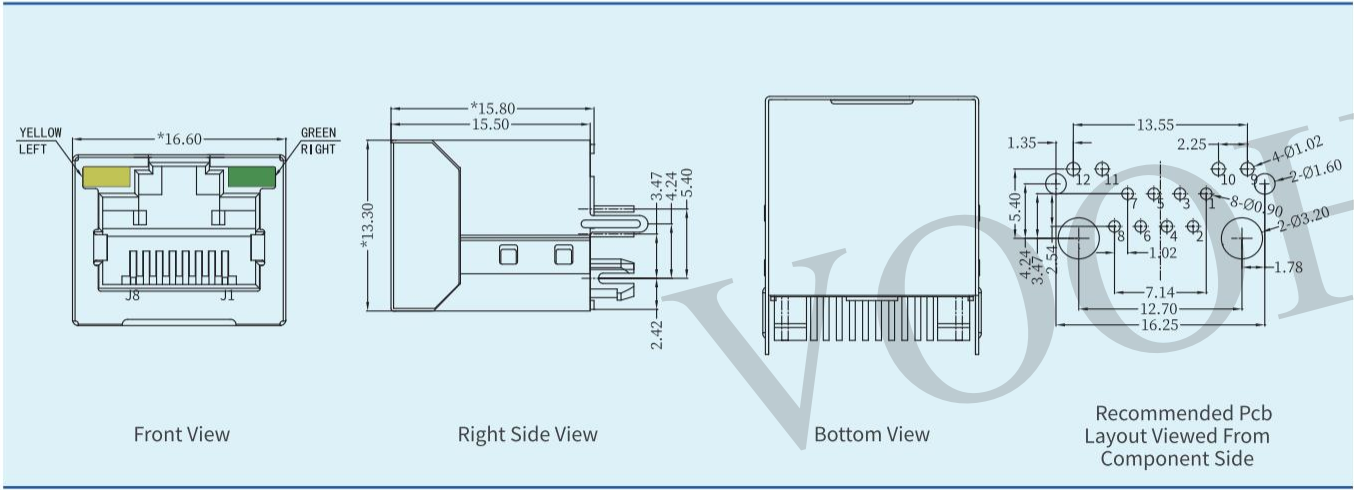


产品料号P/N:SYT52241288IWA1DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

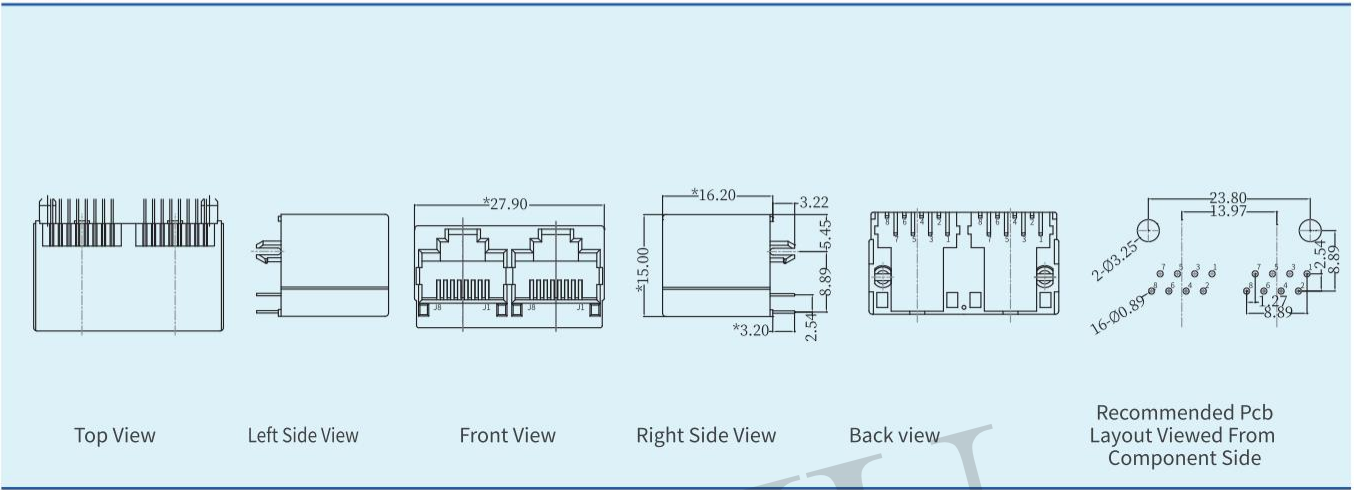

产品料号P/N:SYT52241288GWA1D4Y1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

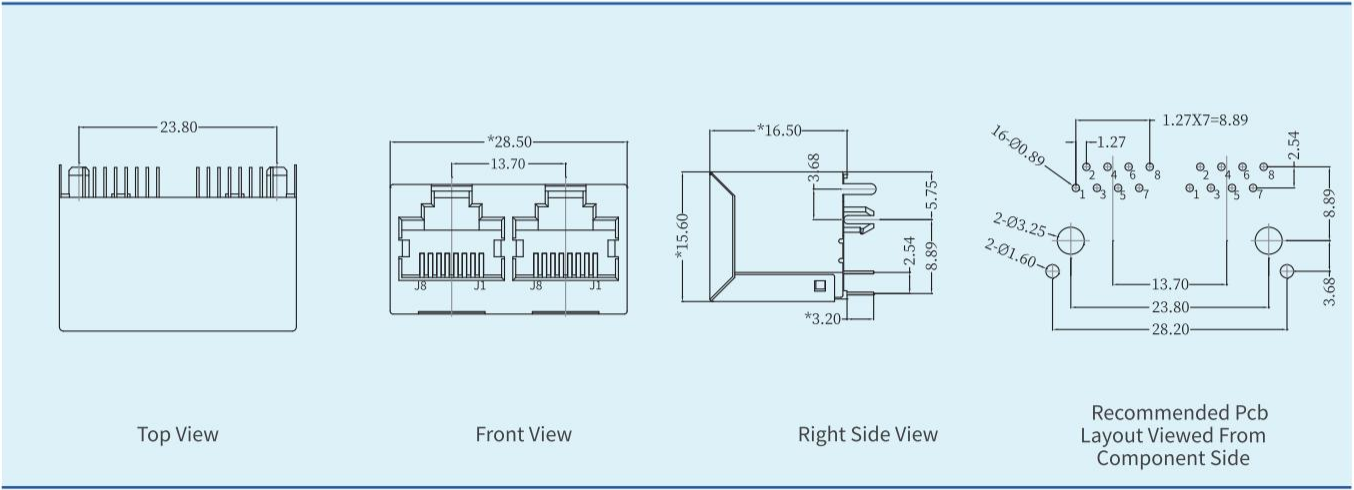




产品料号P/N:SYT53211144IWA1D1
产品规格Specifications:
类型Type: RJ11 connector
卡口方向Latch: Tab Down
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

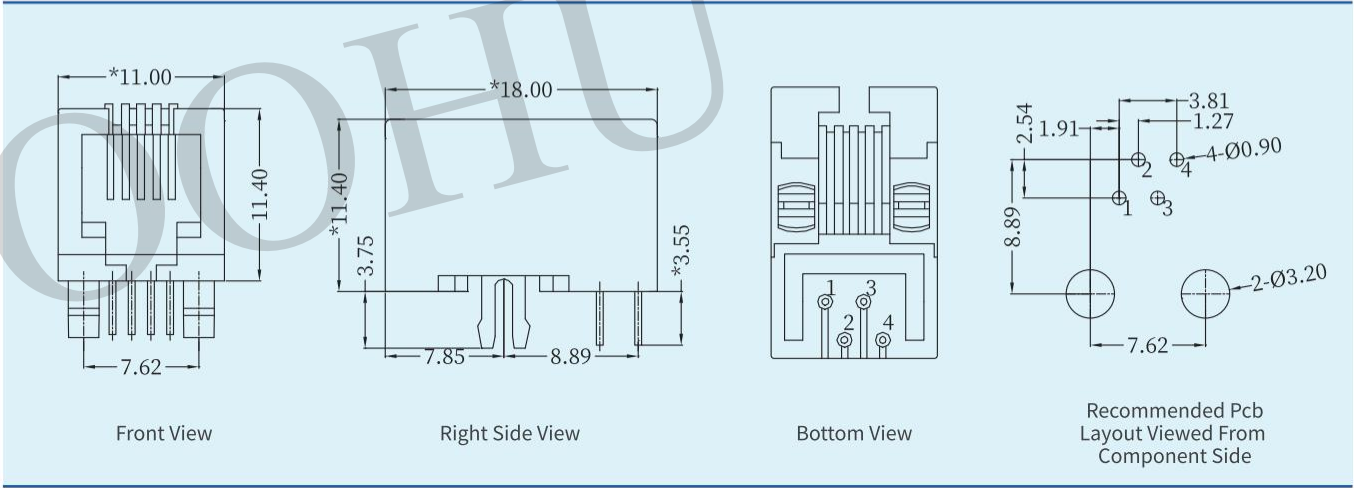


产品料号P/N:SYT53211166IWA1DY1
产品规格Specifications:
类型Type: RJ12 connector
卡口方向Latch: Tab Down
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

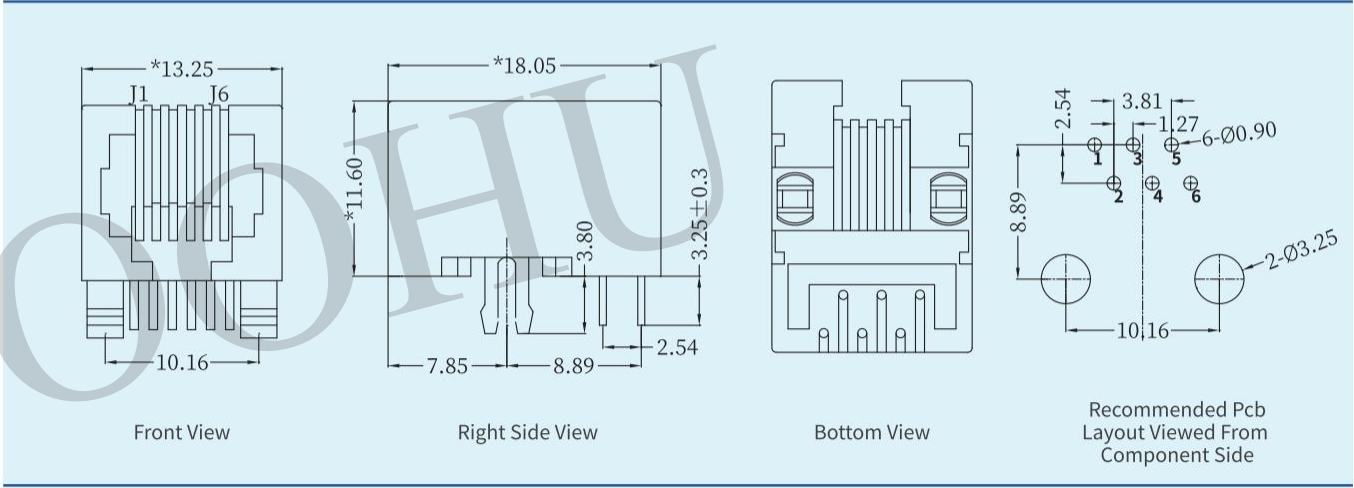


产品料号P/N:SYT53211166IWA1DB1
产品规格Specifications:
类型Type: RJ12 connector
卡口方向Latch: Tab Down
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: T=0.35mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

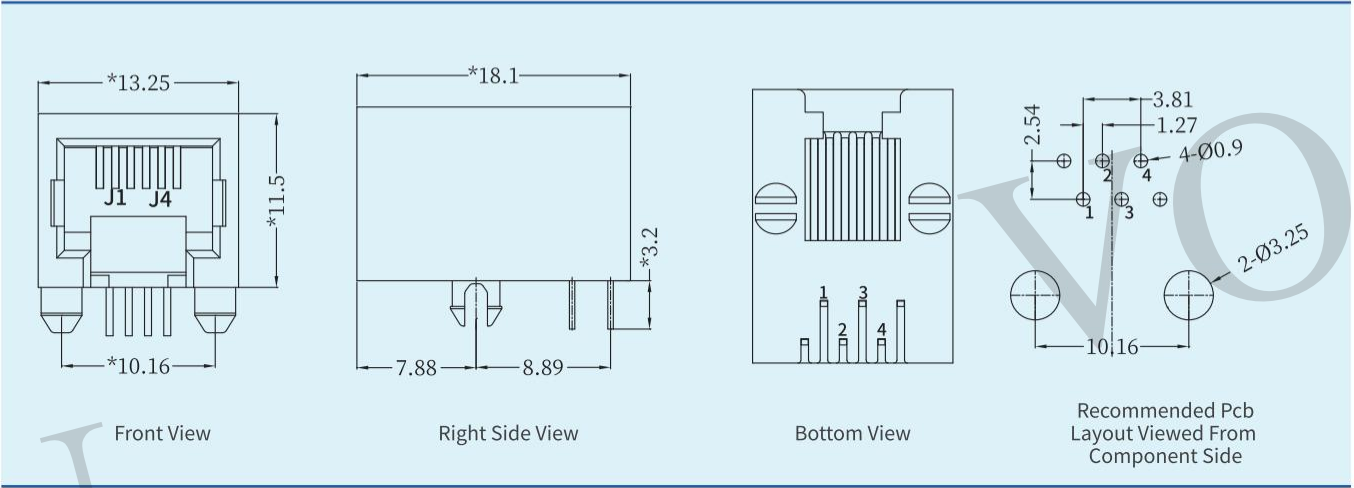

产品料号P/N:SYT53211188IWA1DB1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: T=0.35mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

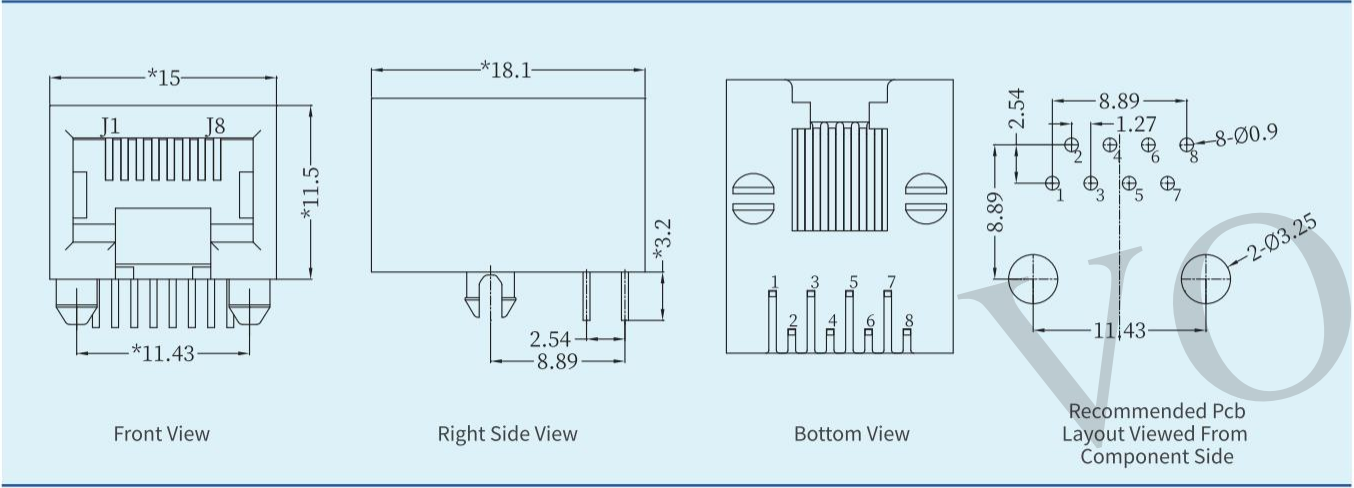




产品料号P/N:SYT53211188IWA3DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

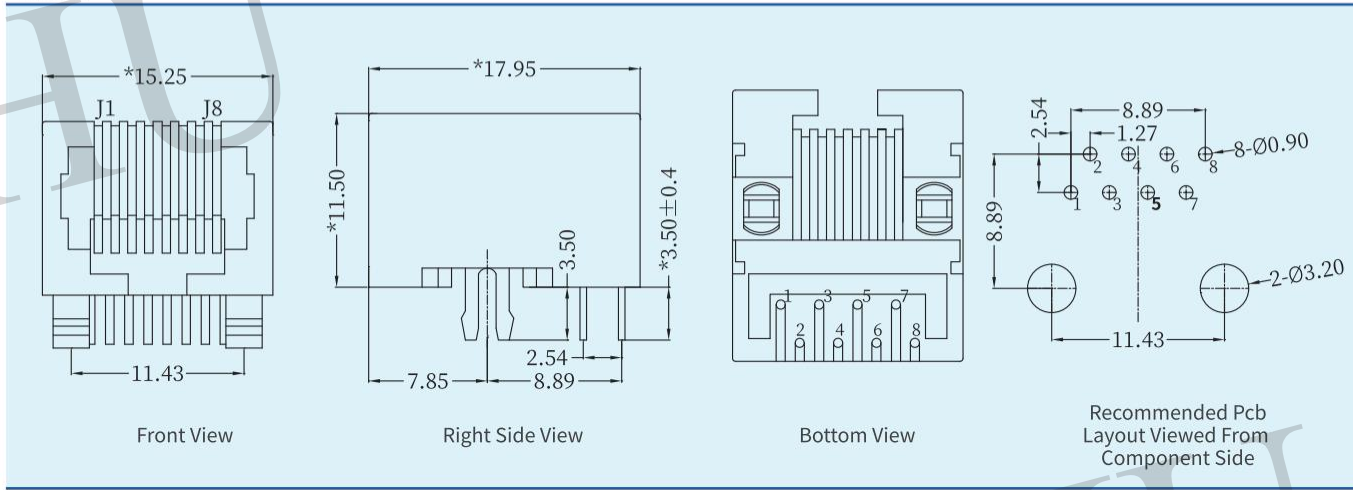


产品料号P/N:SYT53241166IWA1DY1
产品规格Specifications:
类型Type: RJ12 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

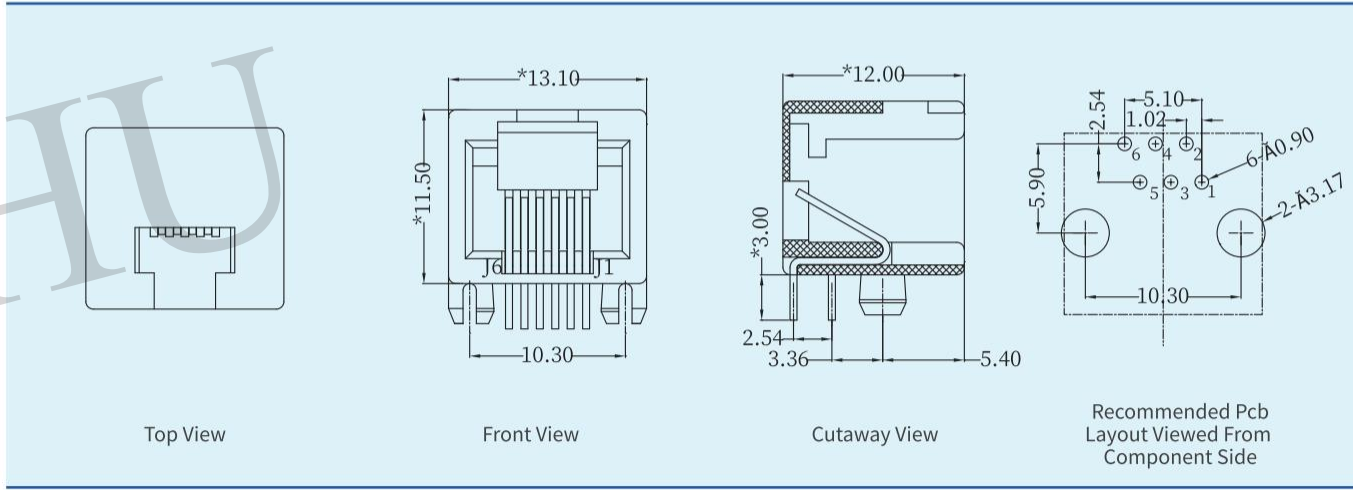


产品料号P/N:SYT53241164IWA1D1
产品规格Specifications:
类型Type: RJ12 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

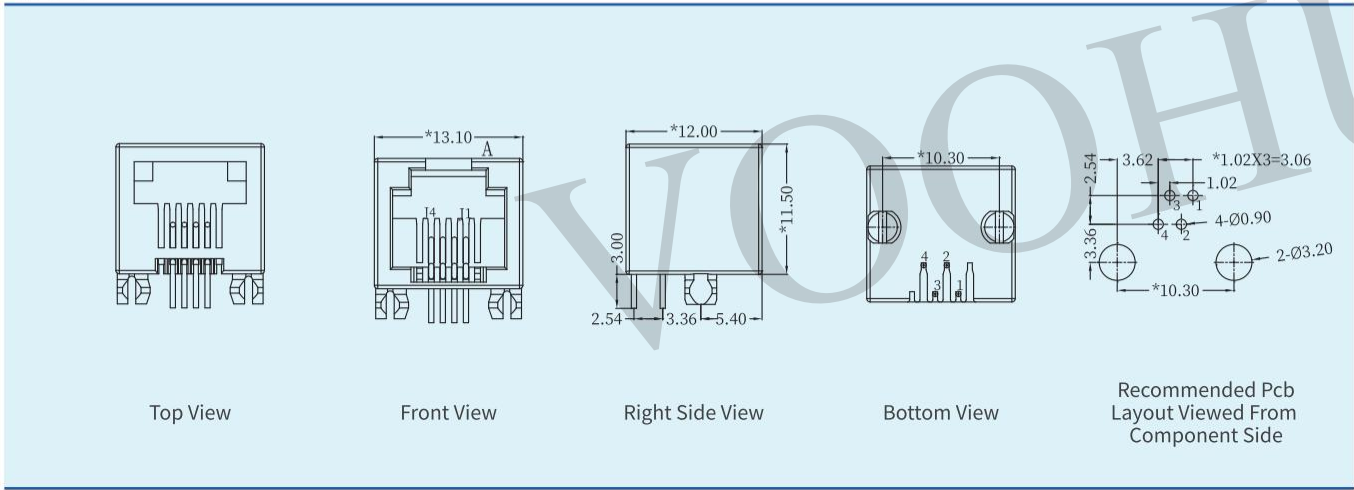

产品料号P/N:SYT53241188IWA1DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL



结构图:

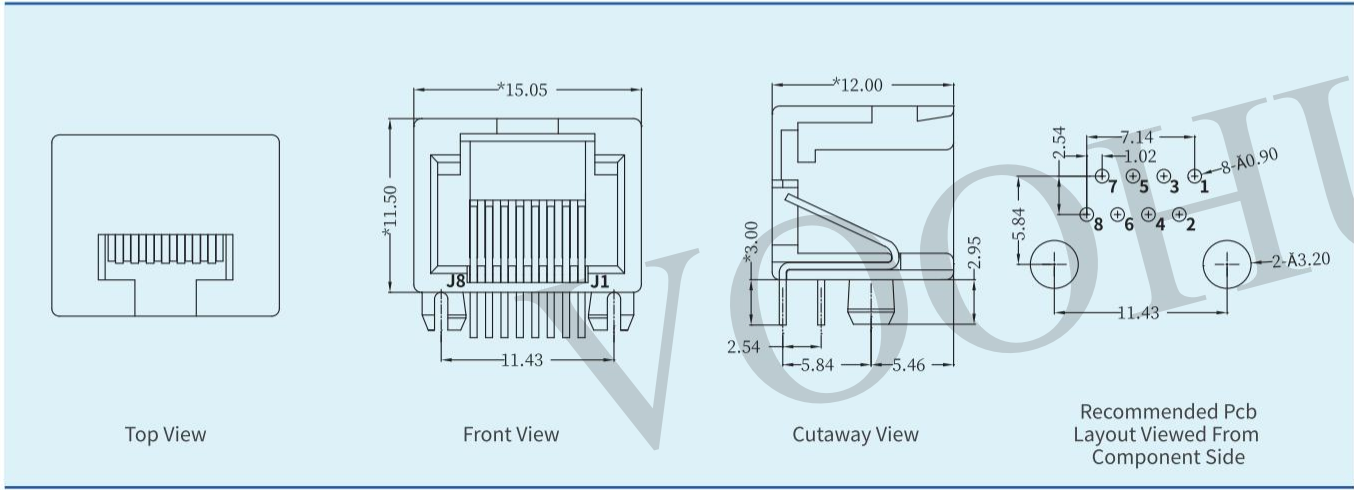





产品料号P/N:SYT53211266IWA1DY4
产品规格Specifications:
类型Type: RJ12 connector
卡口方向Latch: Tab Down
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

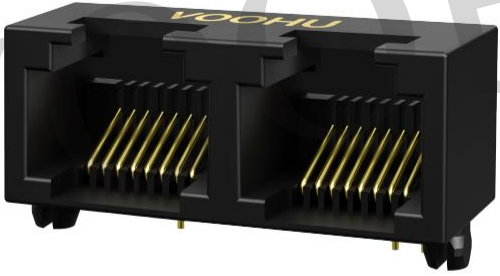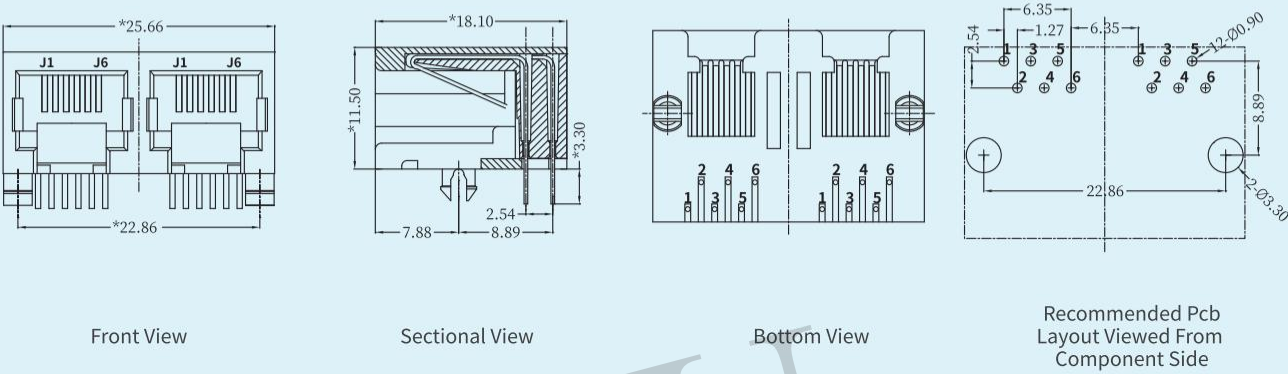



产品料号P/N:SYT53241288IWA1DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

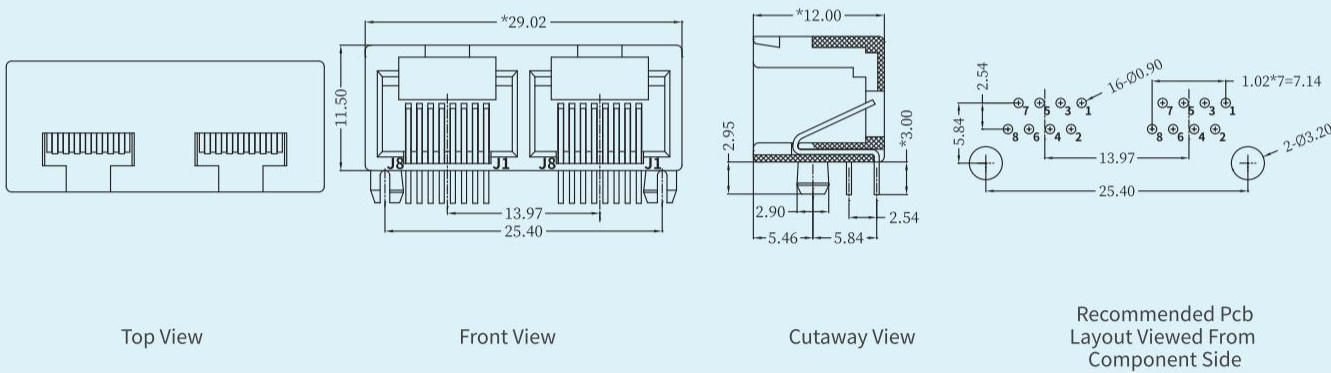


产品料号P/N:SYT5523E1144IWA1DY1
产品规格Specifications:
类型Type: RJ11 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

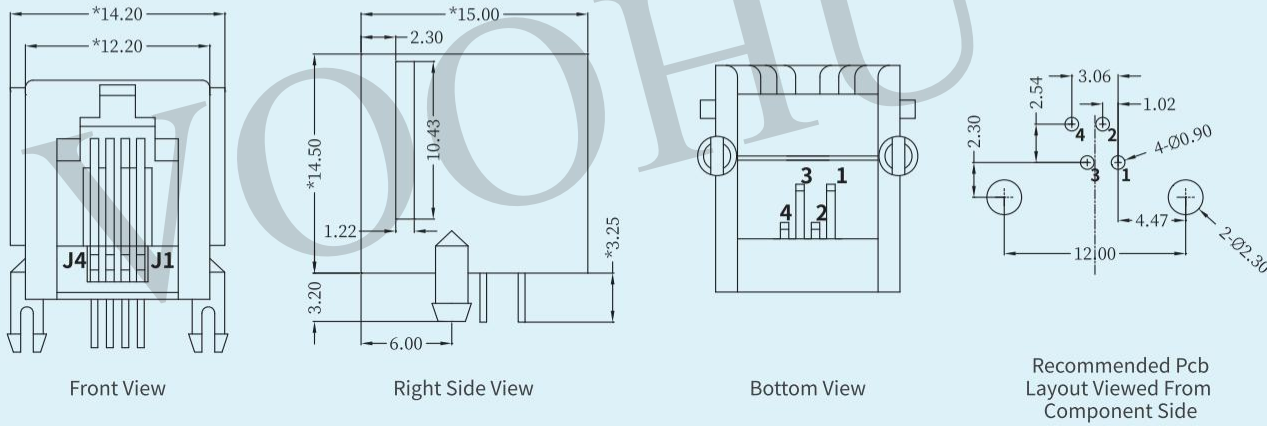

产品料号P/N:SYT55231166IWA1DY1
产品规格Specifications:
类型Type: RJ12 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

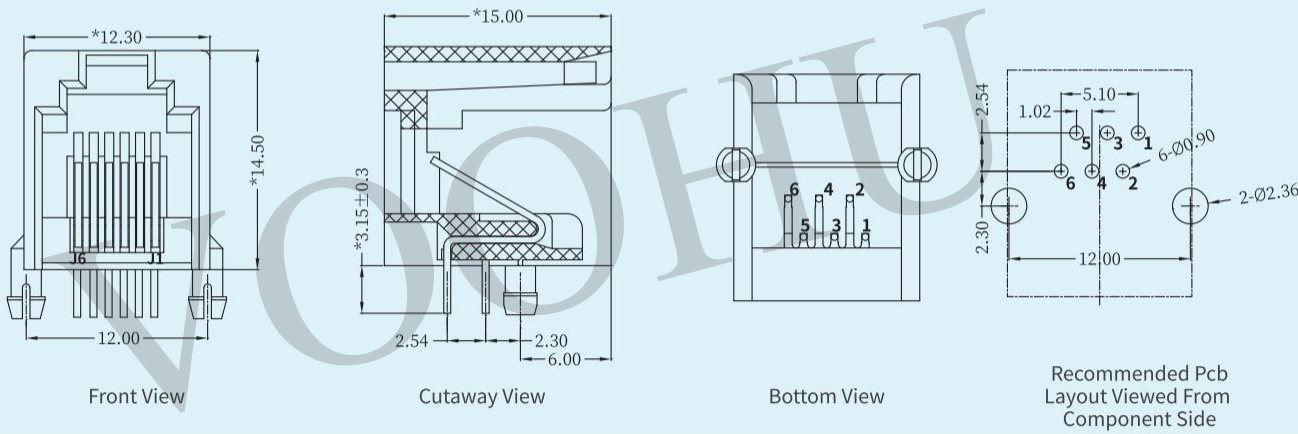

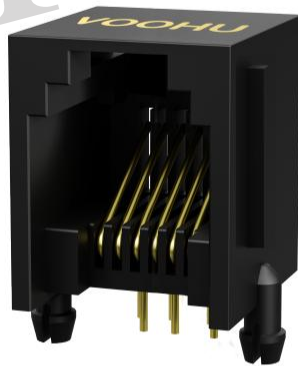

产品料号P/N:SYT5523E1166IWA1DY4

产品规格Specifications:

类型Type: RJ12 connector

卡口方向Latch: Tab Up

是否带灯With LED: No

是否带金属壳With shielding: No

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

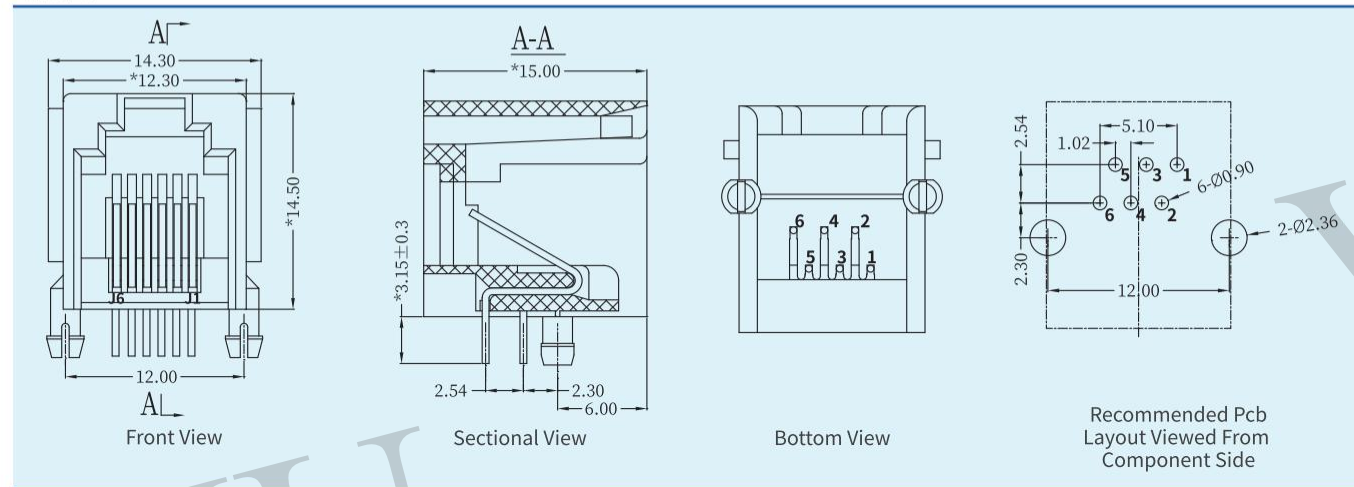

产品料号P/N:SYT55211166IWA1DY4

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: No

是否带金属壳With shielding: No

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50



Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

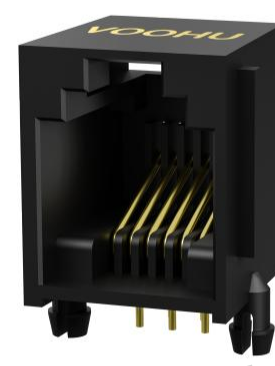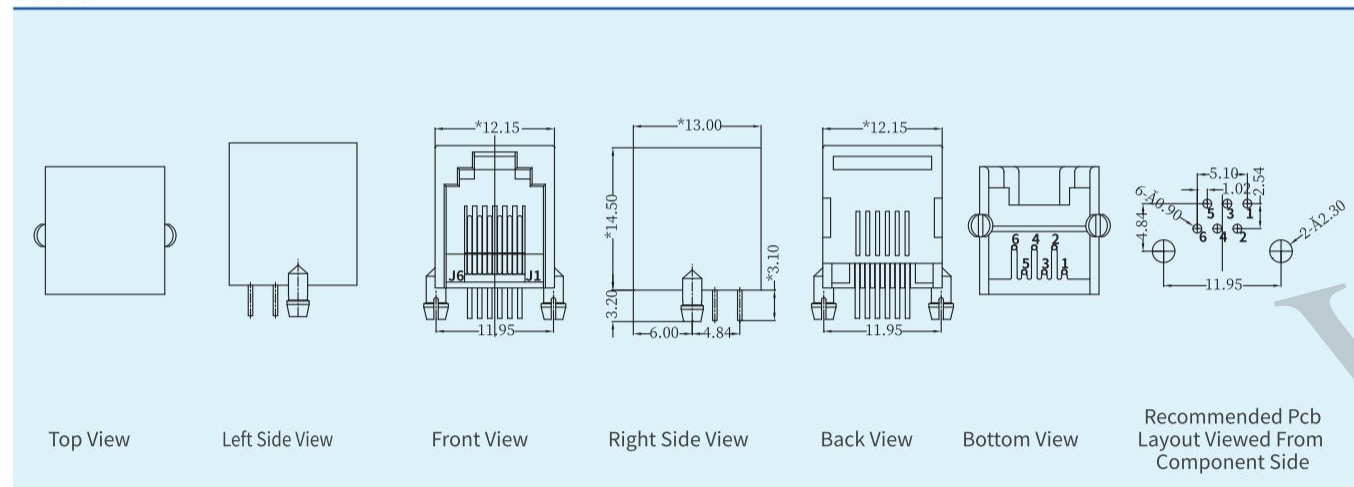

产品料号P/N:SYT5521E1166IWA1DY4

产品规格Specifications:

类型Type: RJ12 connector

卡口方向Latch: Tab Up

是否带灯With LED: No

是否带金属壳With shielding: No

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

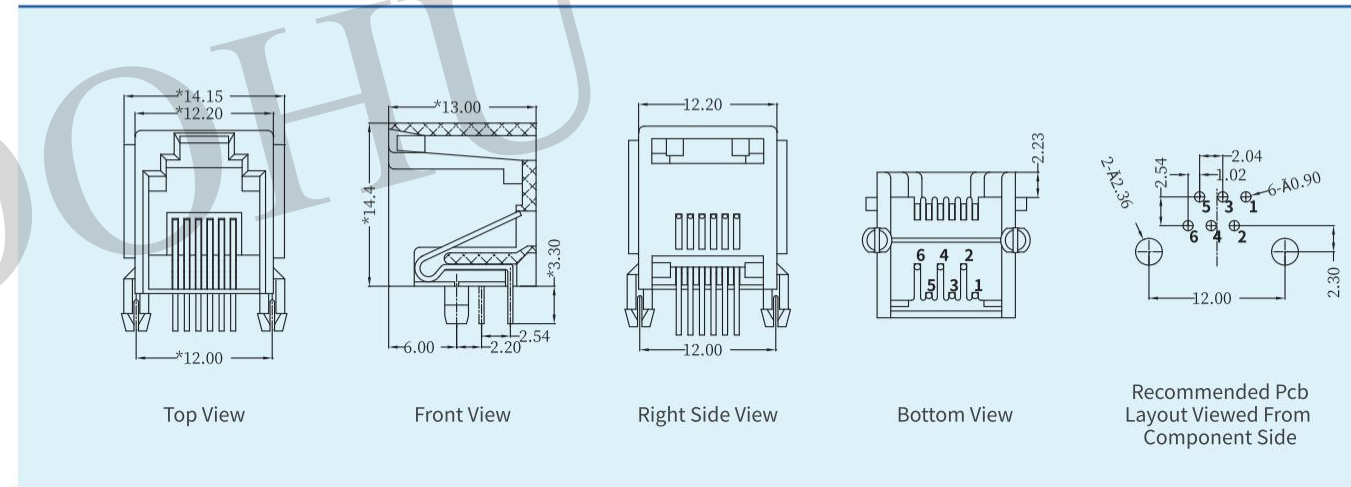

产品料号P/N:SYT55211188IWA1DY1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: No

是否带金属壳With shielding: No

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

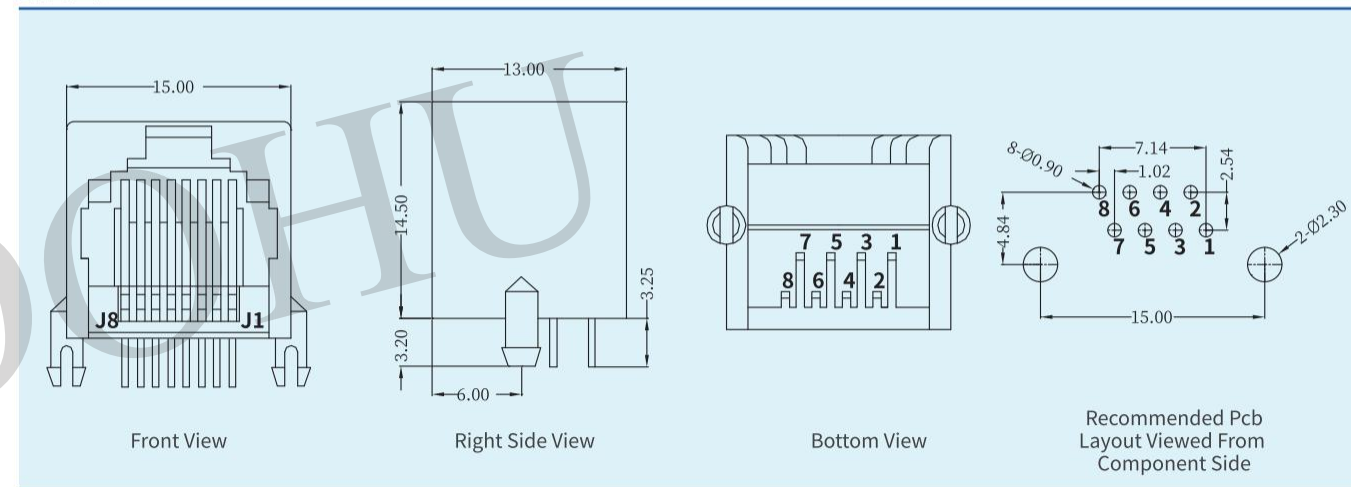




产品料号P/N:SYT5521E1188IWA1D1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

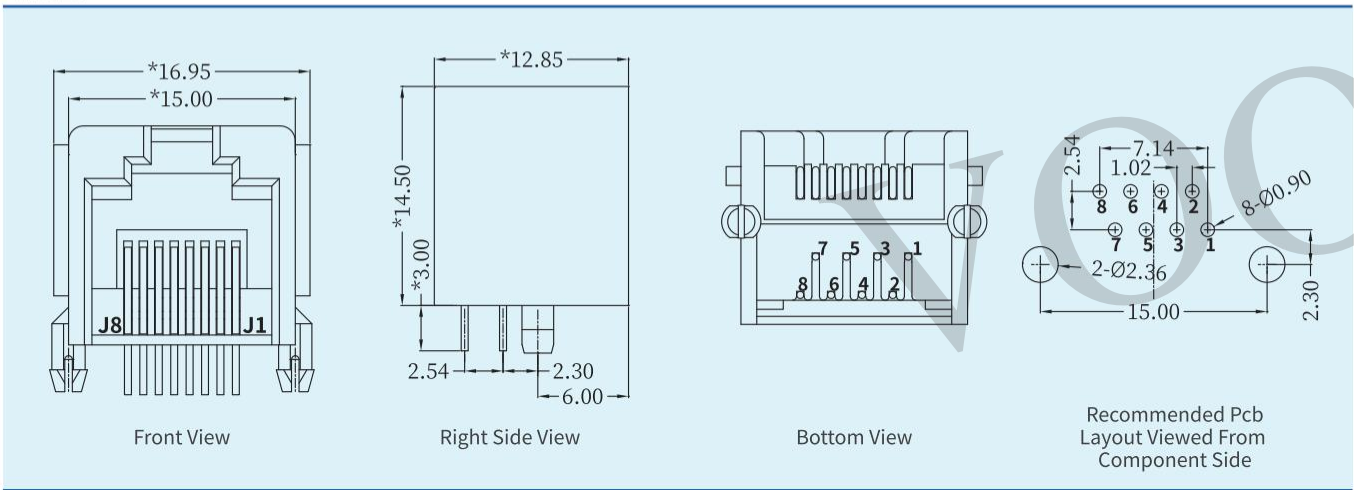


产品料号P/N:SYT5521I1188GWA1DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

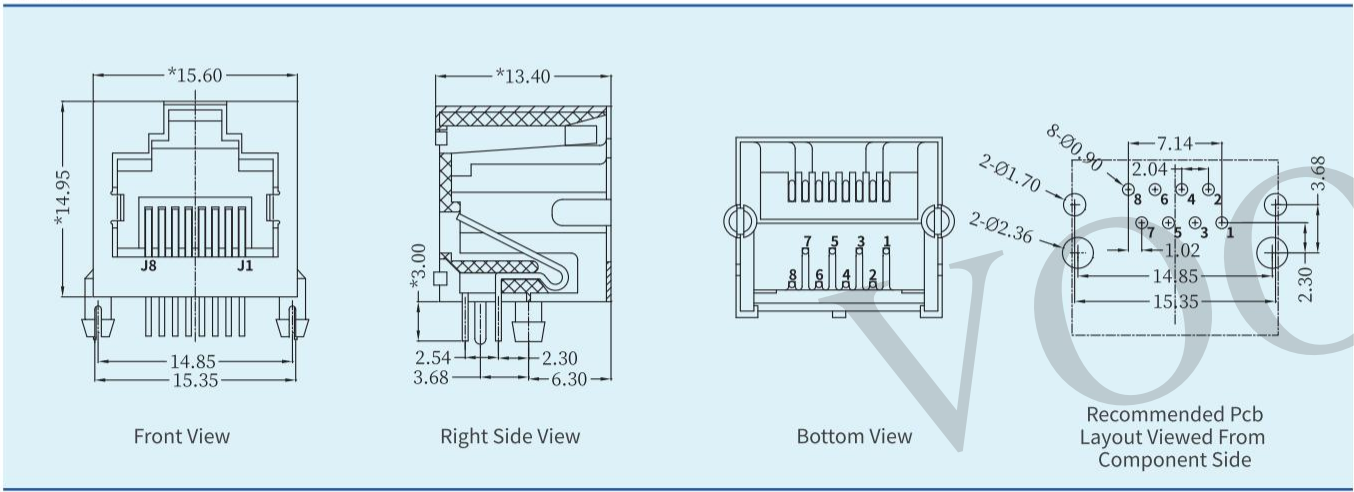


产品料号P/N:SYT5521I264IWA1DY1
产品规格Specifications:
类型Type: RJ12 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

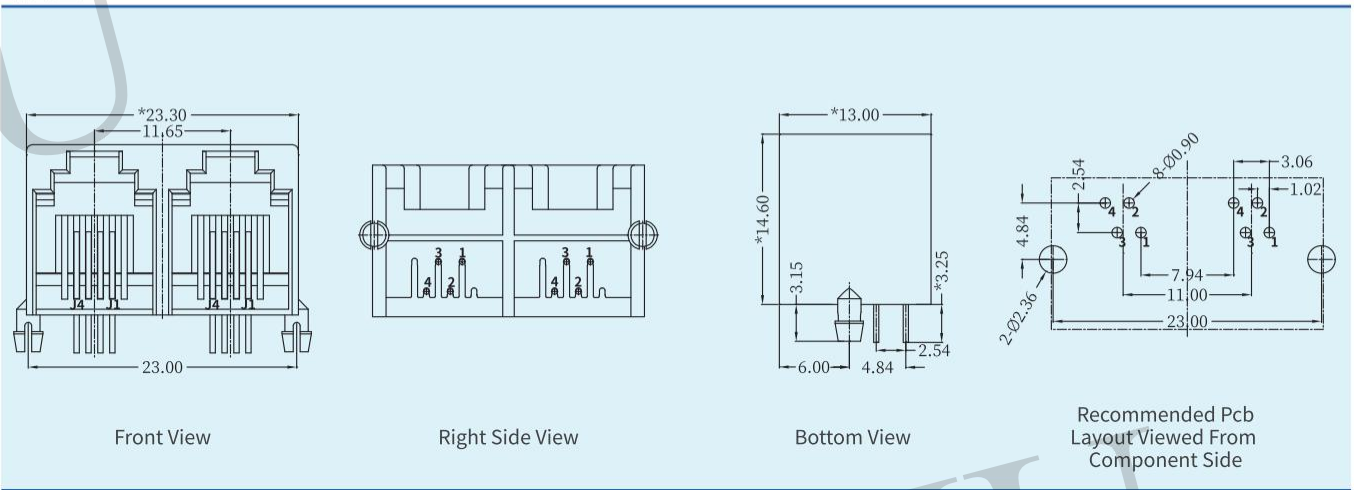

产品料号P/N:SYT5521E1266IWA1DY1
产品规格Specifications:
类型Type: RJ12 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

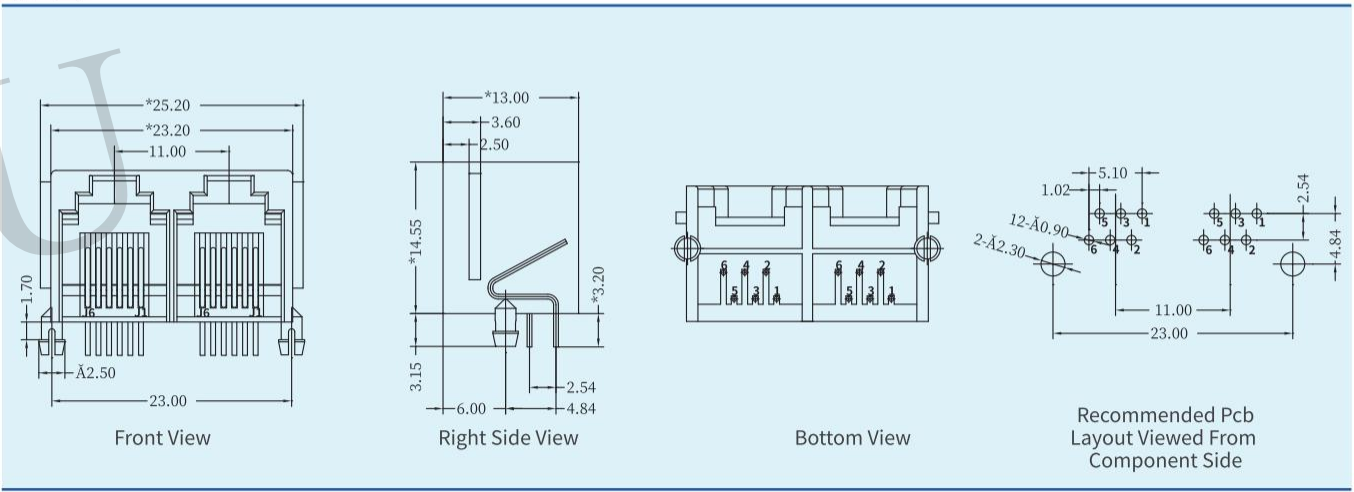



产品料号P/N:SYT55231288IWA1DY1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: No

是否带金属壳With shielding: No

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire


接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50 Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

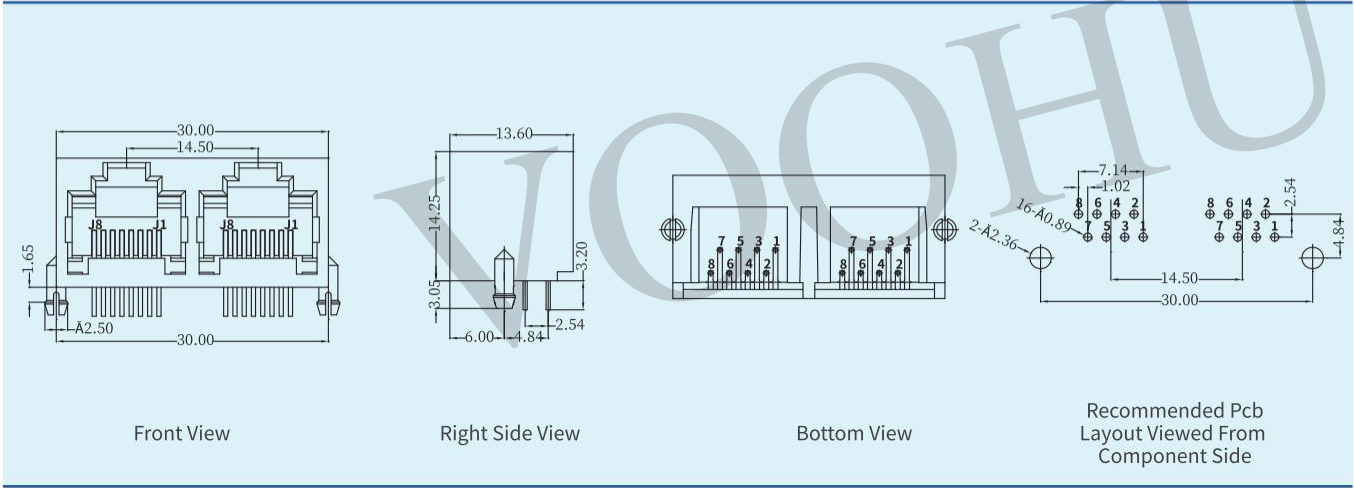

产品料号P/N:SYT55211466IWA1DY1

产品规格Specifications:

类型Type: RJ12 connector

卡口方向Latch: Tab Up

是否带灯With LED: No

是否带金属壳With shielding: No

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire


接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50 Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

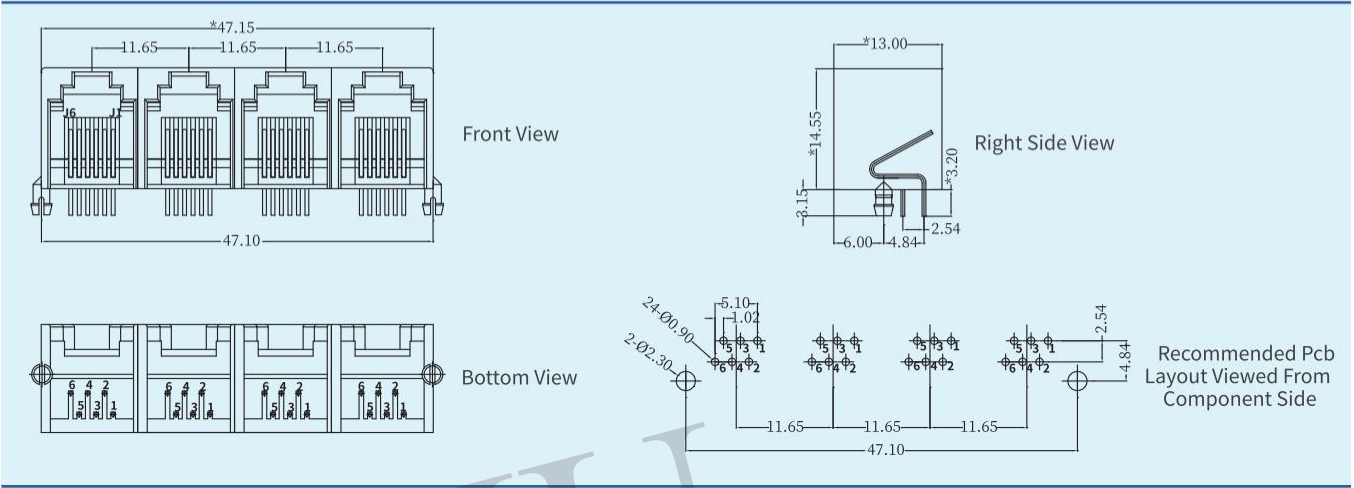

产品料号P/N:SYT5521E1366IWA1DY1

产品规格Specifications:

类型Type: RJ12 connector

卡口方向Latch: Tab Up

是否带灯With LED: No

是否带金属壳With shielding: No

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire


接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50 Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

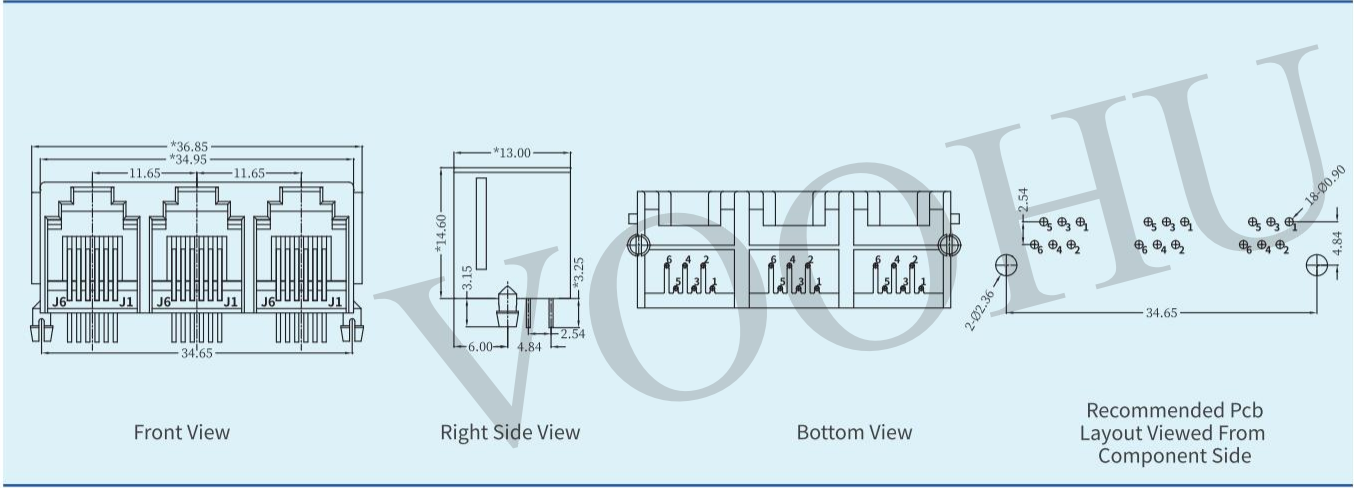

产品料号P/N:SYT55211488IWA1DY1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: No

是否带金属壳With shielding: No

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire


接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50 Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

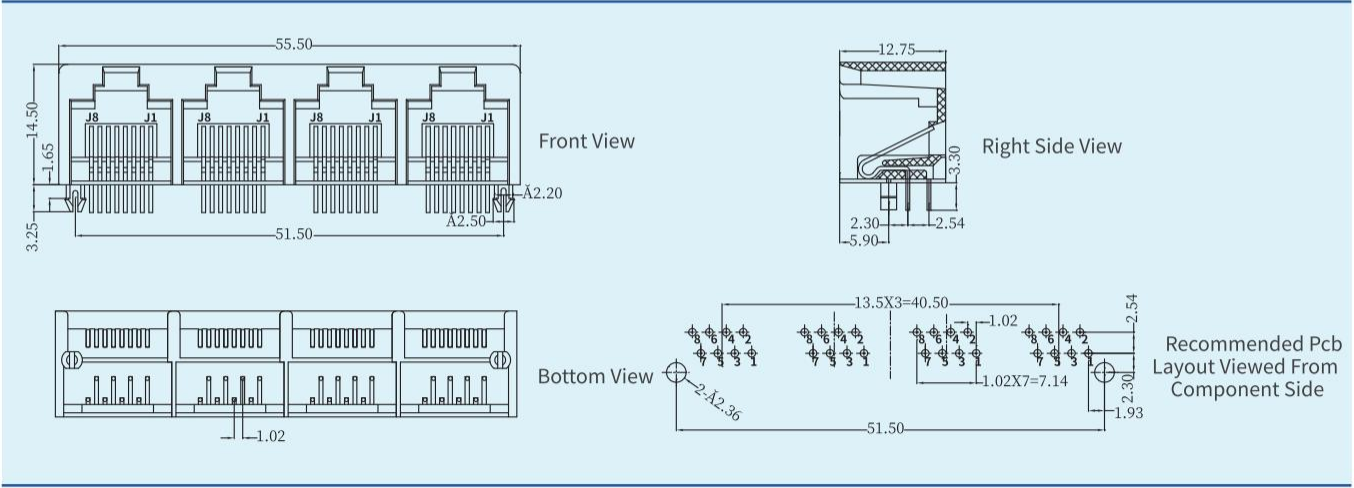




产品料号P/N:SYT561188IWA6SB1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Phosphor bronze
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: SMT
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

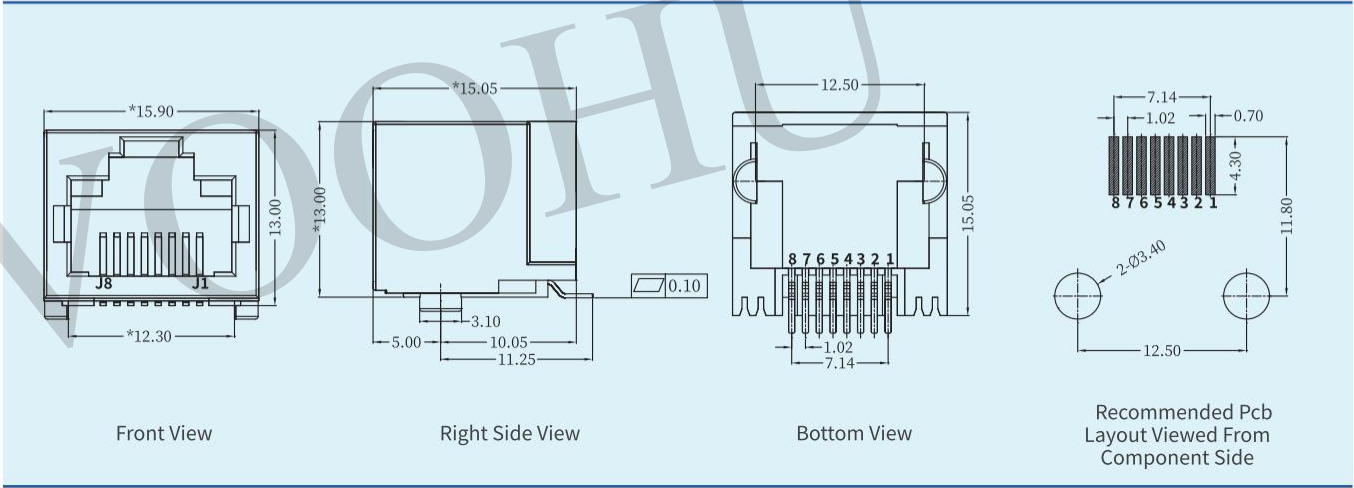



产品料号P/N:SYT5621111IWA6DY5
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

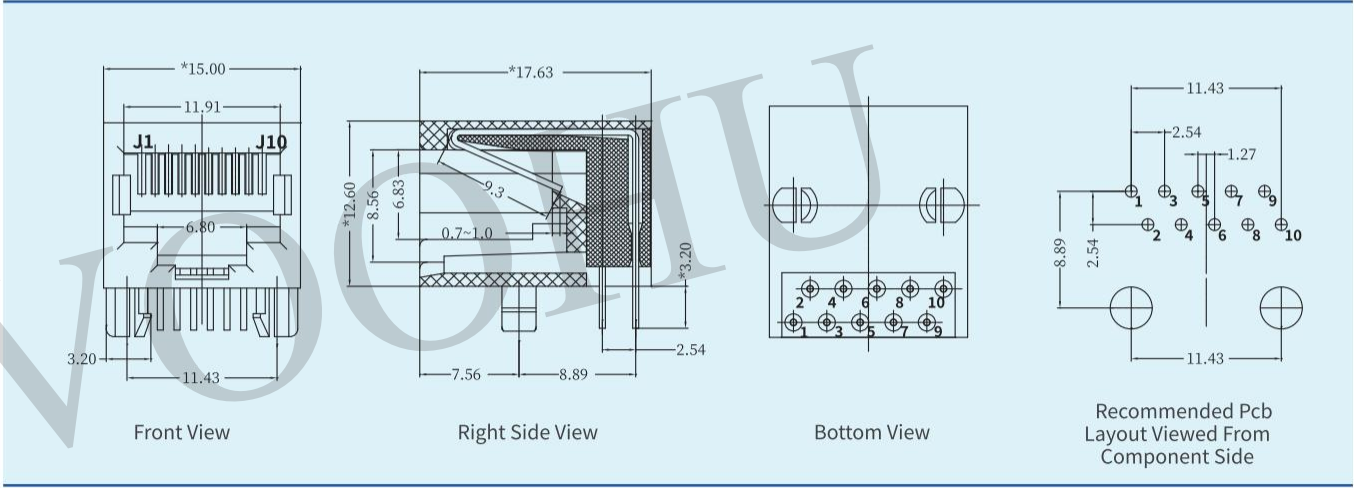


产品料号P/N:SYT56311188IWA1DY7
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

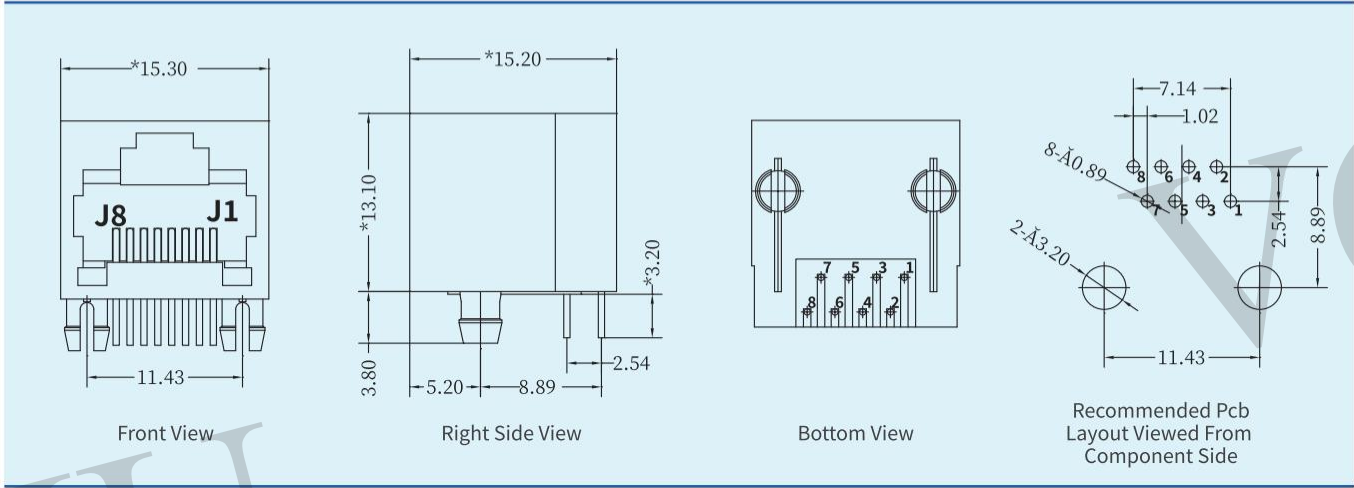

产品料号P/N:SYT561188IWA1DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

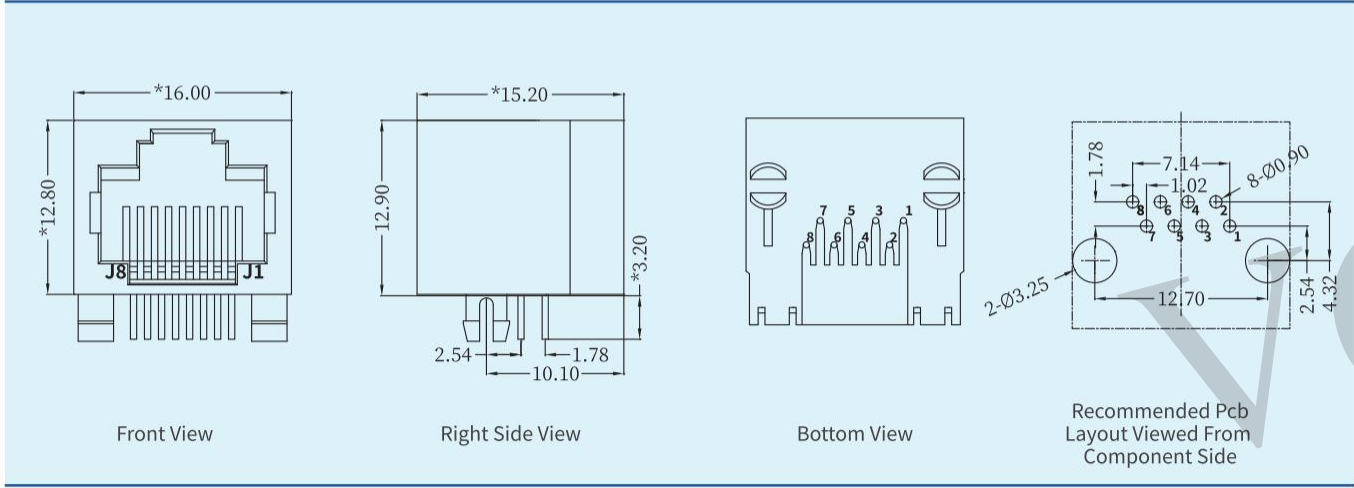




产品料号P/N:SYT561188JB1A1DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: Yes, L-Yellow / R-Green
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

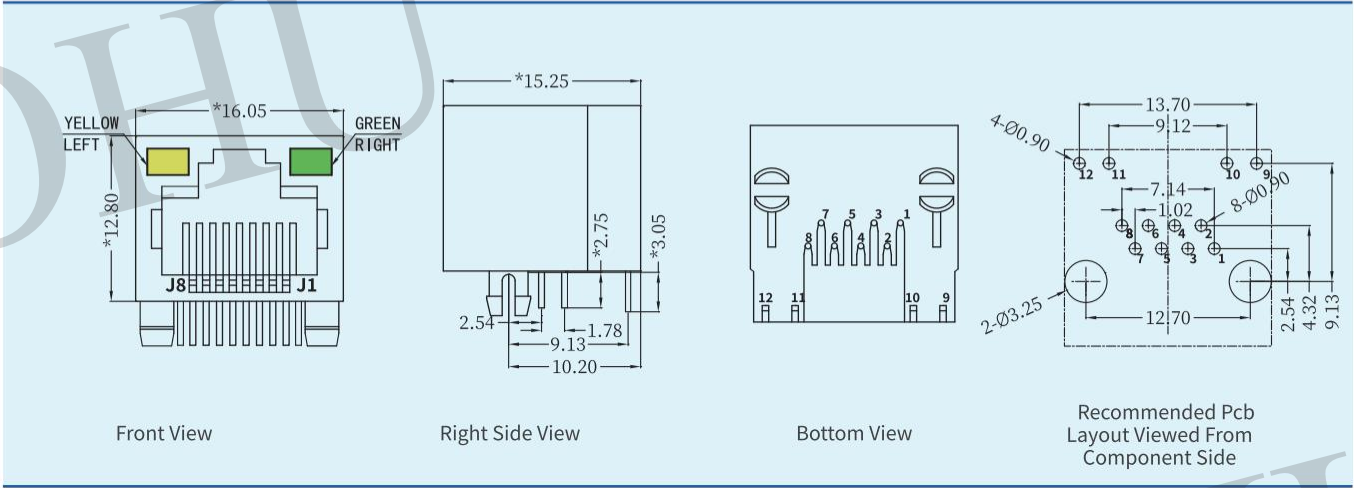


产品料号P/N:SYT56211166GWA1D1Y1
产品规格Specifications:
类型Type: RJ12 connector
卡口方向Latch: Tab Down
是否带灯With LED: No
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

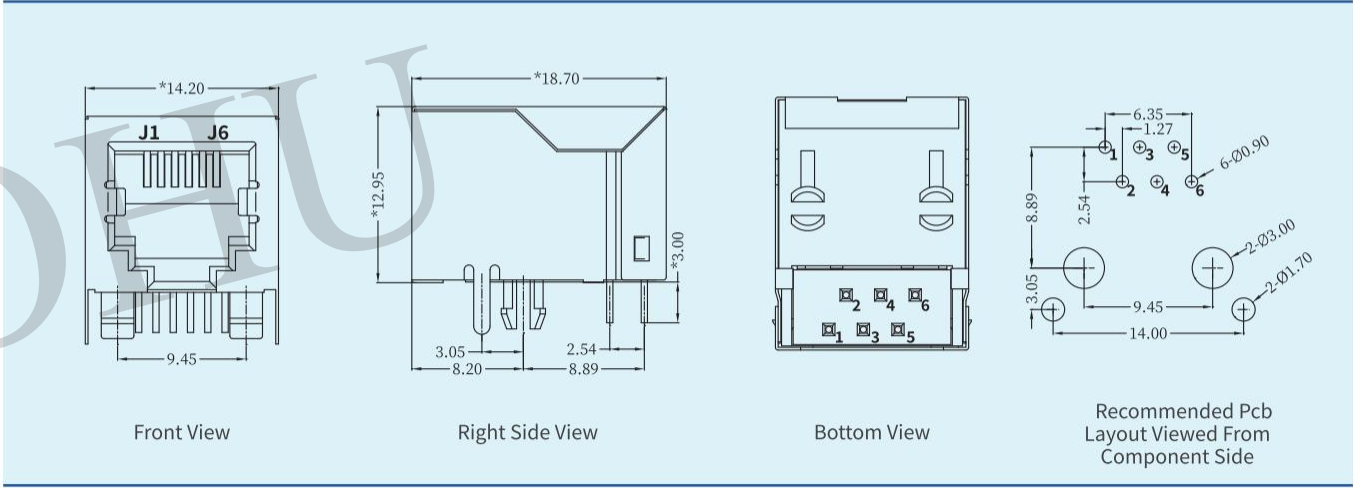


产品料号P/N:SYT56211118GWA1DBZ
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
是否带灯With LED: No
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

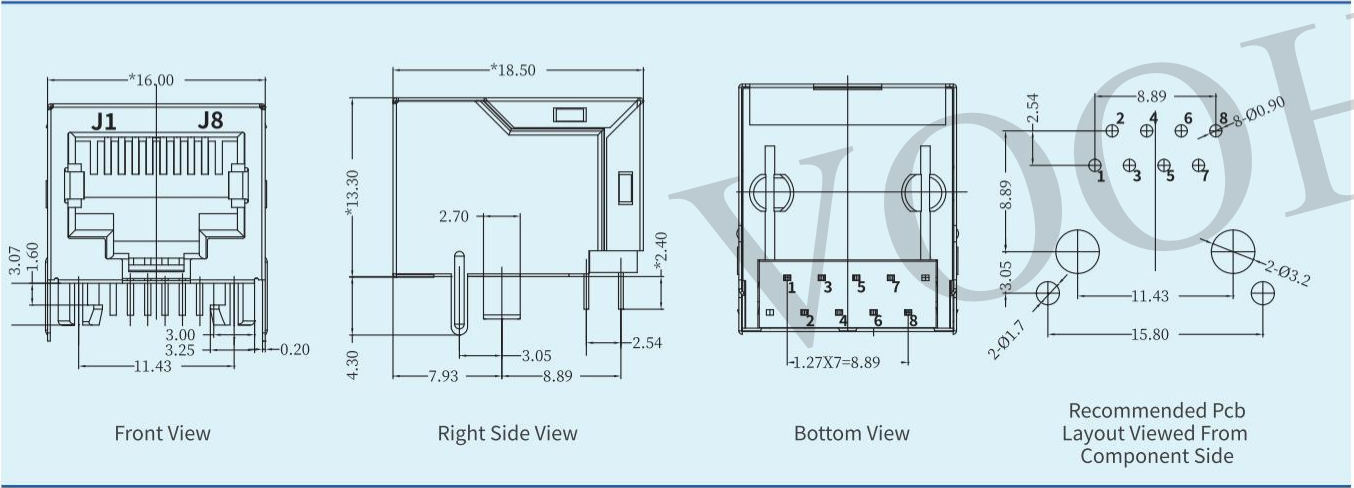

产品料号P/N:SYT561188GWA1DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

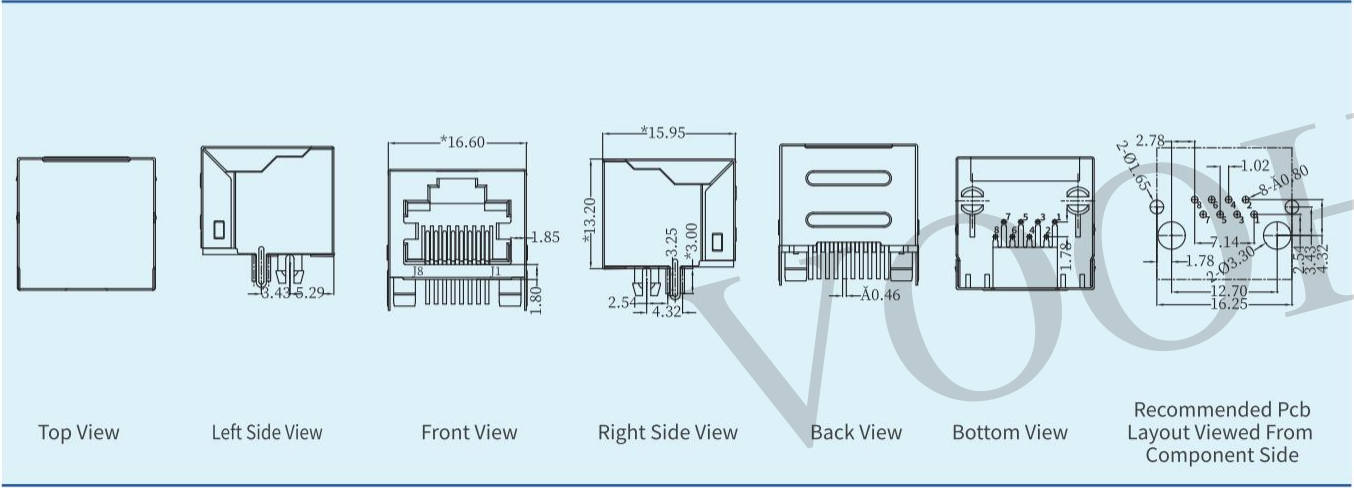




产品料号P/N:SYT56221118HWA1D1Y1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
是否带灯With LED: No
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

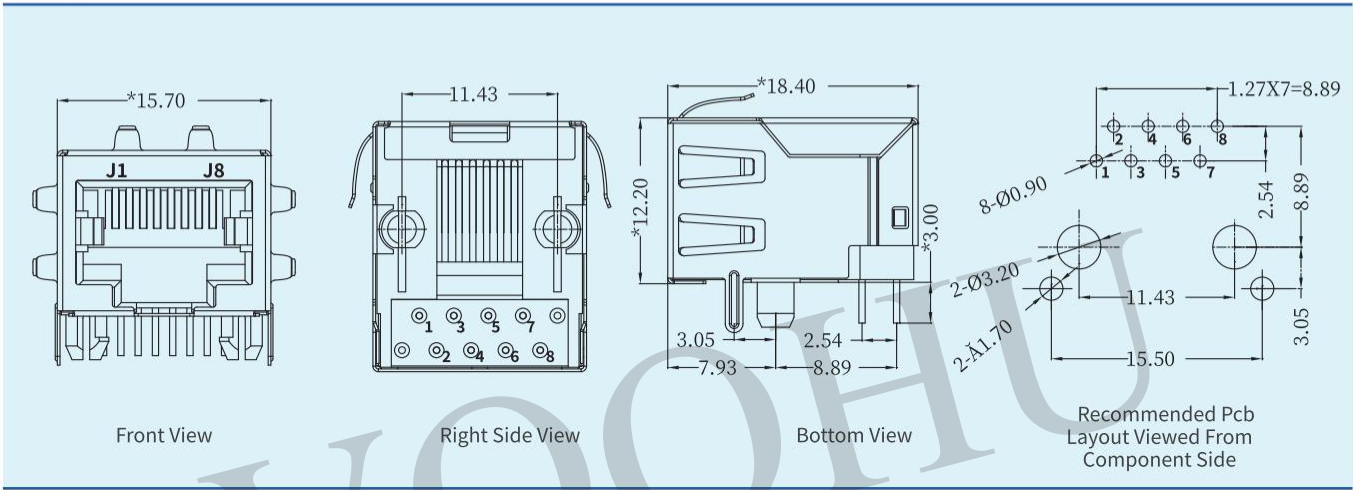


产品料号P/N:SYT561188HWA1DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

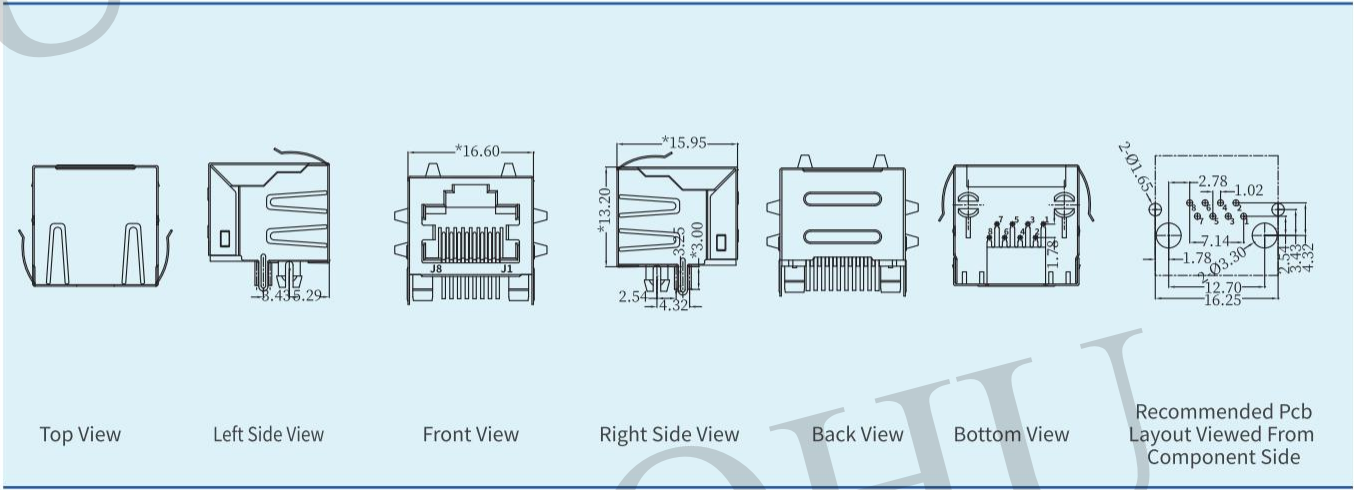


产品料号P/N:SYT561188AB1A1DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: Yes, L-Yellow / R-Green
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

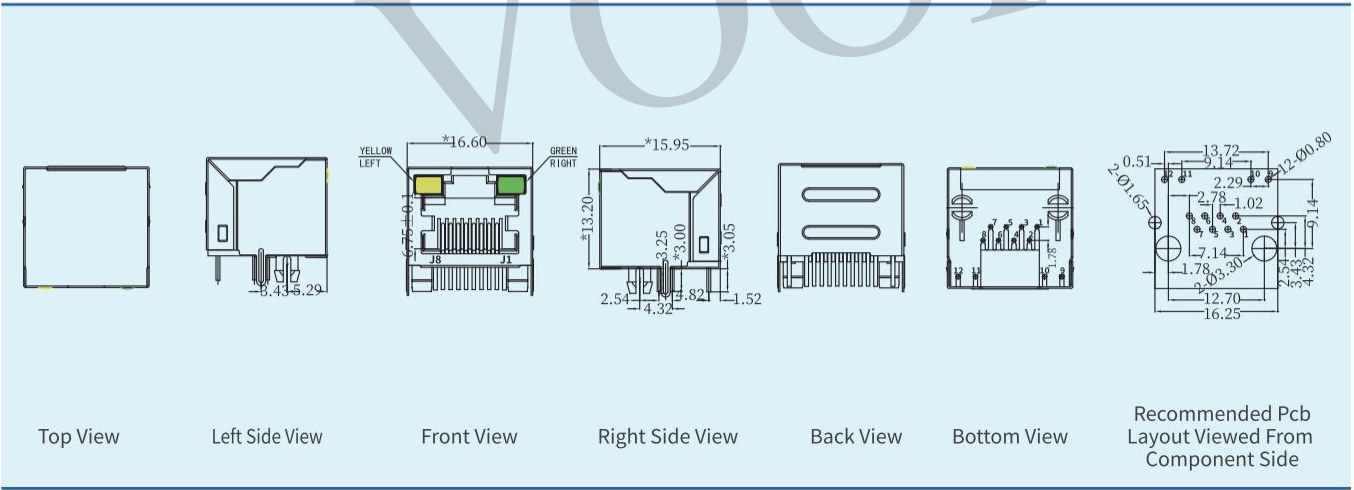

产品料号P/N:SYT56A1188AB1A3DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
是否带灯With LED: Yes, L-Yellow / R-Green
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

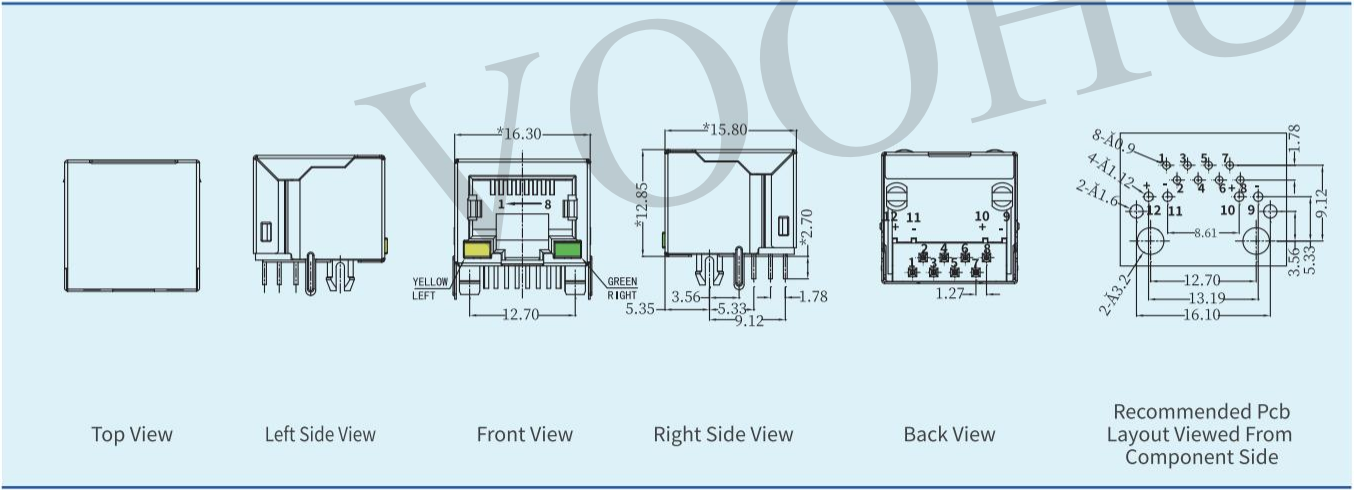



产品料号P/N:SYT561188DB1A1DY5

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: Yes, L-Yellow / R-Green

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

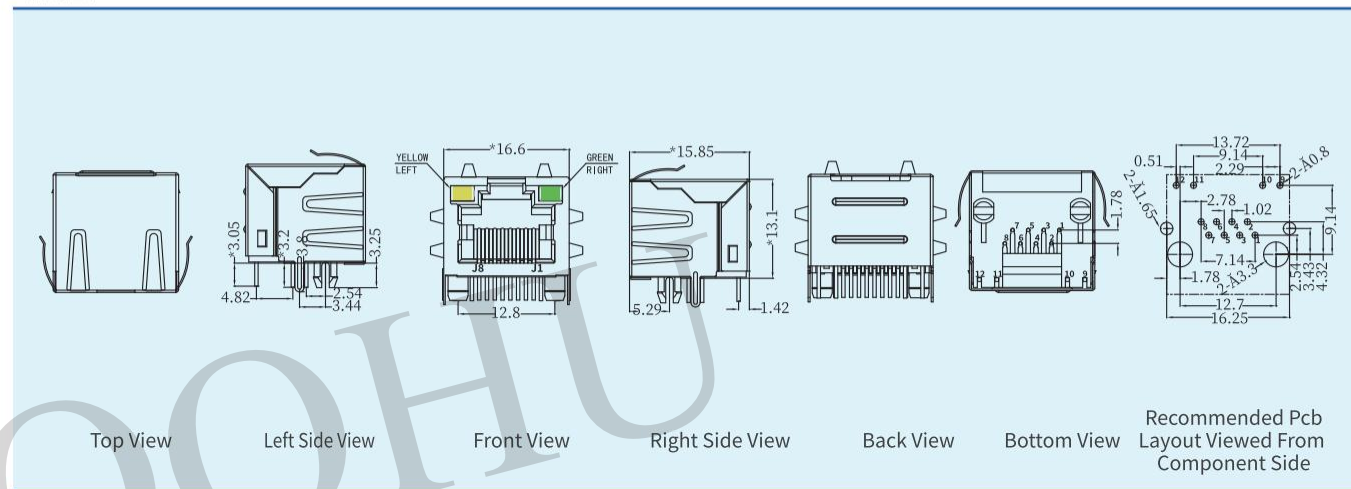

产品料号P/N:SYT56A1188DB1A3DY1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

是否带灯With LED: Yes, L-Yellow / R-Green

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

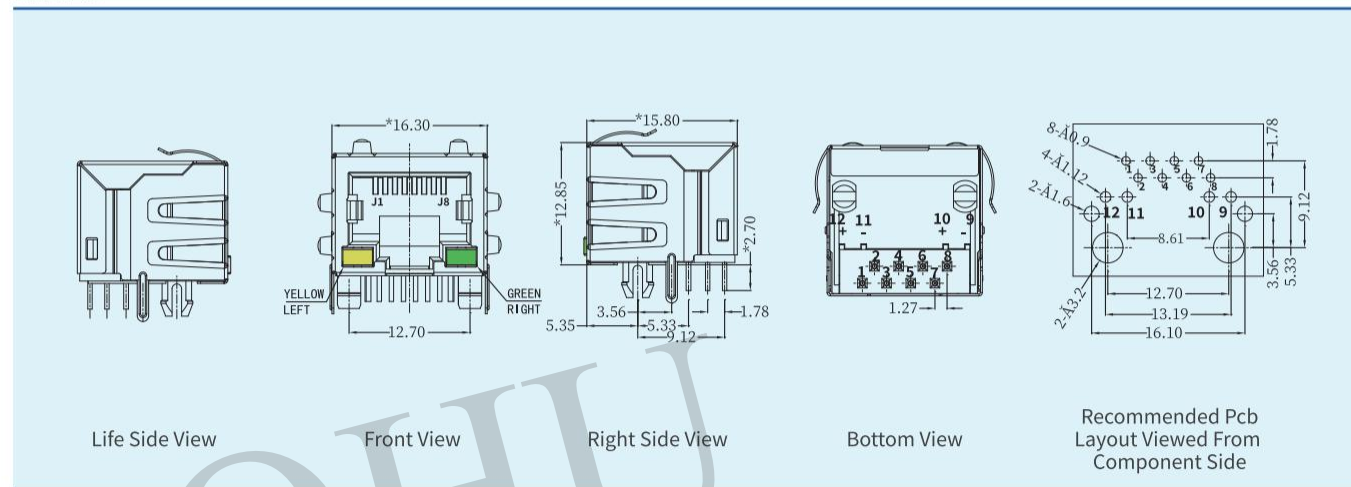

产品料号P/N:SYT561188AB1A6SB1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: Yes, L-Yellow / R-Green

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Phosphor bronze

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: SMT

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

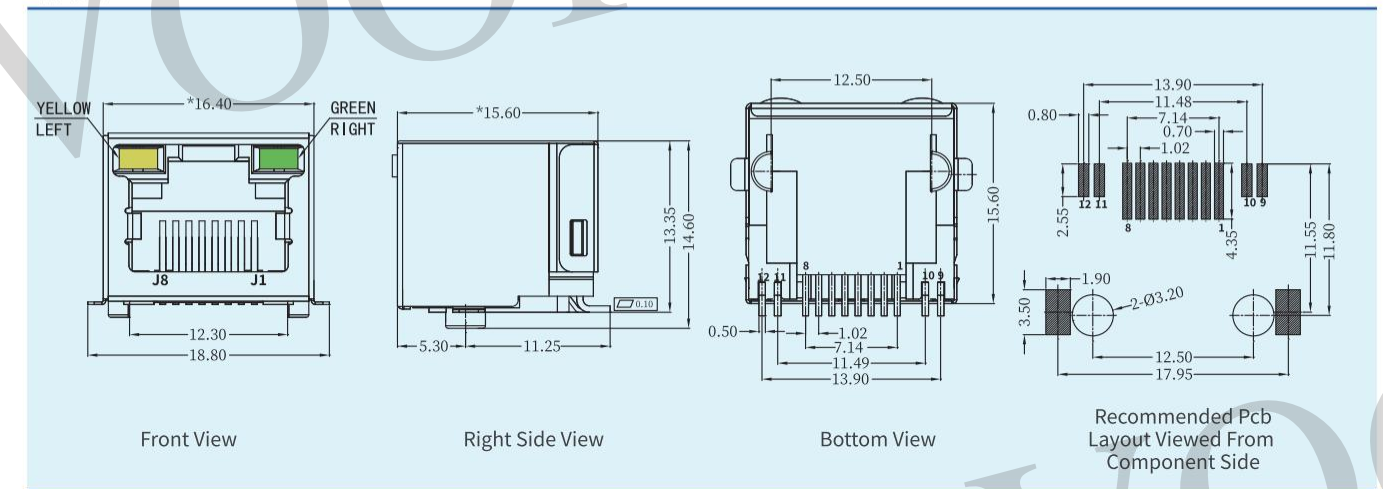

产品料号P/N:SYT561188DB1A6SB1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: Yes, L-Yellow / R-Green

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Phosphor bronze

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: SMT

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

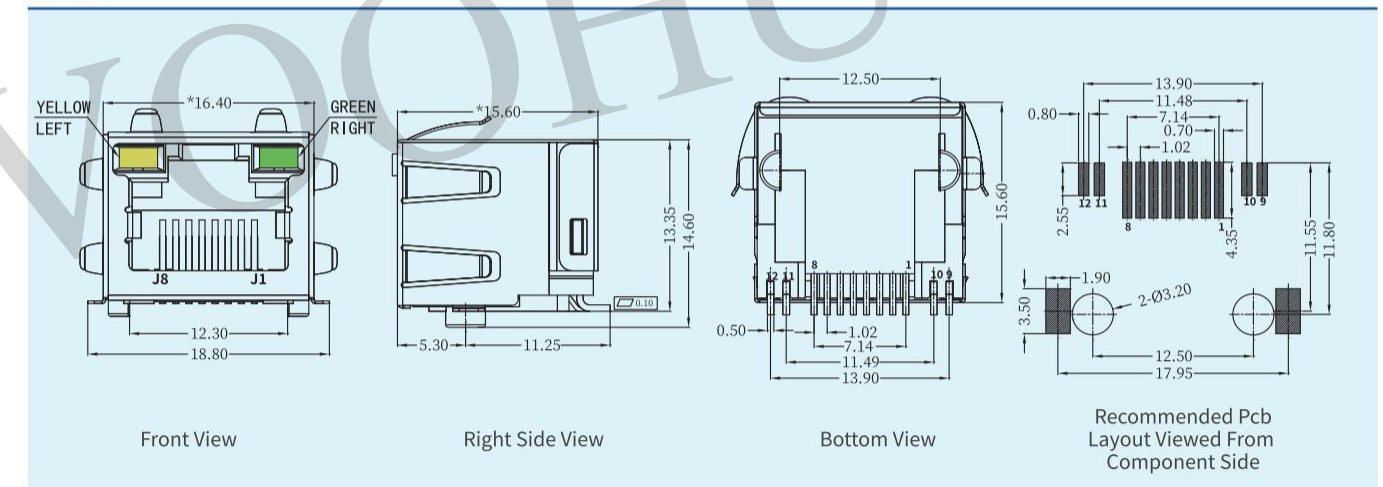



产品料号P/N:SYT561218GWA6SB9

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: No

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Phosphor bronze

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: SMT

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

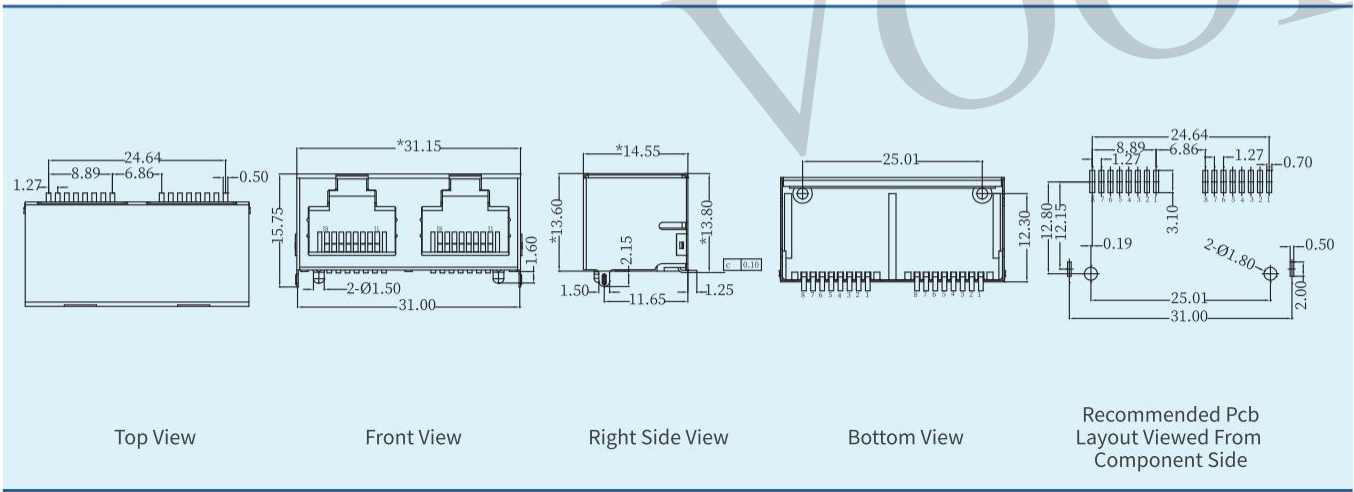

产品料号P/N:SYT561288HWA3DY1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: No

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

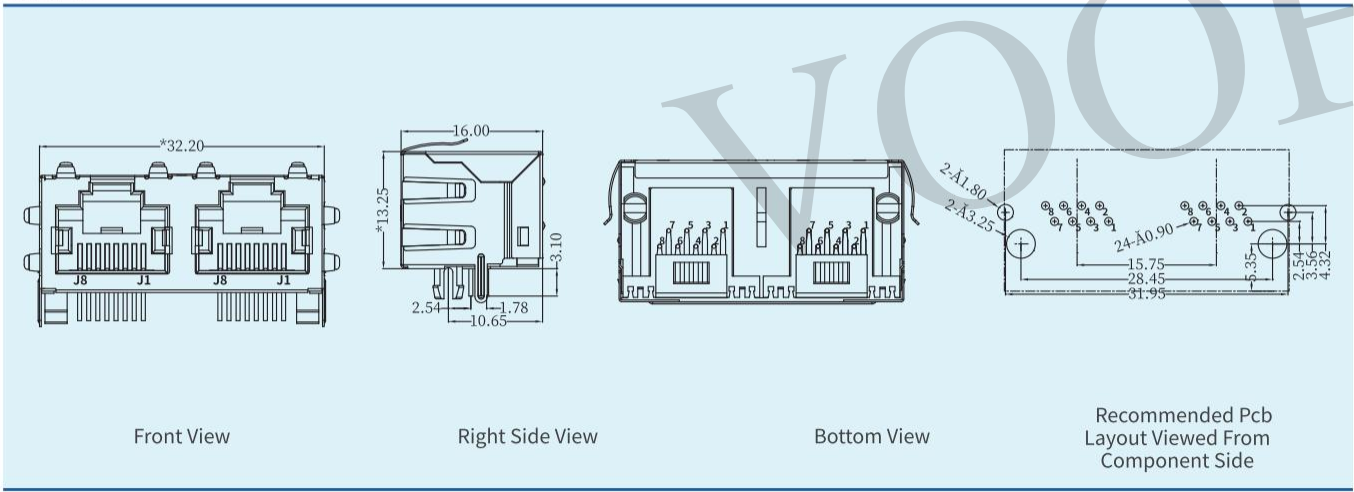

产品料号P/N:SYT561288AB1A3DY1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: Yes, L-Yellow / R-Green

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

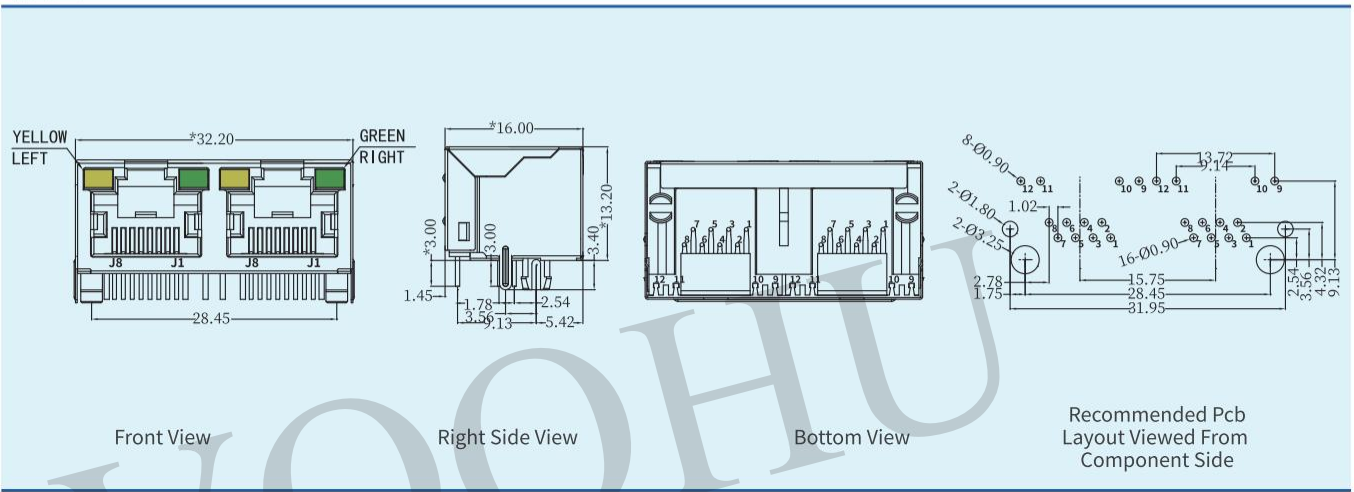

产品料号P/N:SYT561288DB2A1DY1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: Yes, L-Green / R-Yellow

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

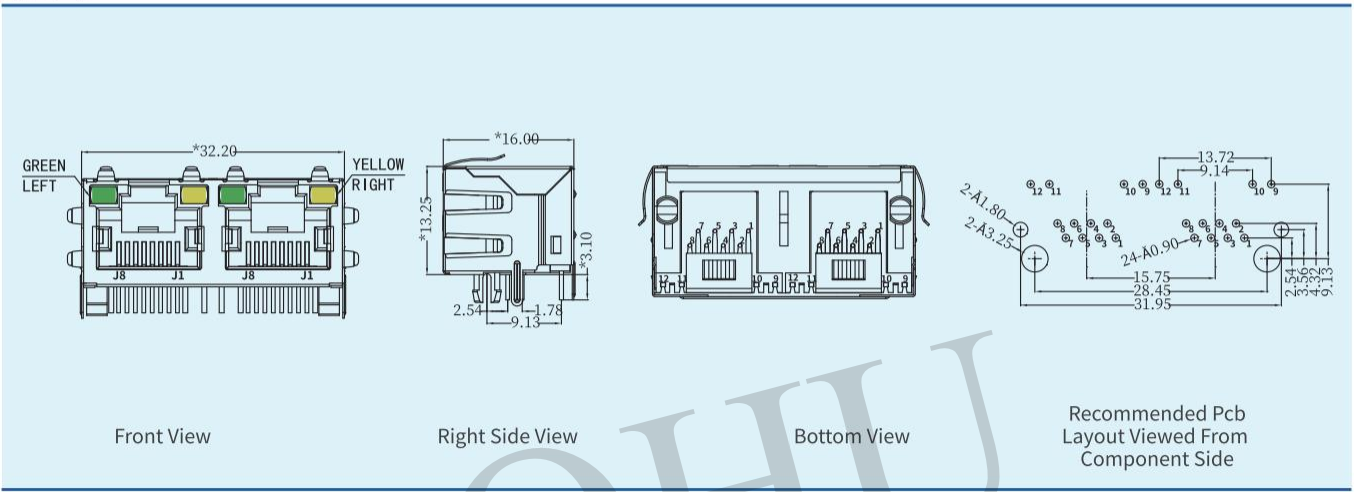



产品料号P/N:SYT561388JB1A1DY1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: Yes, L-Yellow / R-Green

是否带金属壳With shielding: No

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

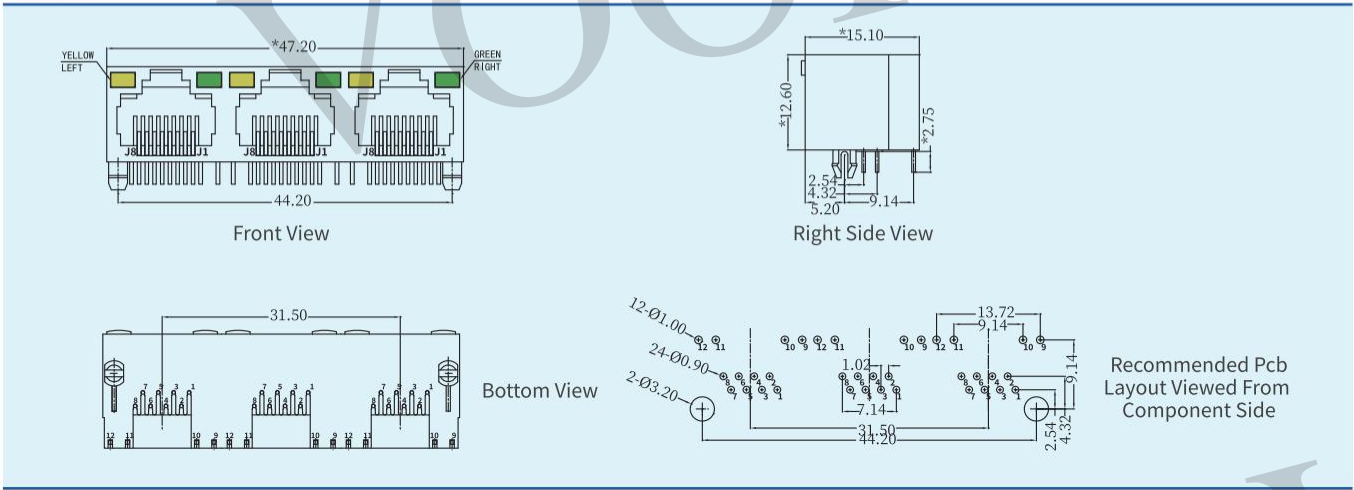

产品料号P/N:SYT56311488IWA1DY1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: No

是否带金属壳With shielding: No

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

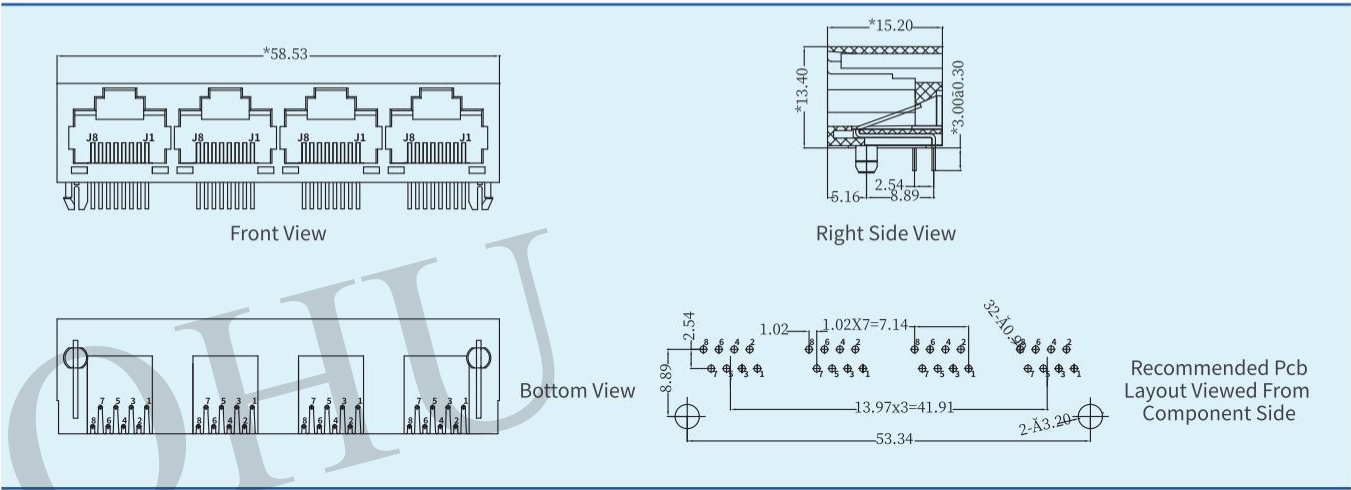

产品料号P/N:SYT561388GWA1DY1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: No

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

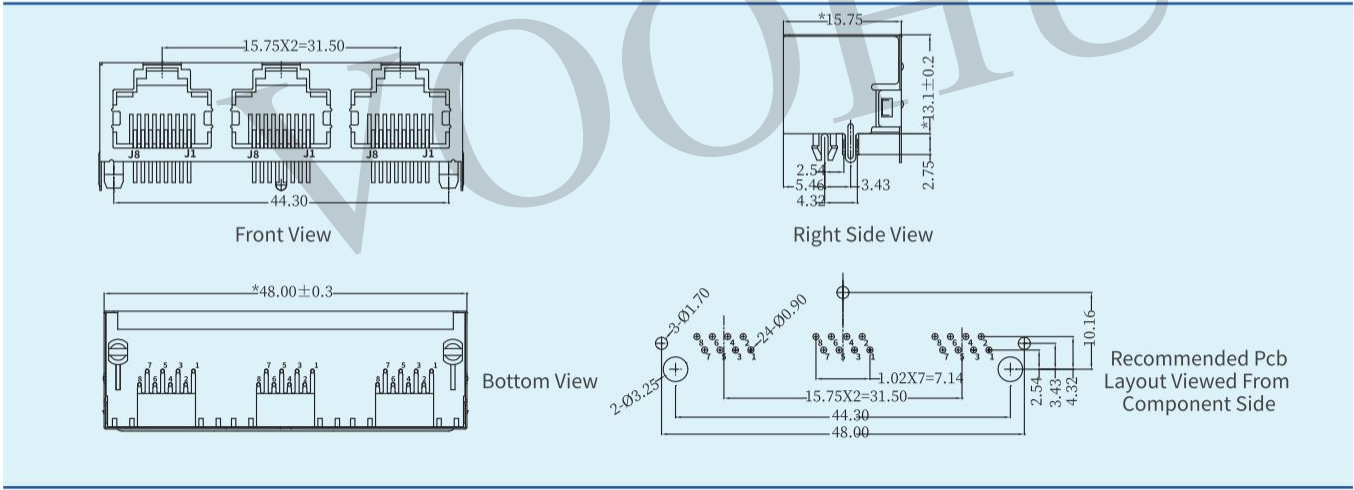

产品料号P/N:SYT56221418GWA1D2Y1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

是否带灯With LED: No

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

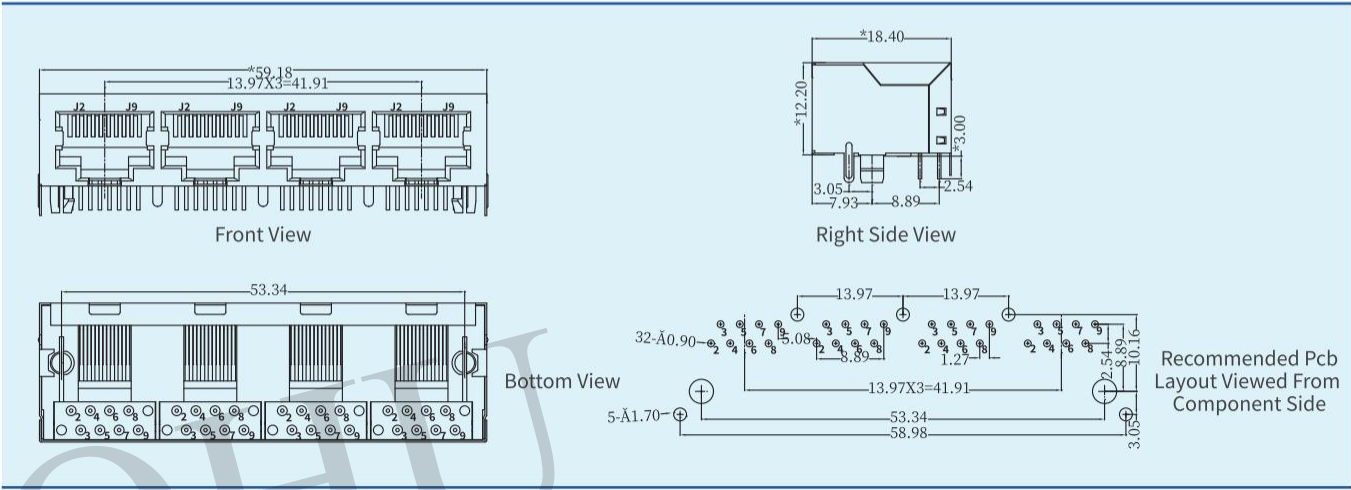



产品料号P/N:SYT561488GWA3DY1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: No

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀 Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度 Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

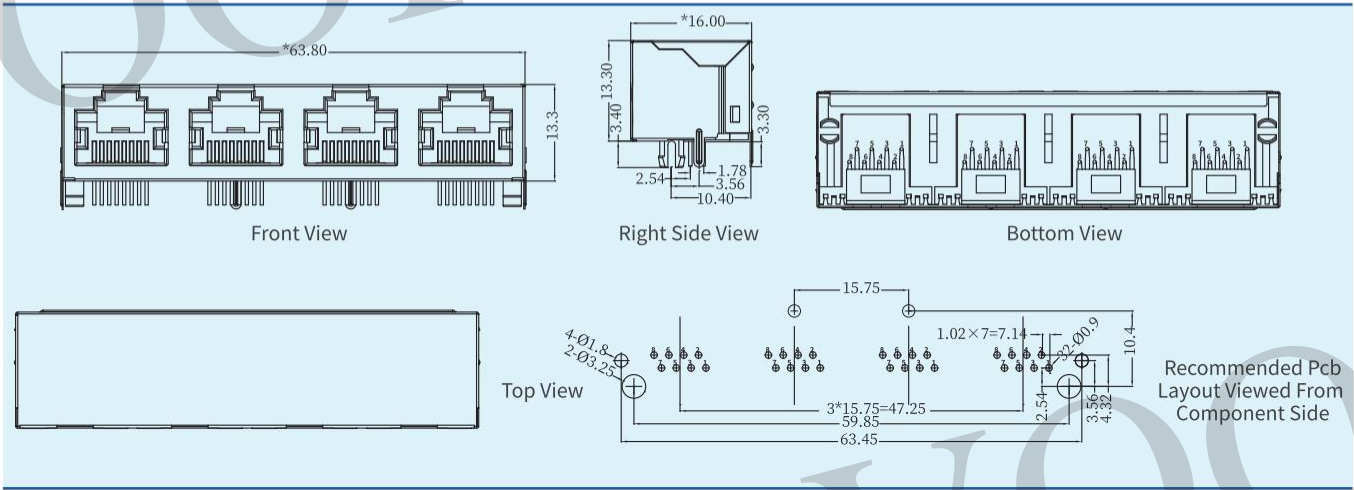

产品料号P/N:SYT561488HWA3DY1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: No

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

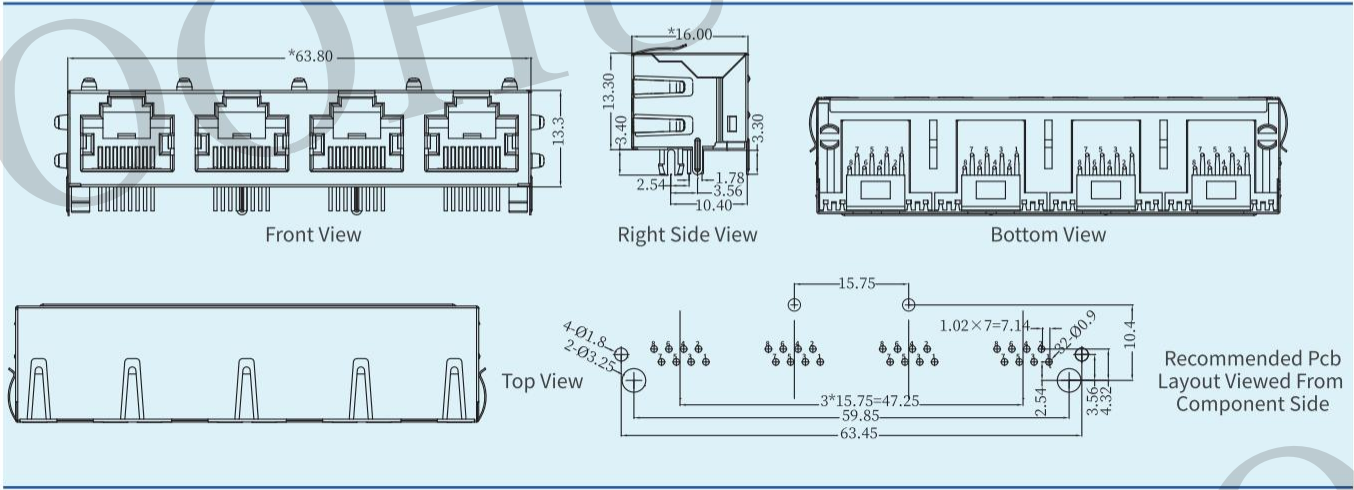

产品料号P/N:SYT561488AB1A1D9Y1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: Yes, L-Yellow / R-Green

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度 Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

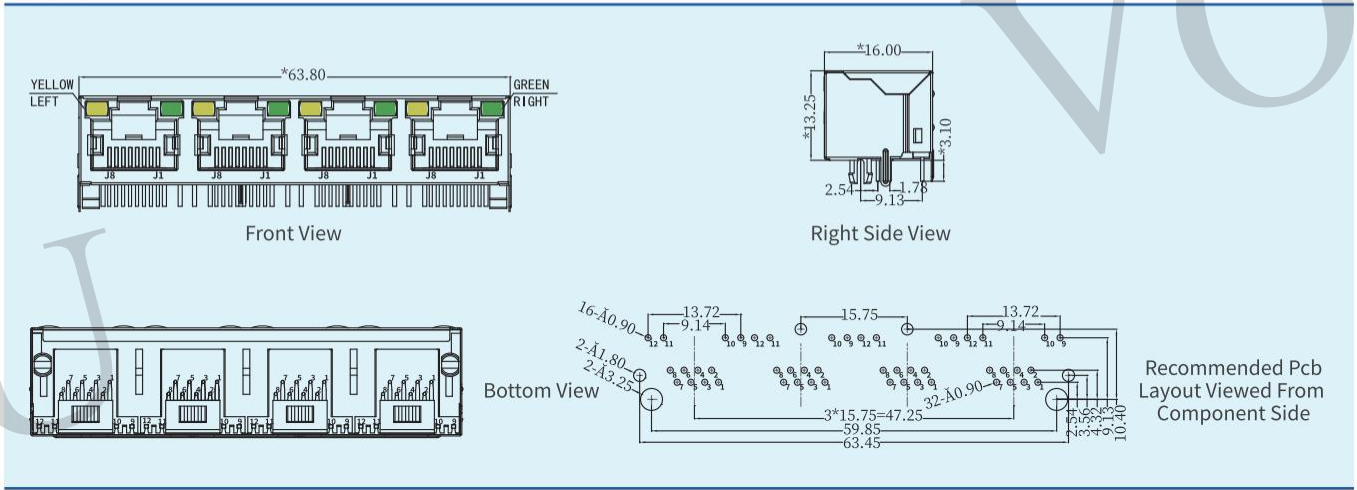

产品料号P/N:SYT561488DB2A3DY1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Up

是否带灯With LED: Yes, L-Green / R-Yellow

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional


标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

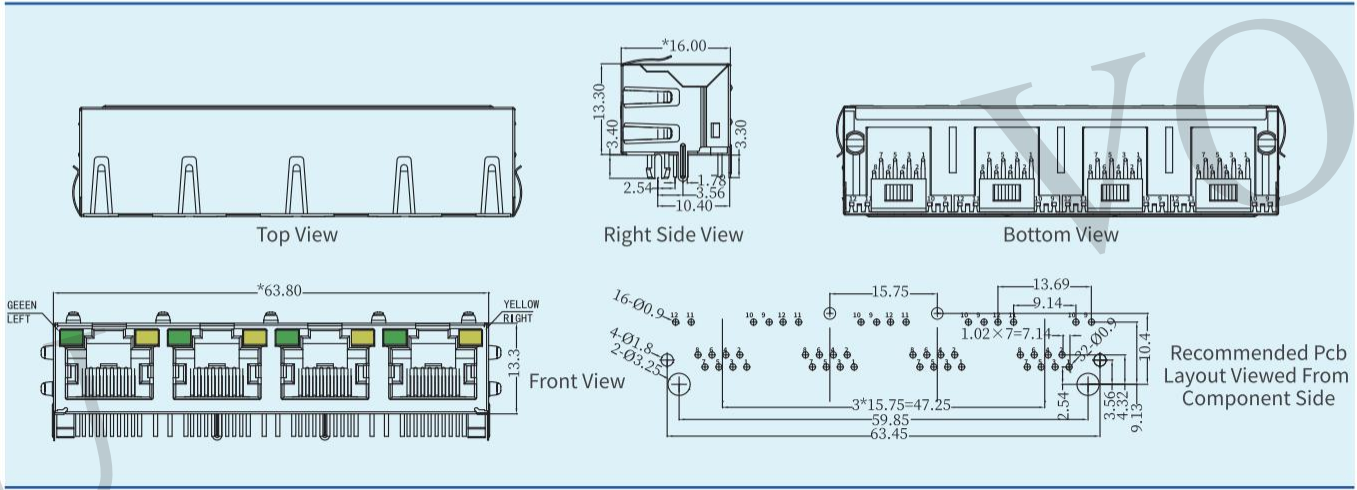




结构图:

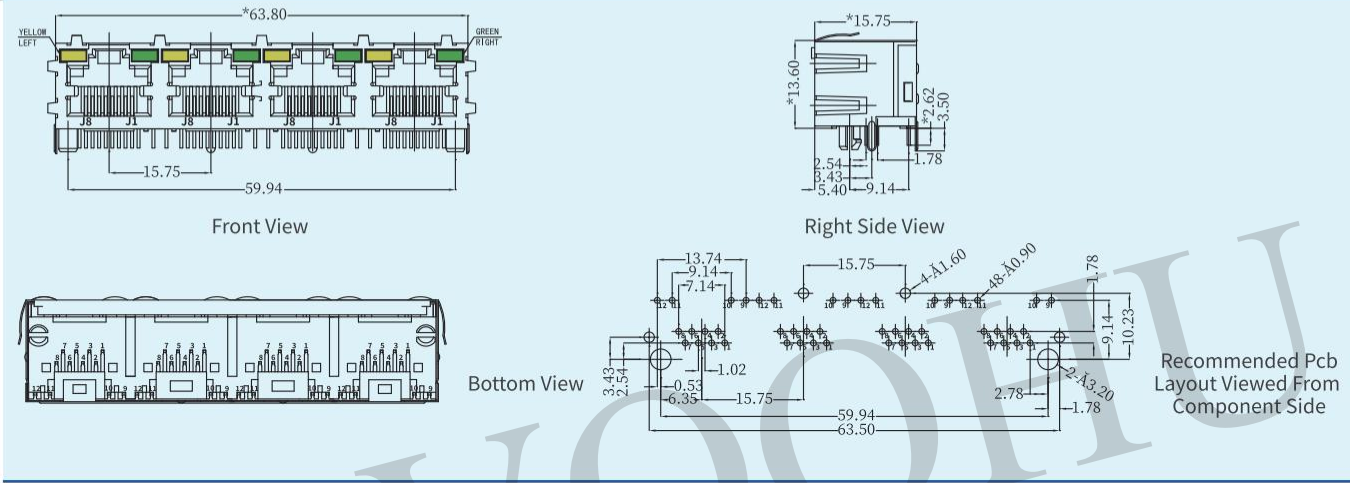


产品料号P/N:SYT561488DB1A2DBZ

产品规格Specifications:

- 类型Type: RJ45 connector
- 卡口方向Latch: Tab Up
- 是否带灯With LED: Yes, L-Yellow / R-Green
- 是否带金属壳With shielding: Yes
- 接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
- 接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
- Microinch optional
- 使用温度Operating temperature: -40~85°C
- 适用制程Application process: THT or THR optional
- 标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

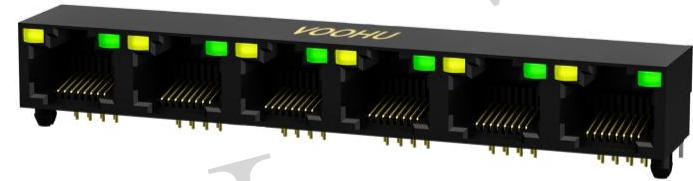

结构图:

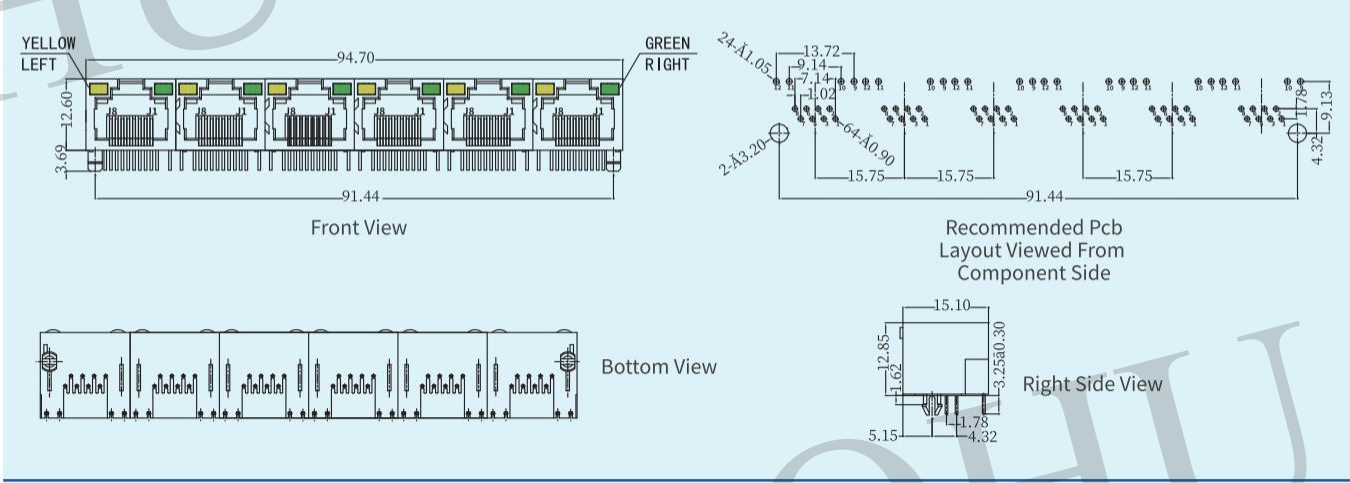


产品料号P/N:SYT561688JB1A1DY1

产品规格Specifications:

- 类型Type: RJ45 connector
- 卡口方向Latch: Tab Up
- 是否带灯With LED: Yes, L-Yellow / R-Green
- 是否带金属壳With shielding: No
- 接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
- 接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
- Microinch optional
- 使用温度Operating temperature: -40~85°C
- 适用制程Application process: THT or THR optional
- 标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL



结构图:

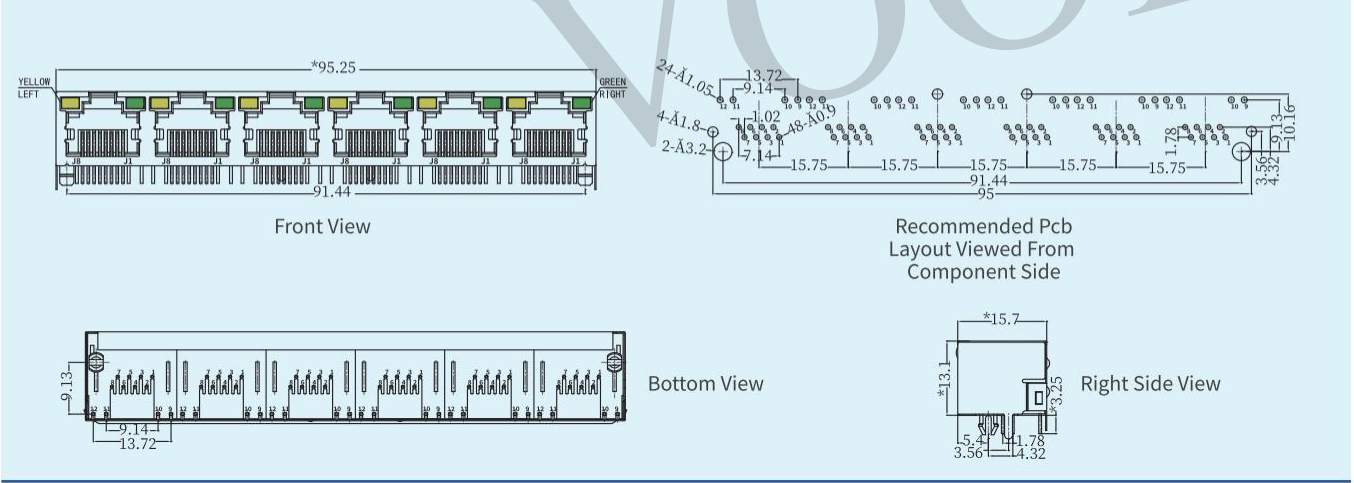


产品料号P/N:SYT561688AB1A1D9Y1

产品规格Specifications:

- 类型Type: RJ45 connector
- 卡口方向Latch: Tab Up
- 是否带灯With LED: Yes, L-Yellow / R-Green
- 是否带金属壳With shielding: Yes
- 接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
- 接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
- Microinch optional
- 使用温度Operating temperature: -40~85°C
- 适用制程Application process: THT or THR optional
- 标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL



结构图:

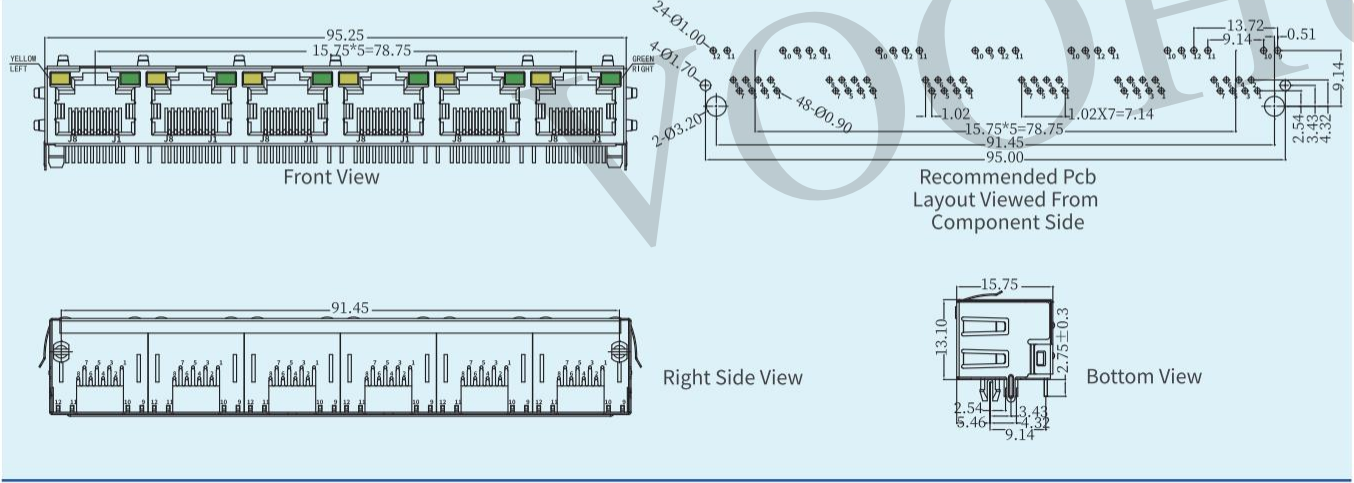

产品料号P/N:SYT561688DB1A1DY1

产品规格Specifications:

- 类型Type: RJ45 connector
- 卡口方向Latch: Tab Up
- 是否带灯With LED: Yes, L-Yellow / R-Green
- 是否带金属壳With shielding: Yes
- 接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
- 接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
- Microinch optional
- 使用温度Operating temperature: -40~85°C
- 适用制程Application process: THT or THR optional
- 标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL



产品料号P/N:SYT5721E1144IWA1DB1

产品规格 Specifications:

类型 Type: RJ11 connector

卡口方向Latch: Tab Down

是否带灯With LED: No

是否带金属壳With shielding: No

接触端子Contact Terminal: T=0.35mm Phosphor bronze wire

接触区电镀 Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度 Operating temperature: -40~85°C


适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:




Front View



Right Side View



Back View

Recommended Pcb
Layout Viewed From
Component Side

产品料号P/N:SYT5721E1166IWA1DB1

产品规格 Specifications:

类型 Type: RJ12 connector

卡口方向Latch: Tab Down

是否带灯With LED: No

是否带金属壳With shielding: No

接触端子Contact Terminal: T=0.35mm Phosphor bronze wire

接触区电镀 Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度 Operating temperature: -40~85°C


适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:




Front View





Right Side View



Back View



Bottom View

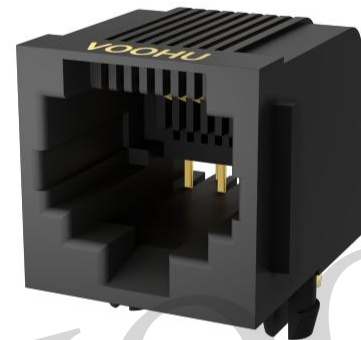Recommended Pcb
Layout Viewed From
Component Side

产品料号P/N:SYT5721E1188IWA1DB1

产品规格 Specifications:

类型 Type: RJ45 connector

卡口方向Latch: Tab Down

是否带灯With LED: No

是否带金属壳With shielding: No

接触端子Contact Terminal: T=0.35mm Phosphor bronze wire

接触区电镀 Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度 Operating temperature: -40~85°C


适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:




Front View

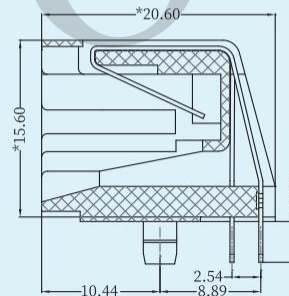


Cutaway View



Back View



Bottom View

Recommended Pcb
Layout Viewed From
Component Side

产品料号P/N:SYT57211188IWA1DB1

产品规格 Specifications:

类型 Type: RJ45 connector

卡口方向Latch: Tab Down

是否带灯With LED: No

是否带金属壳With shielding: No

接触端子Contact Terminal: T=0.35mm Phosphor bronze wire

接触区电镀 Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度 Operating temperature: -40~85°C


适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:




Front View

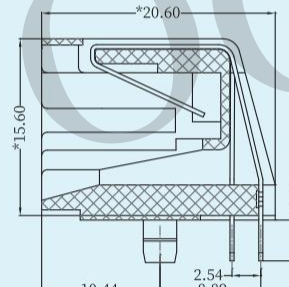


Cutaway View



Back View



Bottom View

Recommended Pcb
Layout Viewed From
Component Side



产品料号P/N:SYT57221166IWA1DB1

产品规格Specifications:

类型Type: RJ12 connector

卡口方向Latch: Tab Down

是否带灯With LED: No

是否带金属壳With shielding: No

接触端子Contact Terminal: T=0.35mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

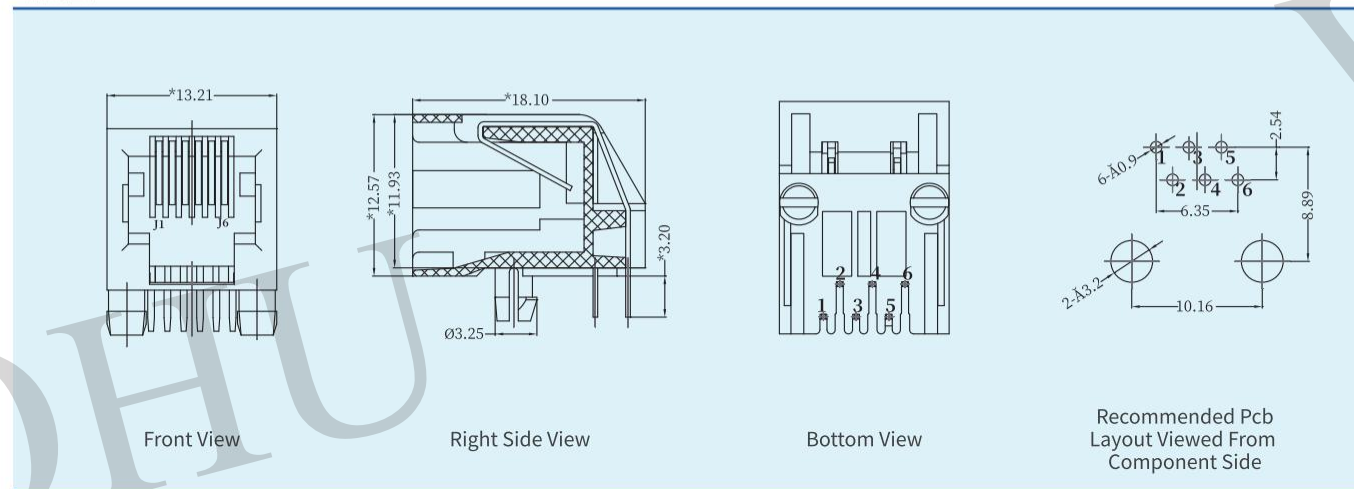

产品料号P/N:SYT59211118GWA3DY1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

是否带灯With LED: No

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

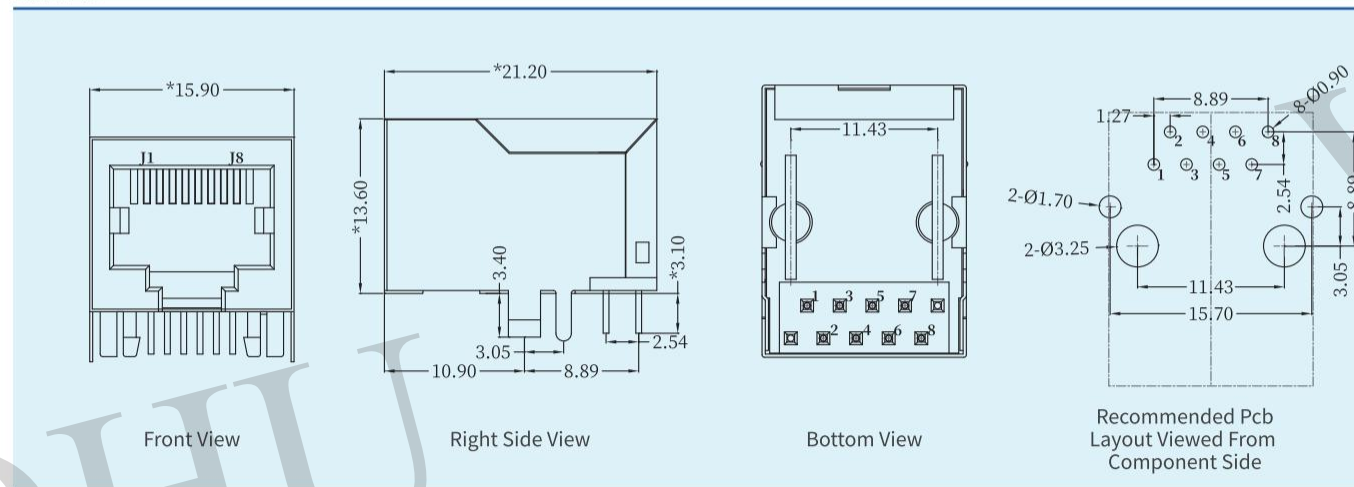

产品料号P/N:SYT59211118HWA3DY1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

是否带灯With LED: No

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

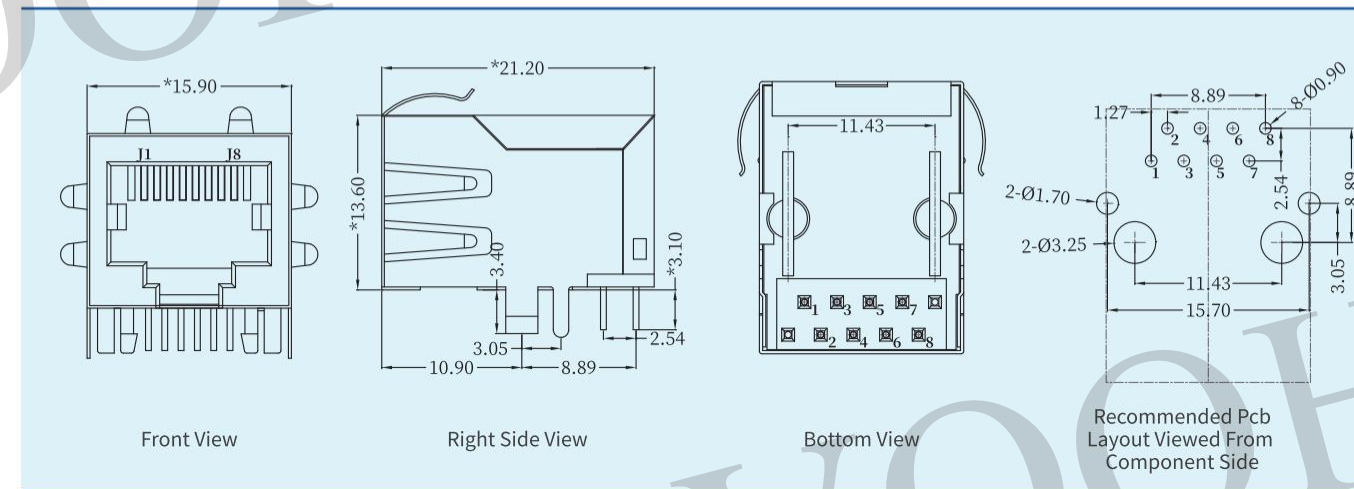

产品料号P/N:SYT59211118AA2A3DY1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: Tab Down

是否带灯With LED: Yes, L-Green / R-Yellow

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional


使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

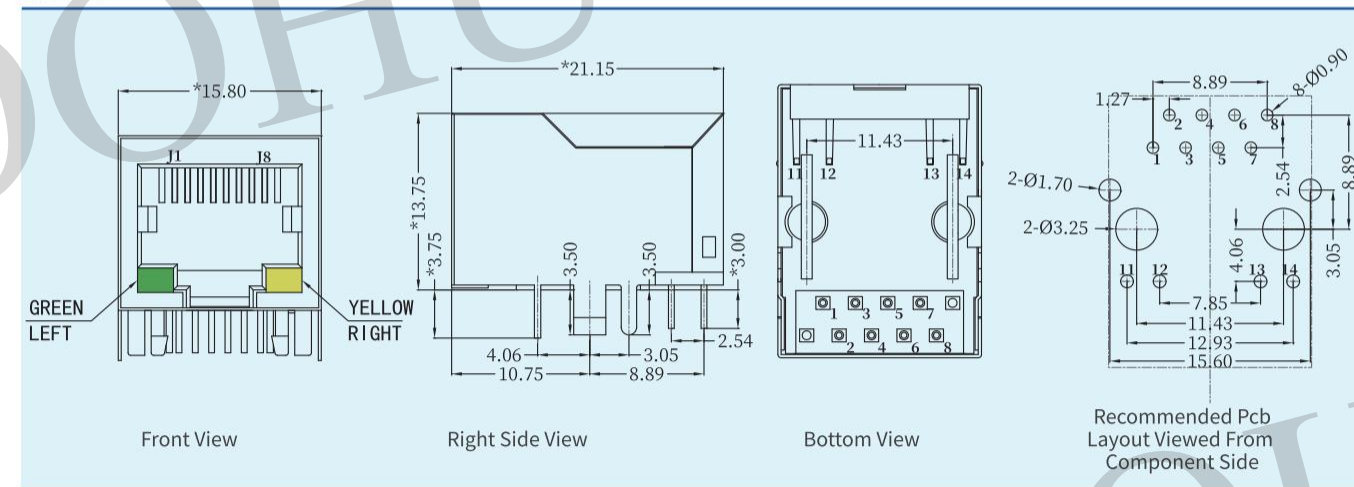




产品料号P/N:SYT59211118DB1A3DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
是否带灯With LED: Yes, L-Yellow / R-Green
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

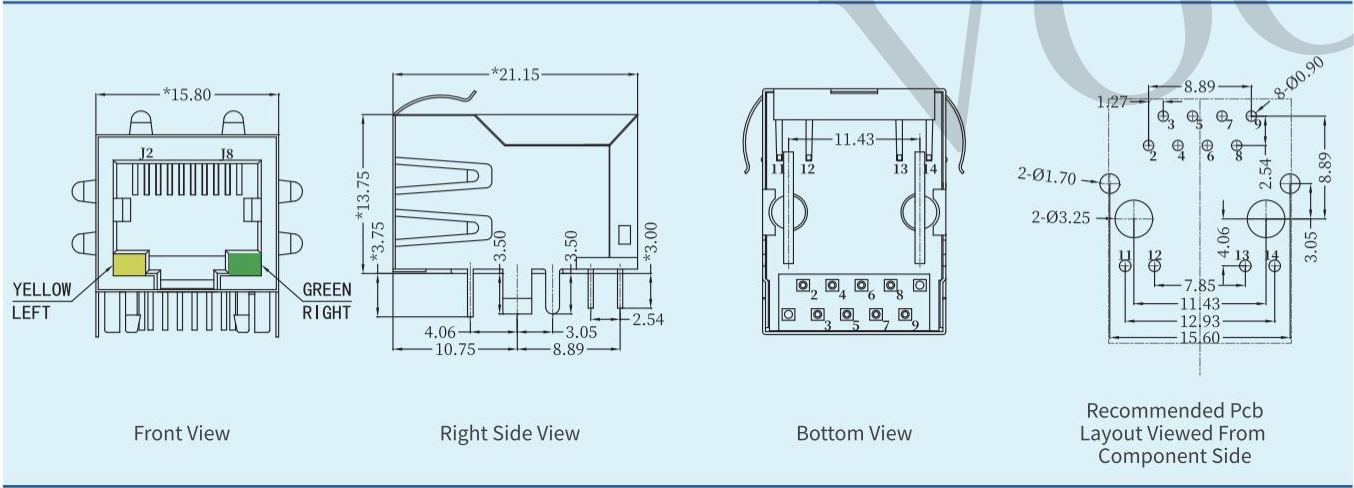



产品料号P/N:SYT59211111DB2A3DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
是否带灯With LED: Yes, L-Green / R-Yellow
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

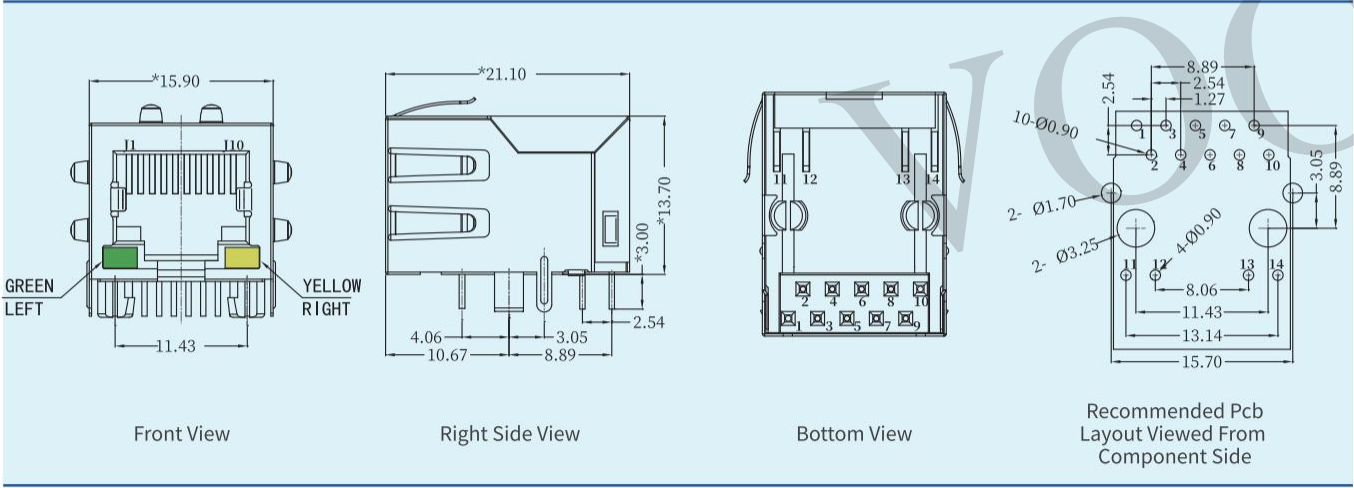


产品料号P/N:SYT592112181WA3DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
是否带灯With LED: No
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

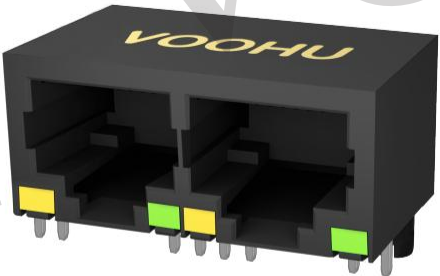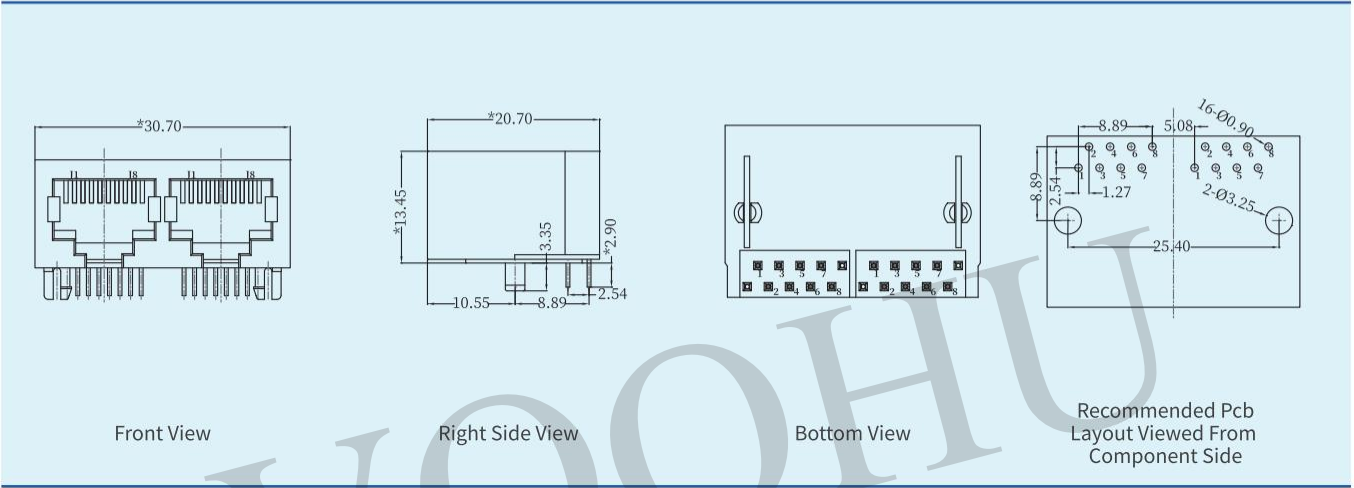

产品料号P/N:SYT59211288JB1A1DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
是否带灯With LED: Yes, L-Yellow / R-Green
是否带金属壳With shielding: No
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

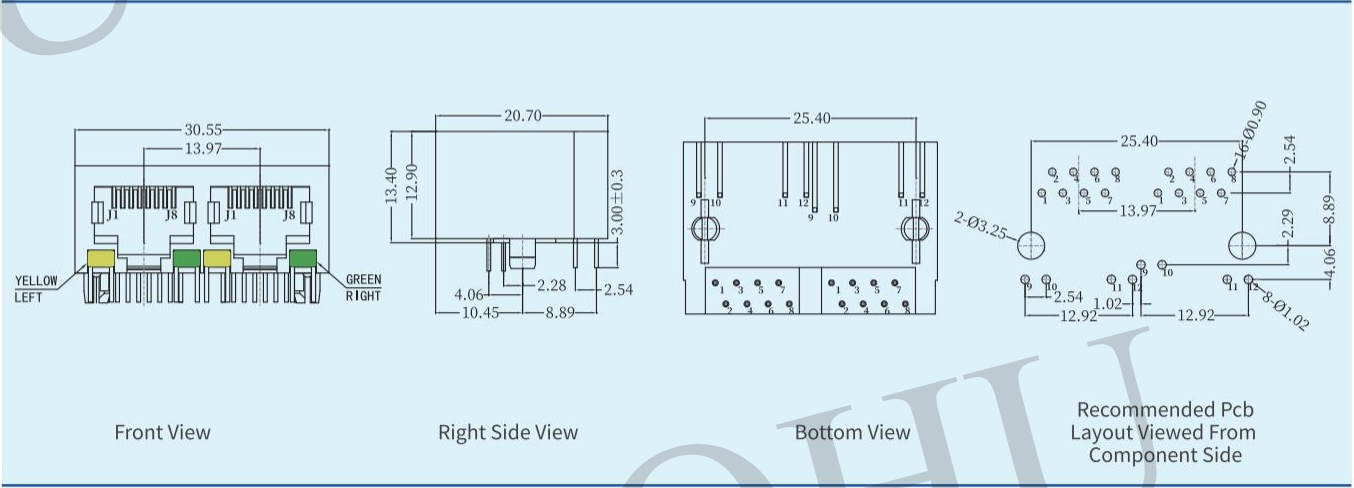



产品料号P/N:SYT59211288GWA1D3Y1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
是否带灯With LED: No
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

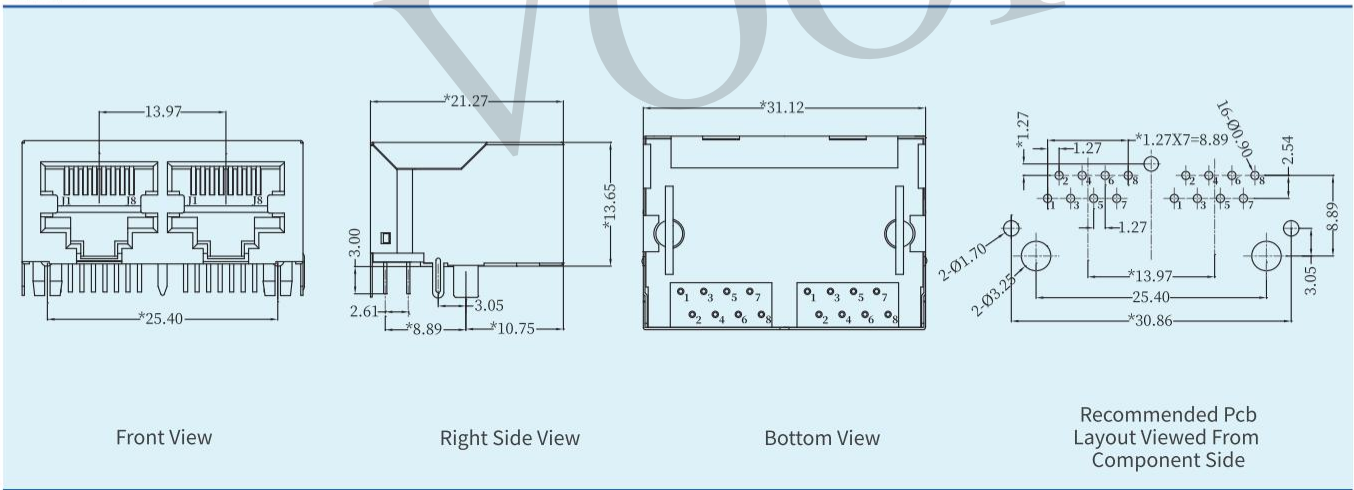

Front View

Right Side View


Bottom View

Recommended Pcb
Layout Viewed From
Component Side



产品料号P/N:SYT59211288AB1A1D3Y1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
是否带灯With LED: Yes, L-Yellow / R-Green
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

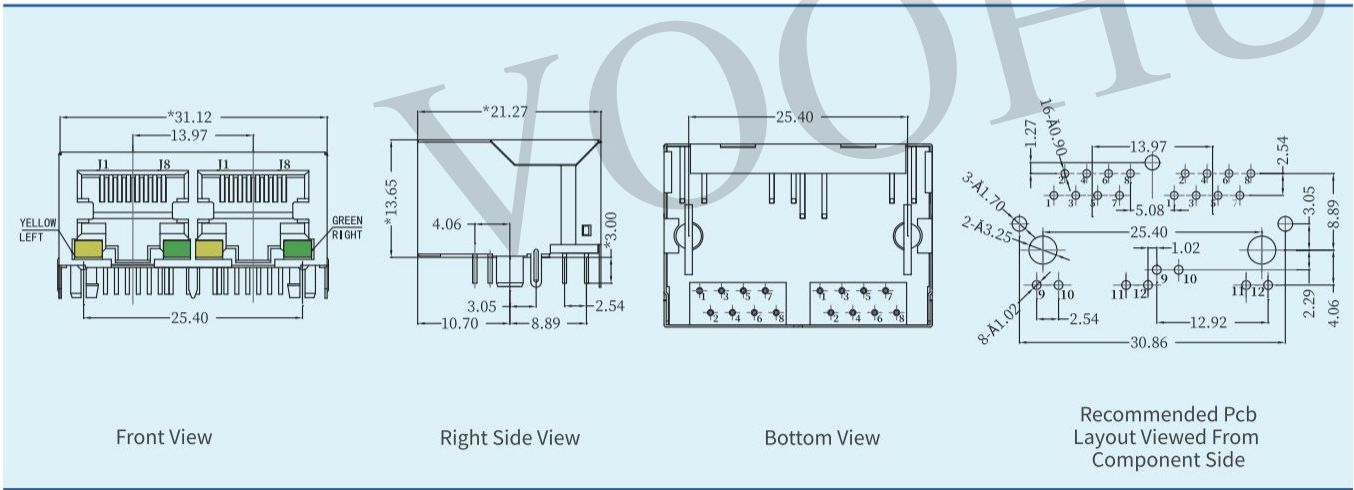


Front View

Right Side View


Bottom View

Recommended Pcb
Layout Viewed From
Component Side

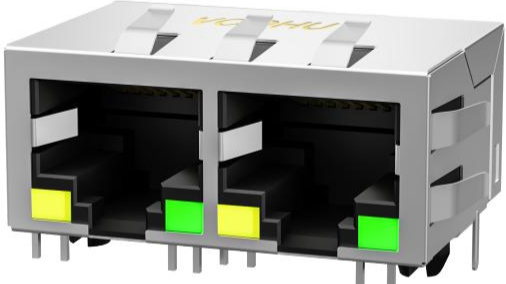

产品料号P/N:SYT59211288DB1A1D3Y1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
是否带灯With LED: Yes, L-Yellow / R-Green
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

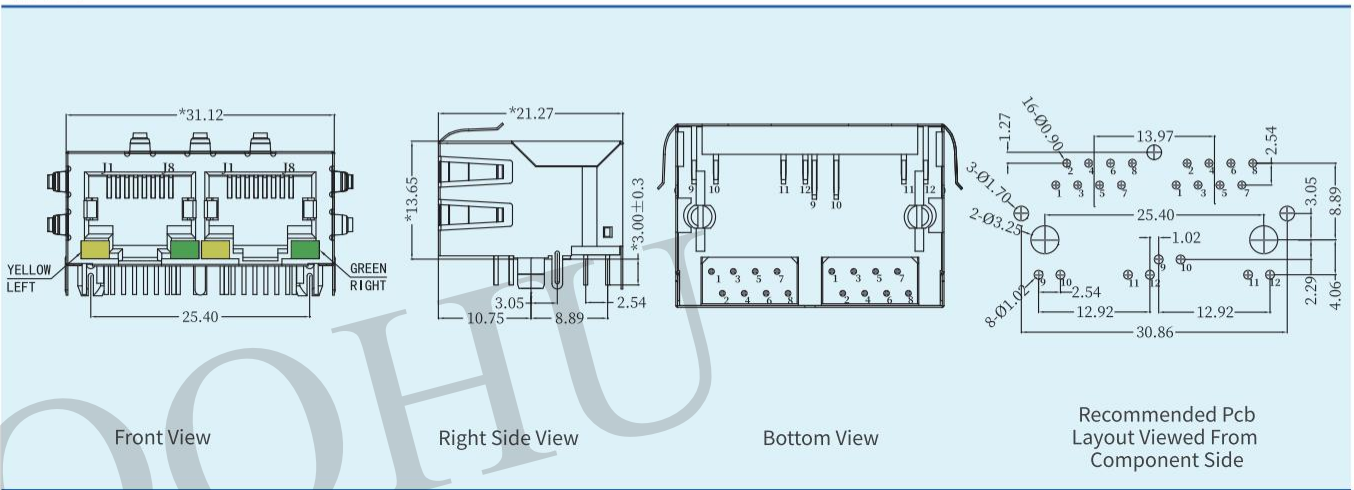

Front View

Right Side View


Bottom View

Recommended Pcb
Layout Viewed From
Component Side



产品料号P/N:SYT59211418GWA1D7Y1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Down
是否带灯With LED: No
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

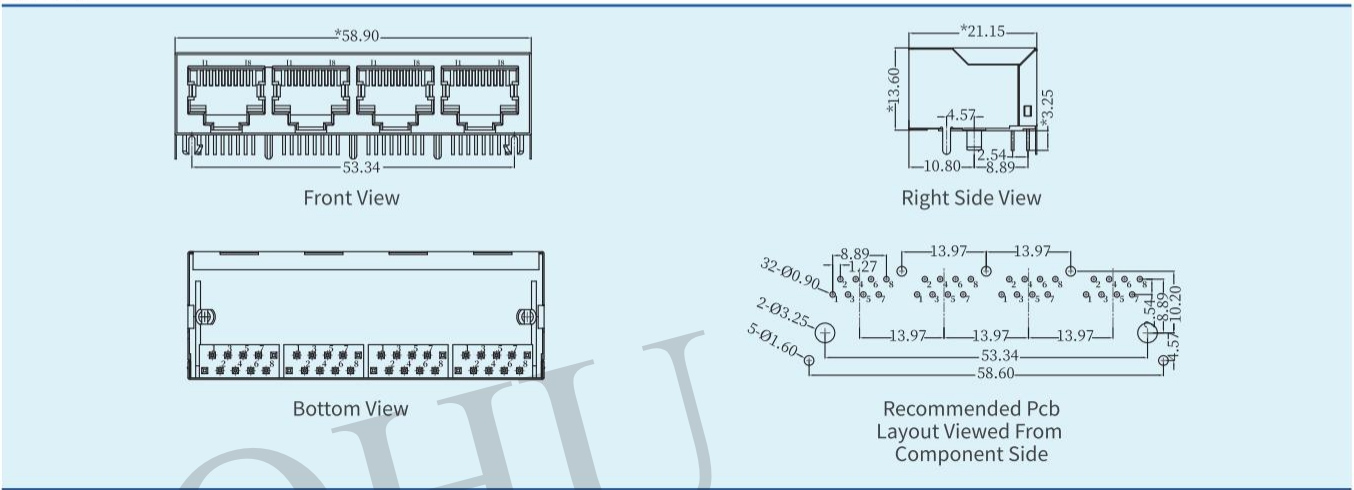

Front View


Right Side View

Bottom View


Recommended Pcb
Layout Viewed From
Component Side




结构图:




Front View



Right Side View



Bottom View



Recommended Pcb Layout Viewed From Component Side

产品料号P/N:SYT59212188GWA3DY4E

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

是否带灯With LED: No

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50

Microinch optional


使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional


标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL




结构图:




Front View



Right Side View



Bottom View



Recommended Pcb Layout Viewed From Component Side

产品料号P/N:SYT59212188AB1A1DY1

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

是否带灯With LED: Yes, L-Yellow / R-Green

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50

Microinch optional


使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional


标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL




结构图:




Front View



Right Side View



Bottom View

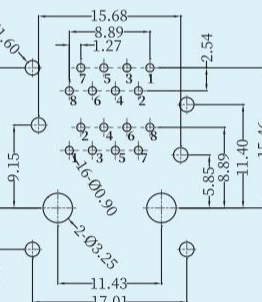

Recommended Pcb Layout Viewed From Component Side

产品料号P/N:SYT59212188HWA1DY1A

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

是否带灯With LED: No

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50

Microinch optional


使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional


标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL




结构图:




Front View



Right Side View



Bottom View



Recommended Pcb Layout Viewed From Component Side

产品料号P/N:SYT59212188DB2A1DY1D

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch:

是否带灯With LED: Yes, L-Green / R-Yellow

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50

Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL



产品料号P/N:SYT59212288AB1A1DY1C

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: 是否带灯With LED: Yes, L-Yellow / R-Green

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

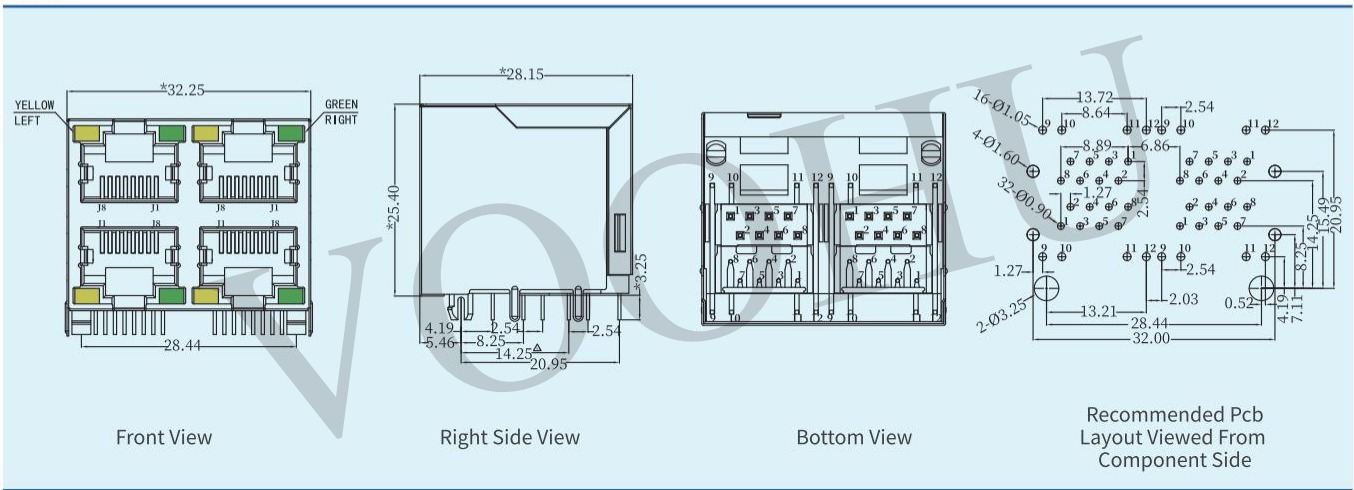

产品料号P/N:SYT59212288DB1A1DY4C

产品规格Specifications:

类型 Type: RJ45 connector

卡口方向Latch: 是否带灯With LED: Yes, L-Yellow / R-Green

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

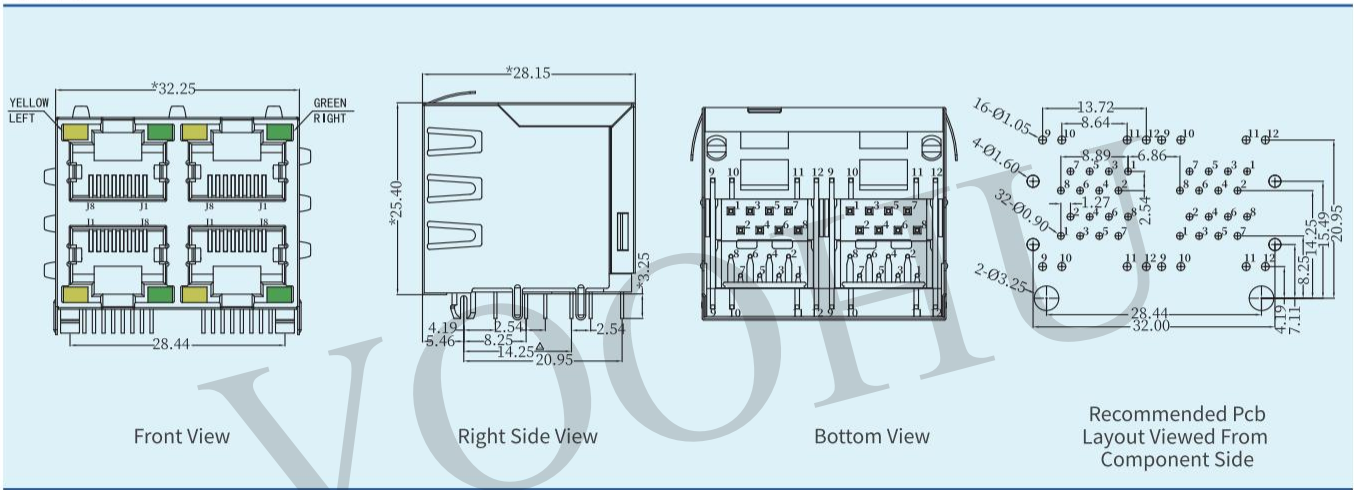

产品料号P/N:SYT59212388DB1A1DY1B

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: 是否带灯With LED: Yes, L-Yellow / R-Green

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

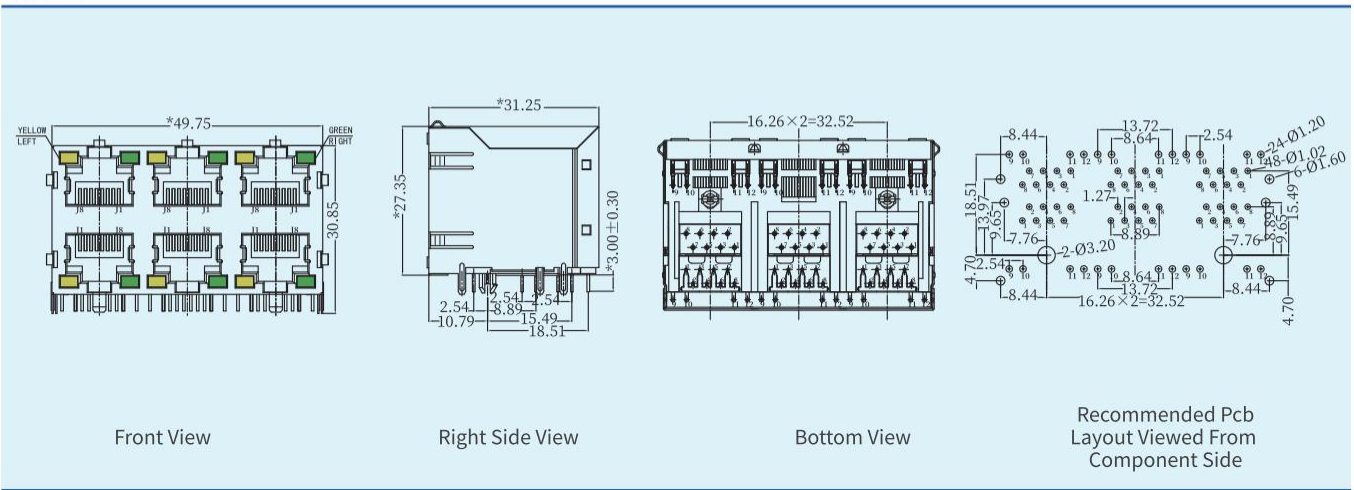

产品料号P/N:SYT59212488GWA1DY3E

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: 是否带灯With LED: No

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

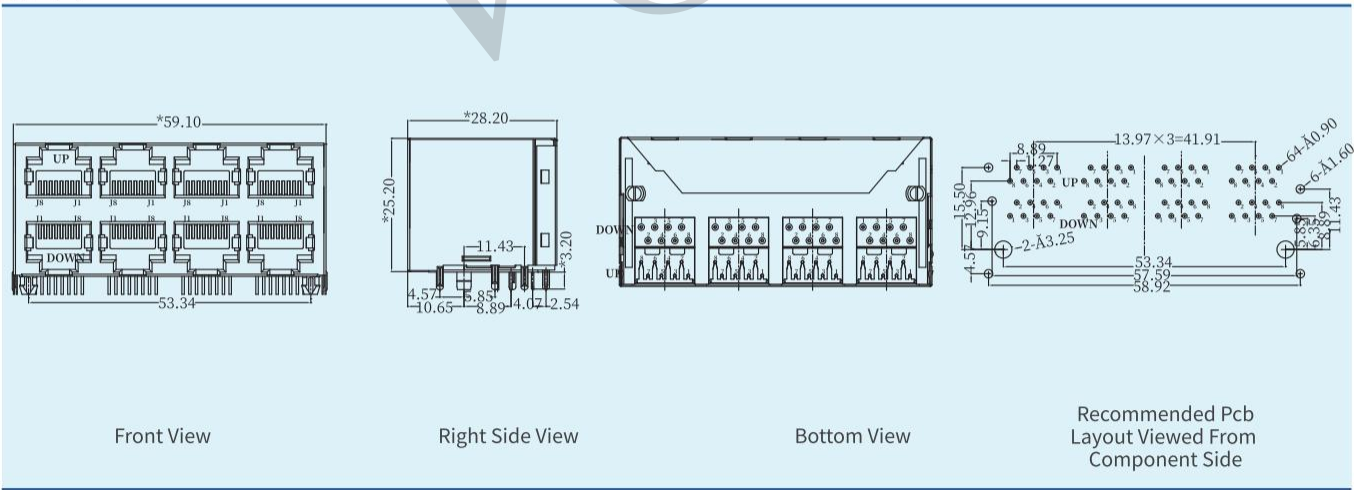



产品料号P/N:SYT59212488AB1A1DY1C

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: 是否带灯With LED: Yes, L-Yellow / R-Green

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

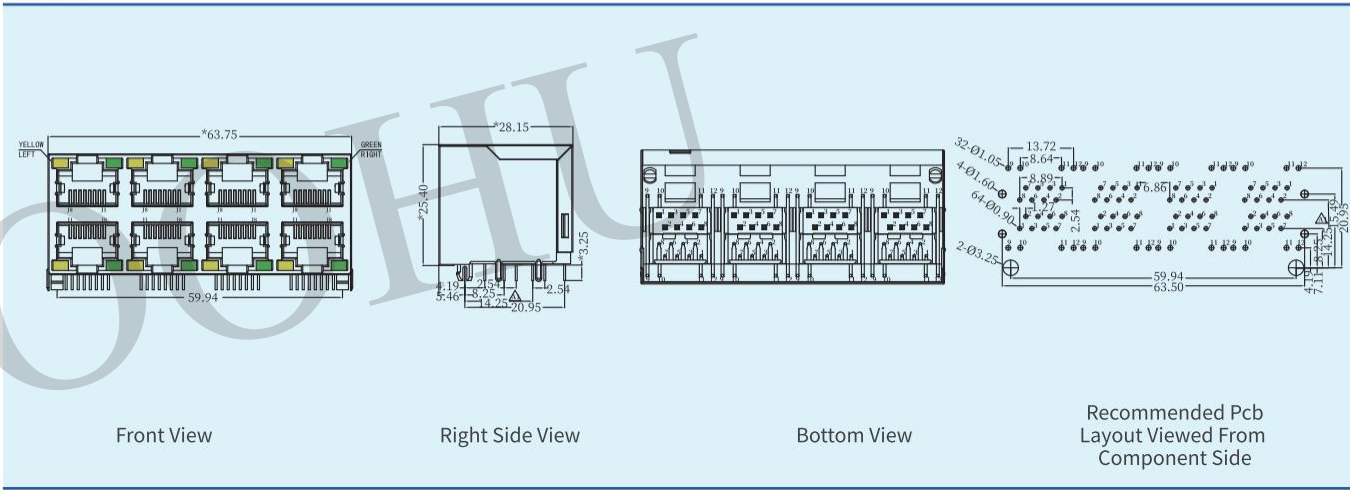



产品料号P/N:SYT59212488DB1A1DY1C

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: 是否带灯With LED: Yes, L-Yellow / R-Green

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional


使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

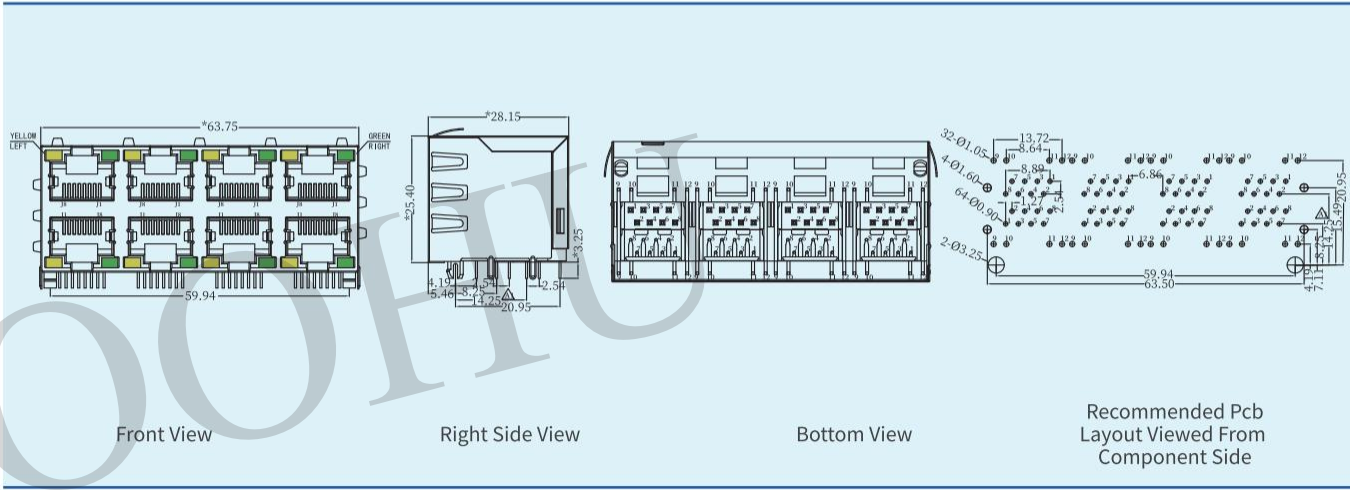

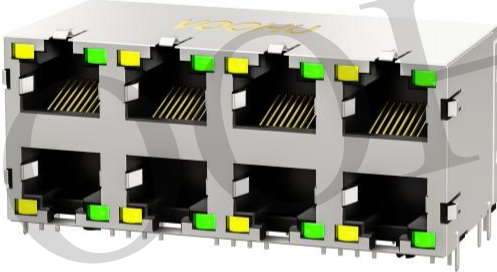

产品料号P/N:SYT59212488DB1A1DY1B

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: 是否带灯With LED: Yes, L-Yellow / R-Green

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional


使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

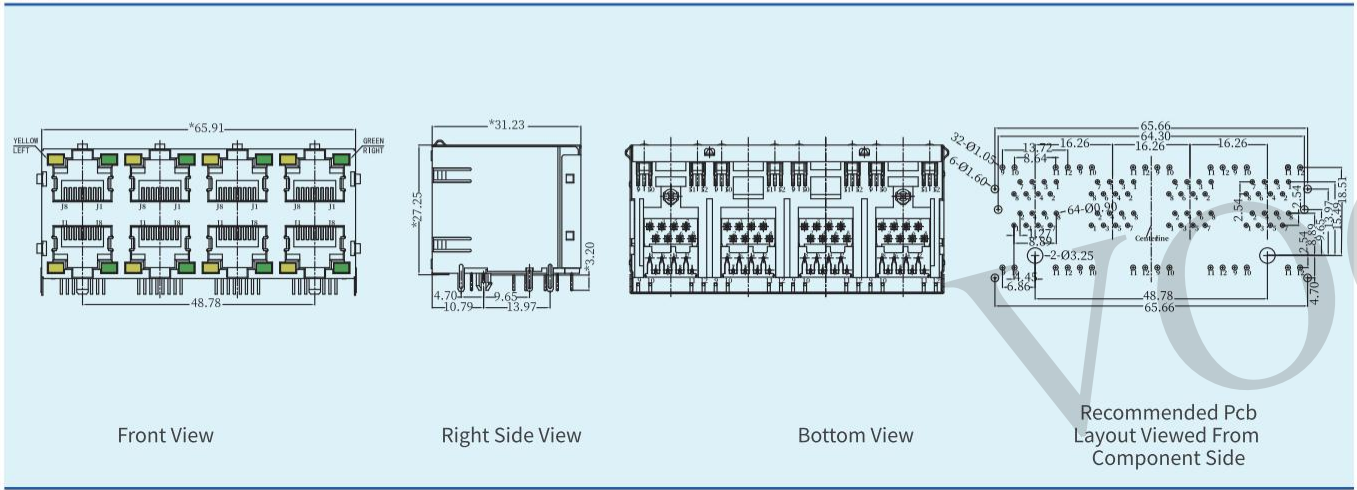

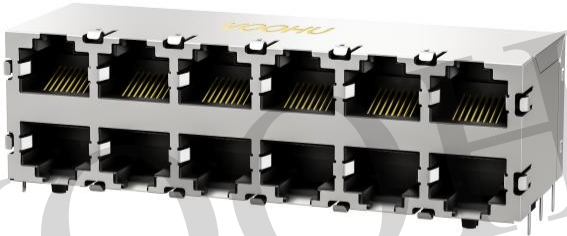

产品料号P/N:SYT59212688HWA1DY1A

产品规格Specifications:

类型Type: RJ45 connector

卡口方向Latch: 是否带灯With LED: No

是否带金属壳With shielding: Yes

接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire

接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50


Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: THT or THR optional

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

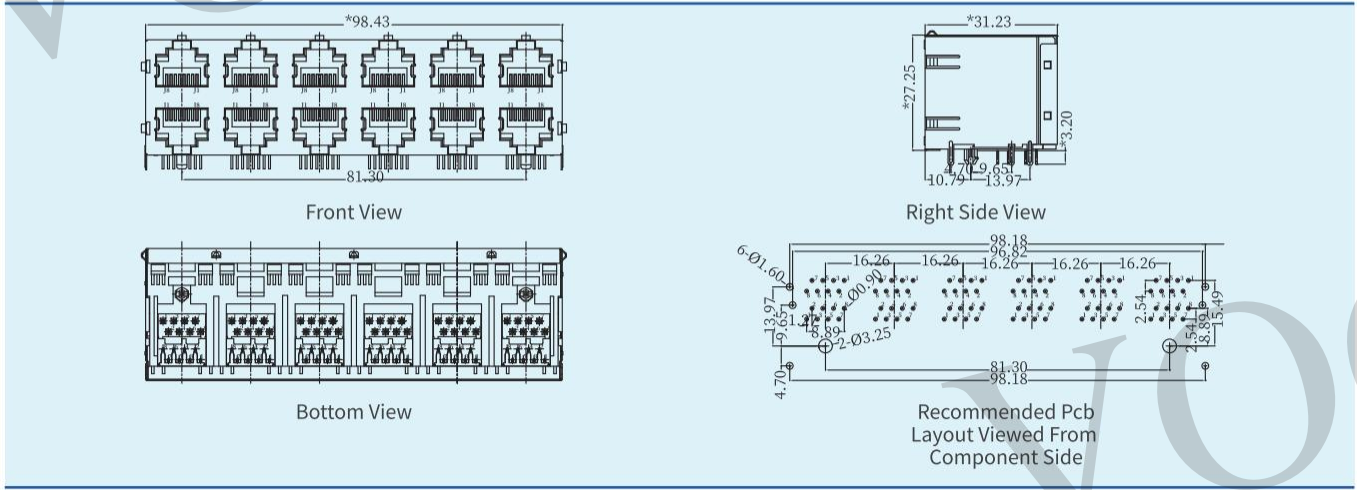




产品料号P/N:SYT60S1188DB2A6DY4
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: Yes, L-Green / R-Yellow
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

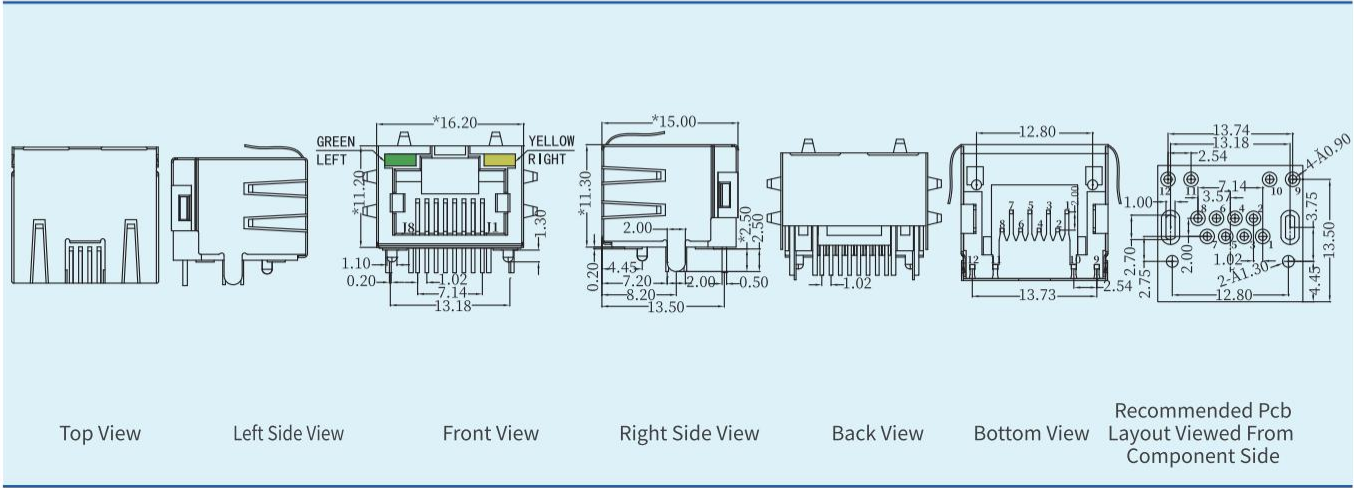


产品料号P/N:SYTRU121188GWW1DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

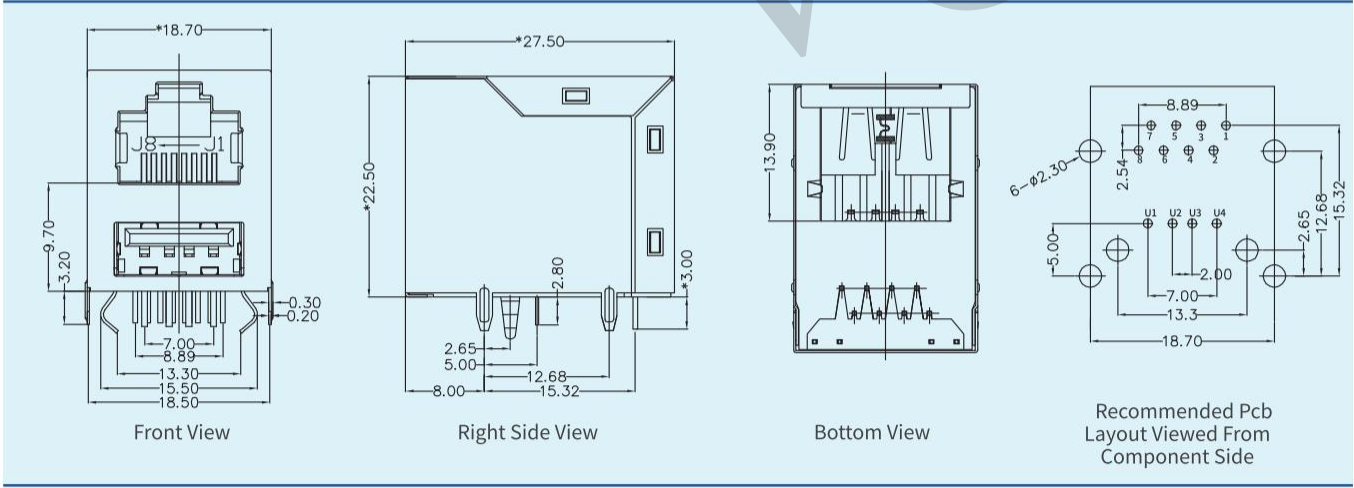


产品料号P/N:SYTRU121188AB2W1DY1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: Yes, L-Green / R-Yellow
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

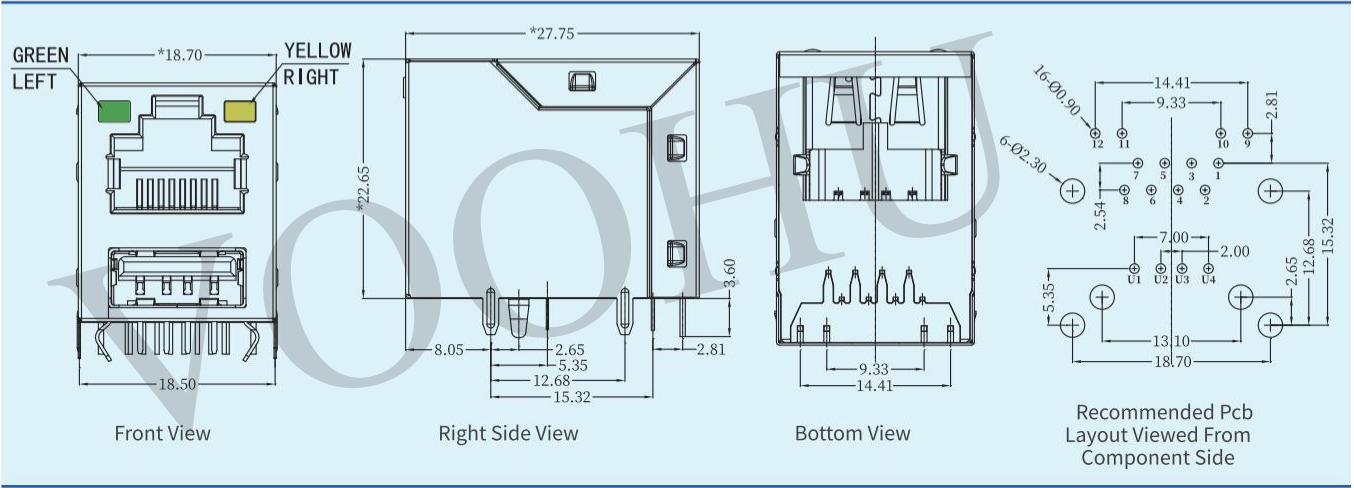

产品料号P/N:SYTRU131188AB1WDB1
产品规格Specifications:
类型Type: RJ45 connector
卡口方向Latch: Tab Up
是否带灯With LED: Yes, L-Yellow / R-Green
是否带金属壳With shielding: Yes
接触端子Contact Terminal: Ø0.46mm Phosphor bronze wire
接触区电镀Gold plating on contact area: G/F/0.6/1/1.5/3/6/15/30/50
Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

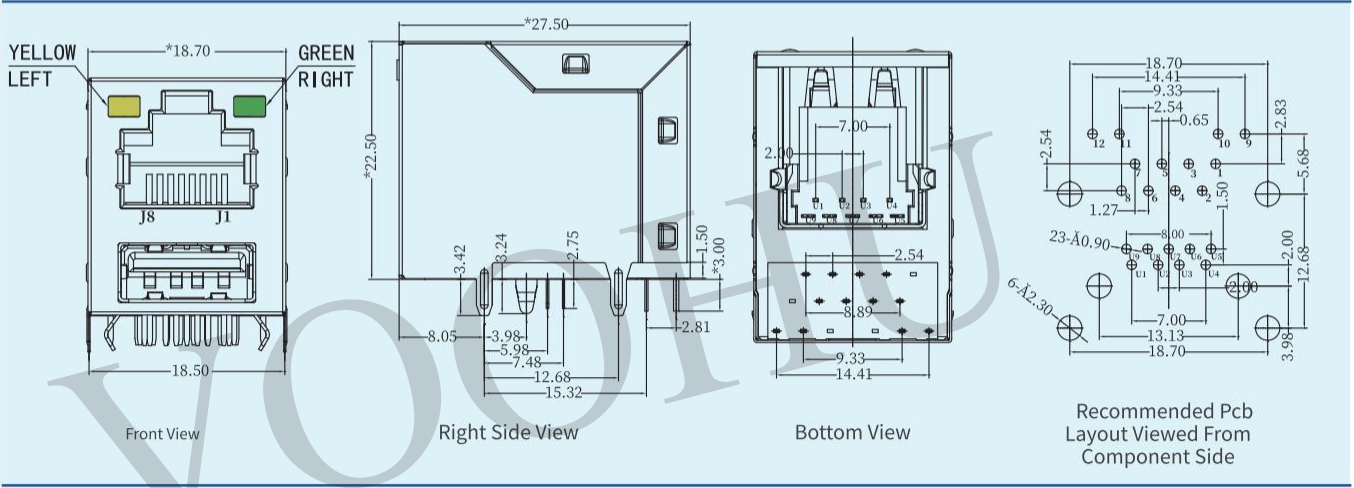




产品料号P/N:SYTCB2811JB1W5DB1
产品规格Specifications:
类型Type: RJ45 low-profile connector
卡口方向Latch: Tab Up
是否带灯With LED: Yes, L-Yellow / R-Green
是否带金属壳With shielding: No
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

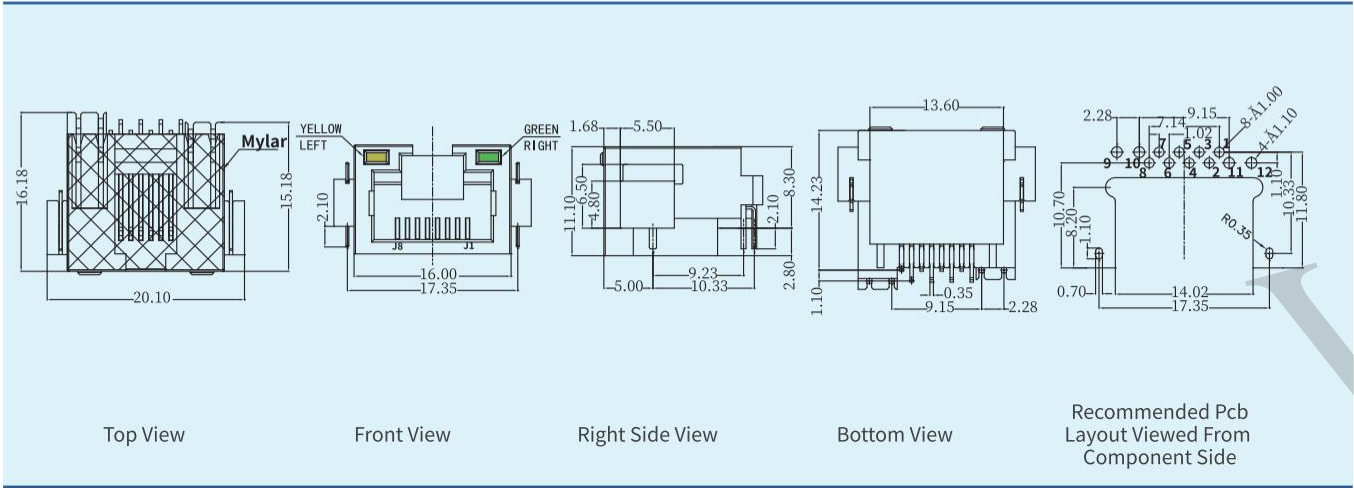


产品料号P/N:SYTCB301188GWW6DB5
产品规格Specifications:
类型Type: RJ45 low-profile connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: Yes
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

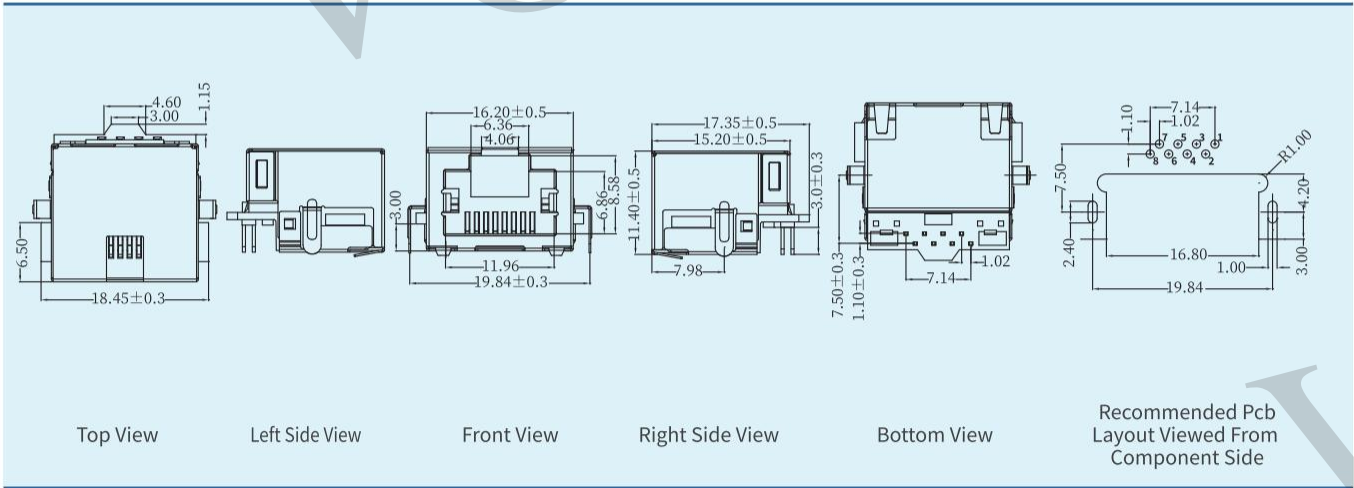


产品料号P/N:SYTCB421188GWW6DB1
产品规格Specifications:
类型Type: RJ45 low-profile connector
卡口方向Latch: Tab Up
是否带灯With LED: No
是否带金属壳With shielding: Yes
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

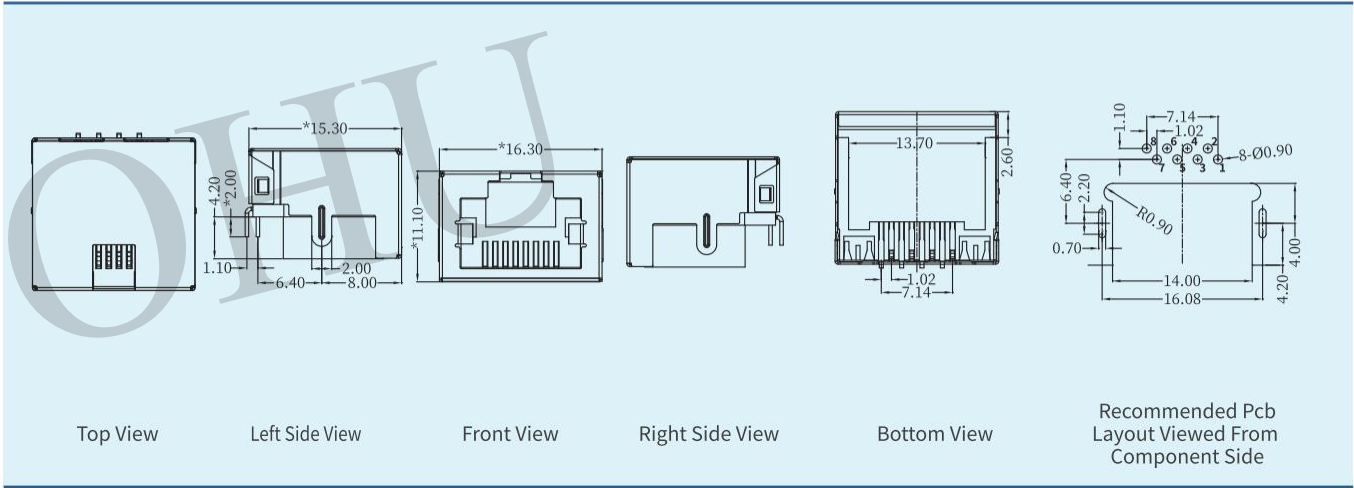

产品料号P/N:SYTCB301188AB1W6DB6
产品规格Specifications:
类型Type: RJ45 low-profile connector
卡口方向Latch: Tab Up
是否带灯With LED: Yes, L-Yellow / R-Green
是否带金属壳With shielding: Yes
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

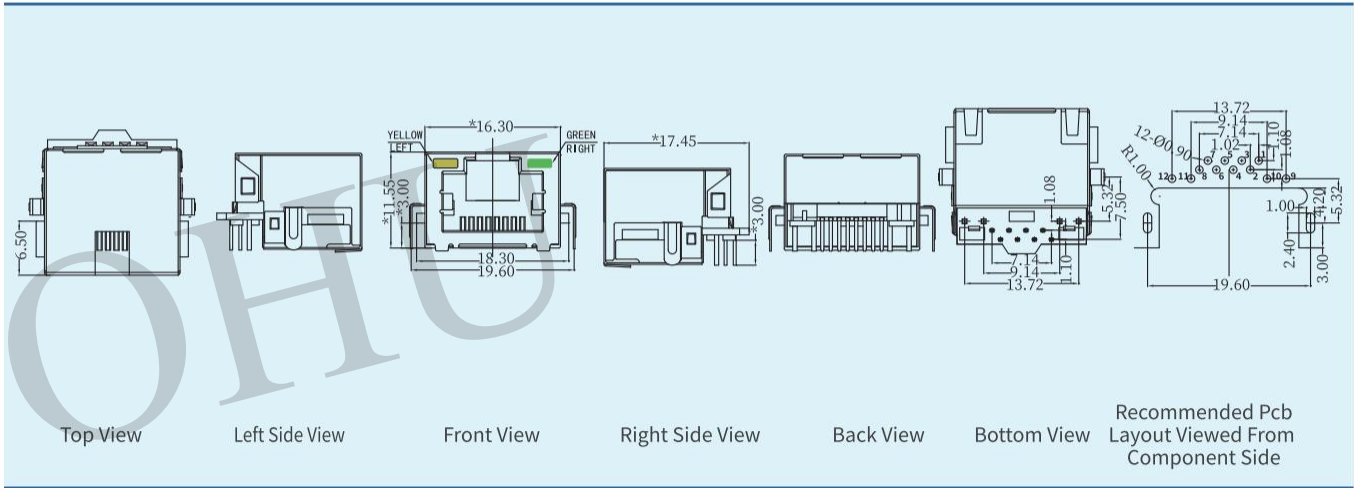




产品料号P/N:SYTCB421188AB1WDB1
产品规格Specifications:
类型Type: RJ45 low-profile connector
卡口方向Latch: Tab Up
接触端子Contact terminal: Phosphor bronze
是否带灯With LED: Yes, L-Yellow / R-Green
是否带金属壳With shielding: Yes
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: SMT
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

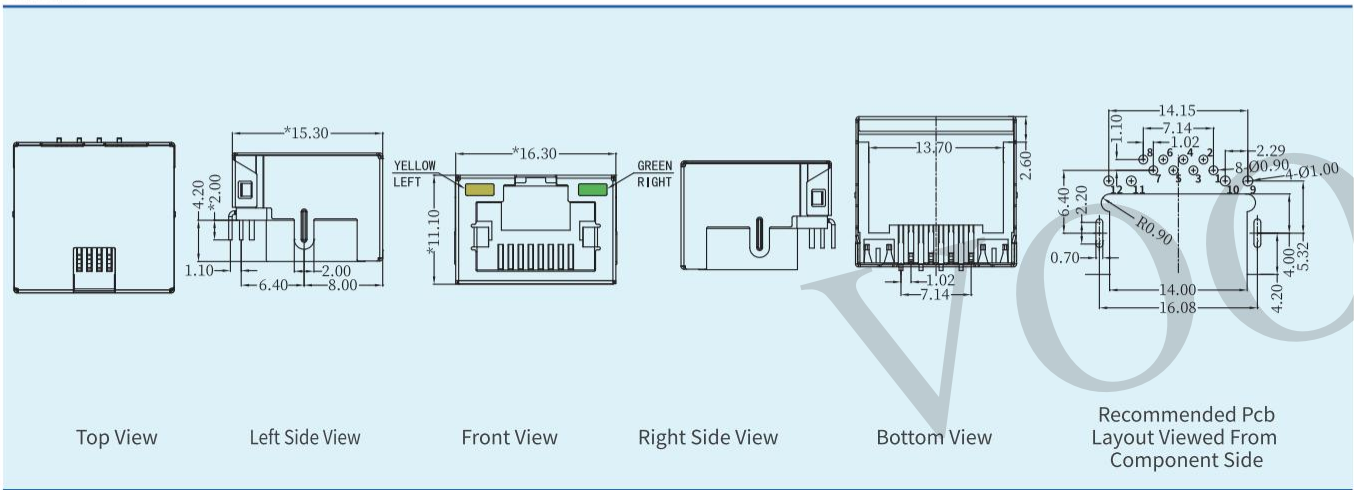


产品料号P/N:SYTCB701188AB1W9DB1
产品规格Specifications:
类型Type: RJ45 low-profile connector
卡口方向Latch: Tab Up
是否带灯With LED: Yes, L-Yellow / R-Green
是否带金属壳With shielding: Yes
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: THT or THR optional
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

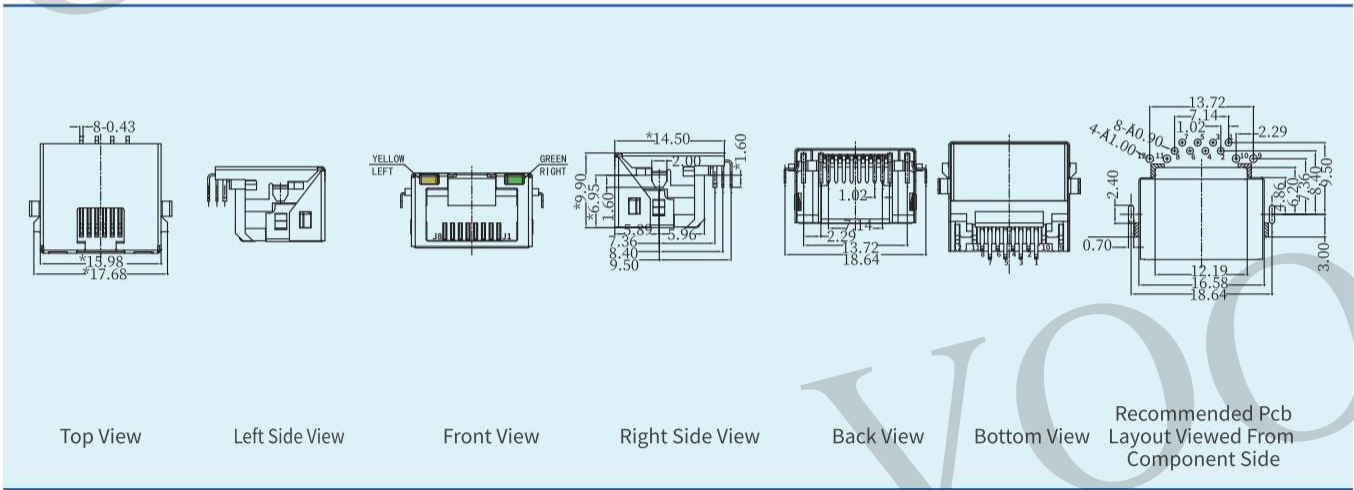


产品料号P/N:SYTCB281188GWW6SB1
产品规格Specifications:
类型Type: RJ45 low-profile connector
卡口方向Latch: Tab Up
接触端子Contact terminal: Phosphor bronze
是否带灯With LED: No
是否带金属壳With shielding: Yes
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: SMT
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

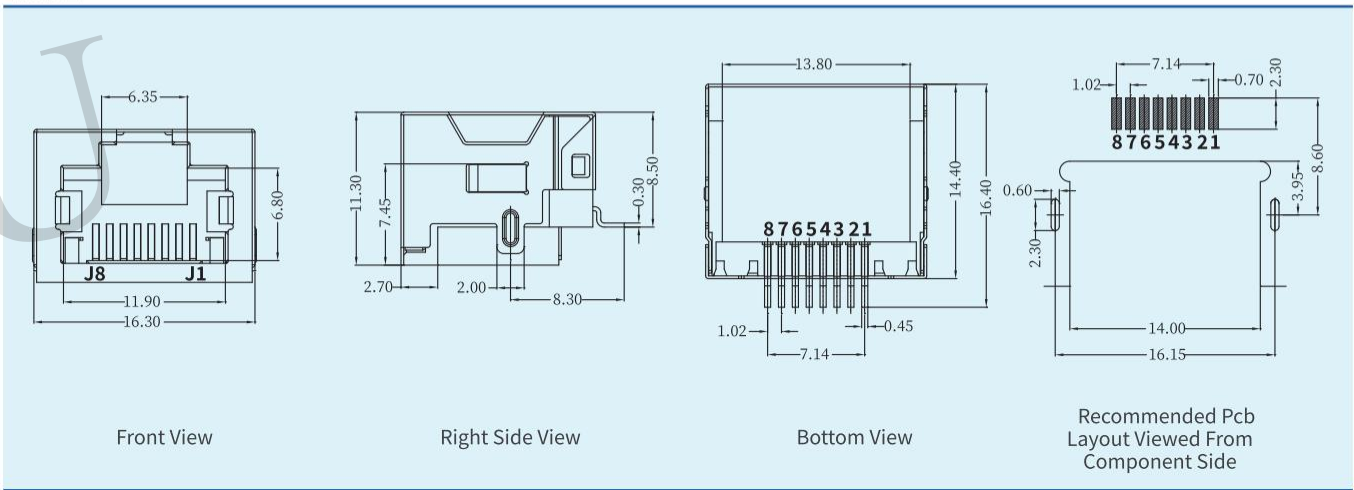

产品料号P/N:SYTCB421188AB1W6SB1
产品规格Specifications:
类型Type: RJ45 low-profile connector
卡口方向Latch: Tab Up
接触端子Contact terminal: Phosphor bronze
是否带灯With LED: Yes, L-Yellow / R-Green
是否带金属壳With shielding: Yes
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: SMT
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL


结构图:

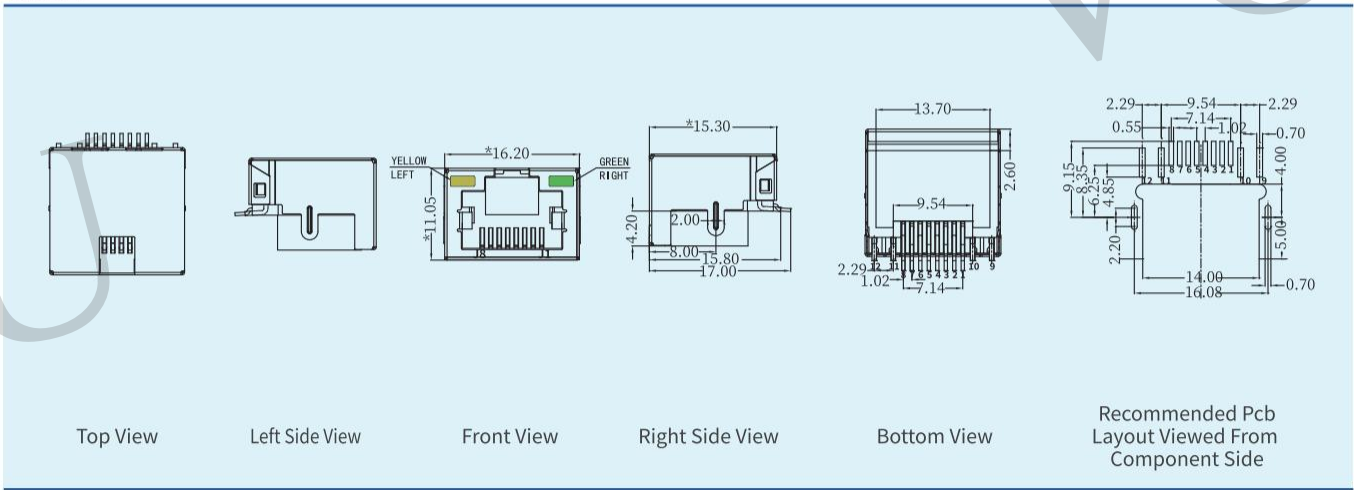




产品料号P/N:SYTCB421188GWW6SB1
产品规格Specifications:
类型Type: RJ45 low-profile connector
卡口方向Latch: Tab Up
接触端子Contact terminal: Phosphor bronze
是否带灯With LED: No
是否带金属壳With shielding: Yes
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: SMT
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

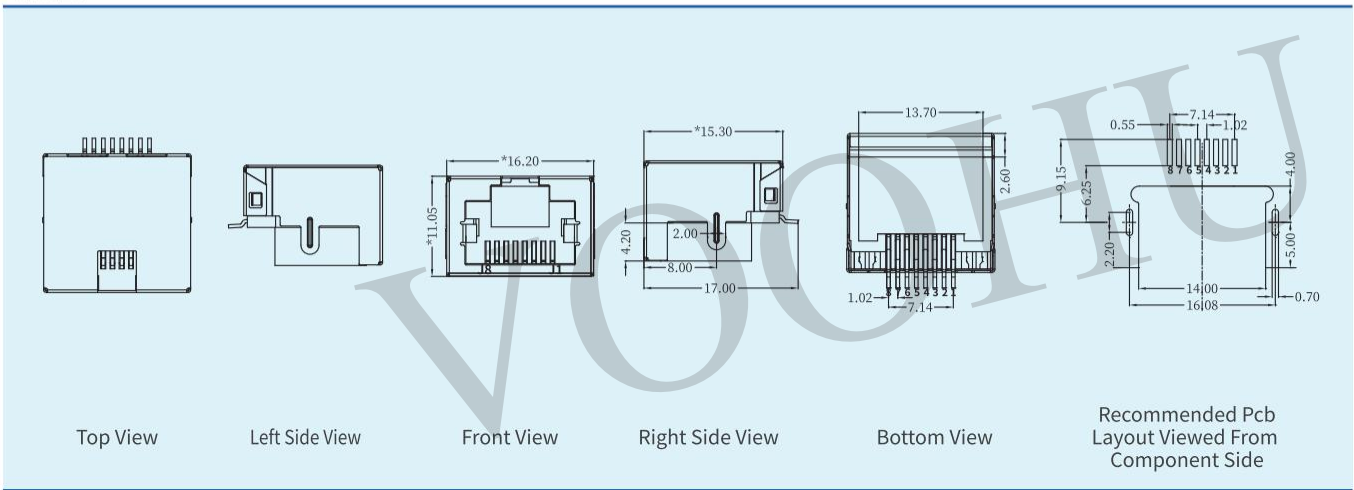


产品料号P/N:SYTCB551188GWA6SB1
产品规格Specifications:
类型Type: RJ45 low-profile connector
卡口方向Latch: Tab Down
接触端子Contact terminal: Phosphor bronze
是否带灯With LED: No
是否带金属壳With shielding: Yes
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: SMT
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

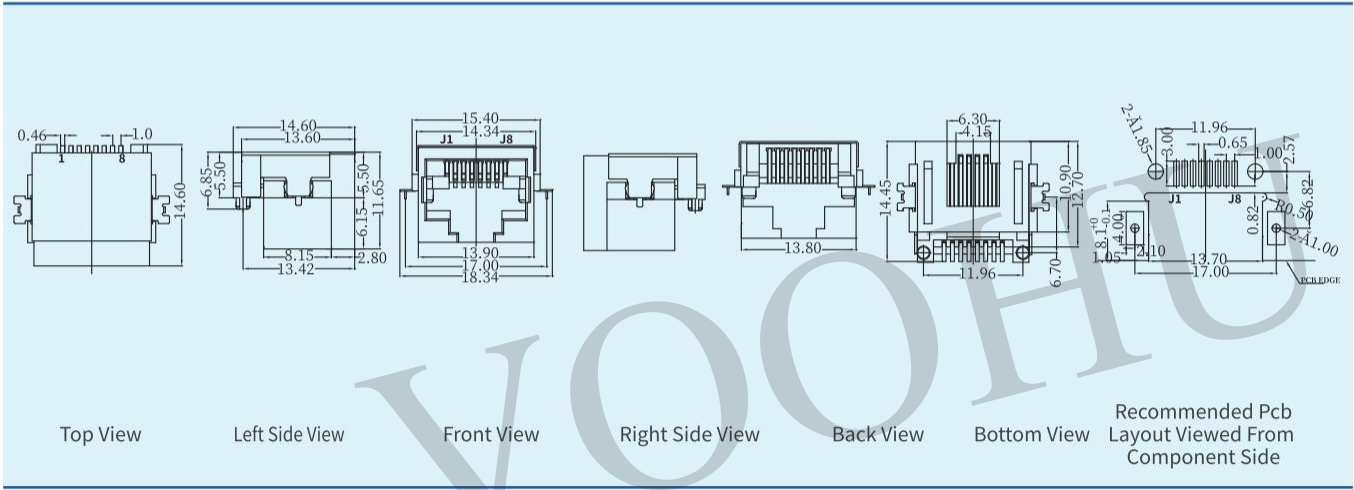


产品料号P/N:SYTDCB801188GWA6SB1
产品规格Specifications:
类型Type: RJ45 Mid-mount panel mount connector
卡口方向Latch: Tab Up
接触端子Contact terminal: Phosphor bronze
是否带灯With LED: No
是否带金属壳With shielding: Yes
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: SMT
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

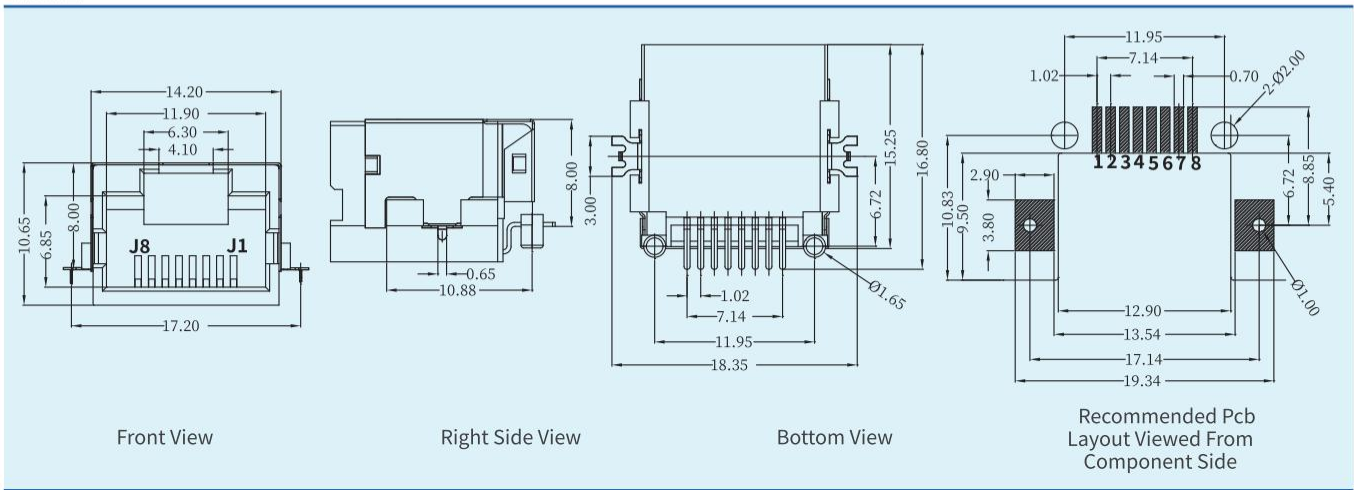

产品料号P/N:SYTCB851188GWW6SB1
产品规格Specifications:
类型Type: RJ45 Mid-mount panel mount connector
卡口方向Latch: Tab Up
接触端子Contact terminal: Phosphor bronze
是否带灯With LED: No
是否带金属壳With shielding: Yes
接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional
使用温度Operating temperature: -40~85°C
适用制程Application process: SMT
标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

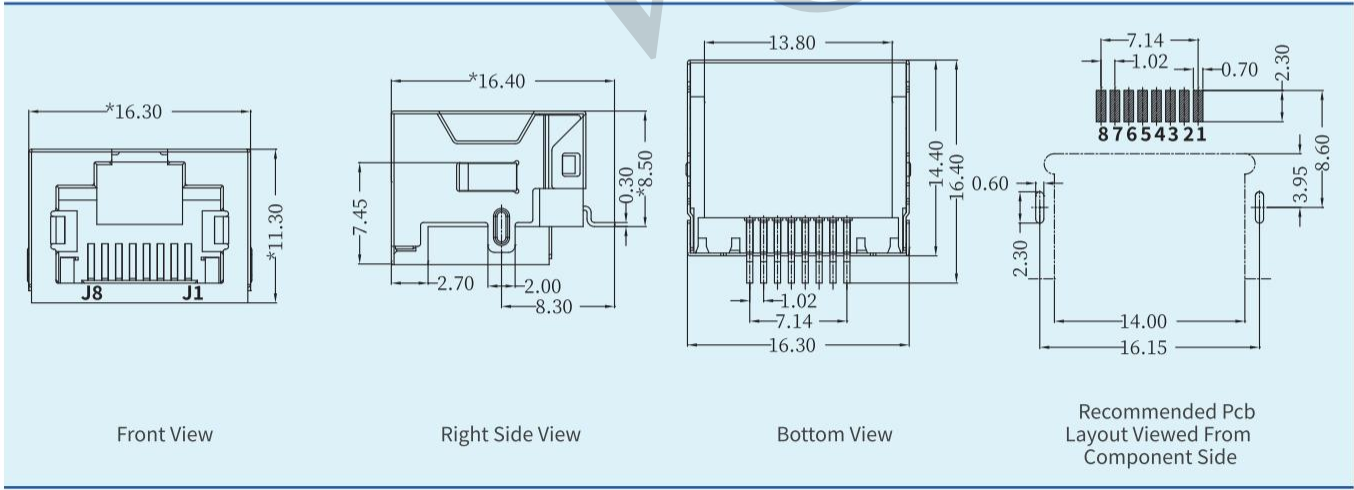



产品料号P/N:SYTCB861188GWA6SB1

产品规格Specifications:

类型Type: RJ45 Mid-mount panel mount connector

卡口方向Latch: Tab Down

接触端子Contact terminal: Phosphor bronze

是否带灯With LED: No

是否带金属壳With shielding: Yes


接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: SMT

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

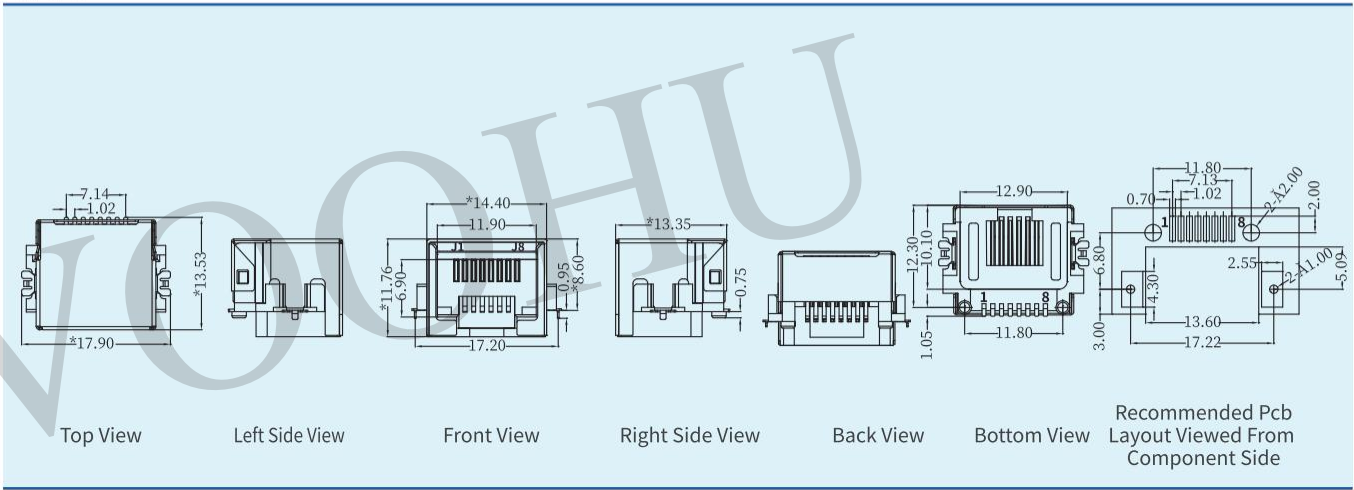

产品料号P/N:SYT56T1118GWA5SB4078

产品规格 Specifications:

类型Type: RJ45 Mid-mount panel mount connector

卡口方向Latch: Tab Down

接触端子Contact terminal: Phosphor bronze

是否带灯With LED: No

是否带金属壳With shielding: Yes

接触区电镀Gold plating on contact area: 6/15/30/50 Microinch optional

使用温度Operating temperature: -40~85°C

适用制程Application process: SMT

标准Standards: Compliance with IEEE 802.3/CE/FCC/RoHS/REACH/UL

结构图:

