



REACH & RoHS COMPLIANT

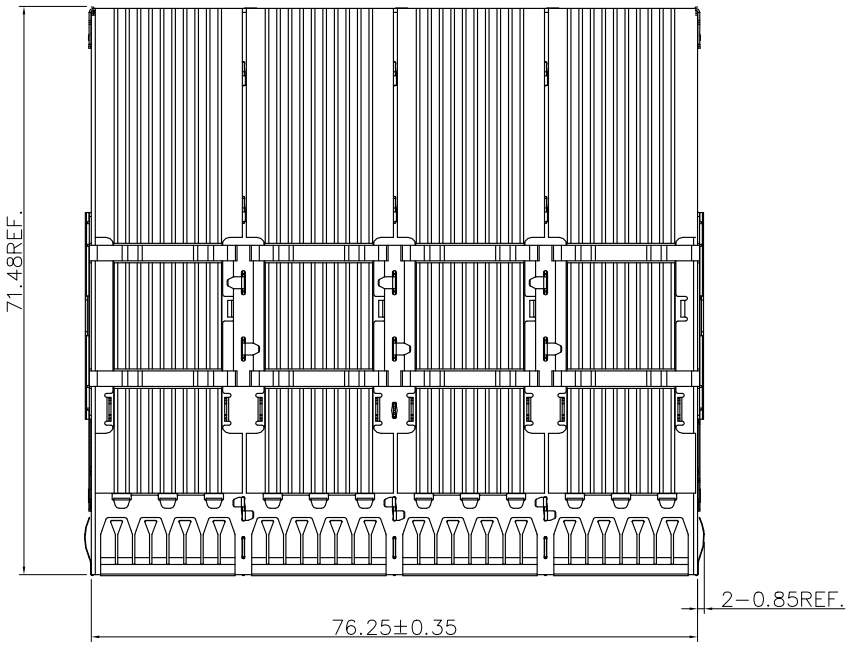

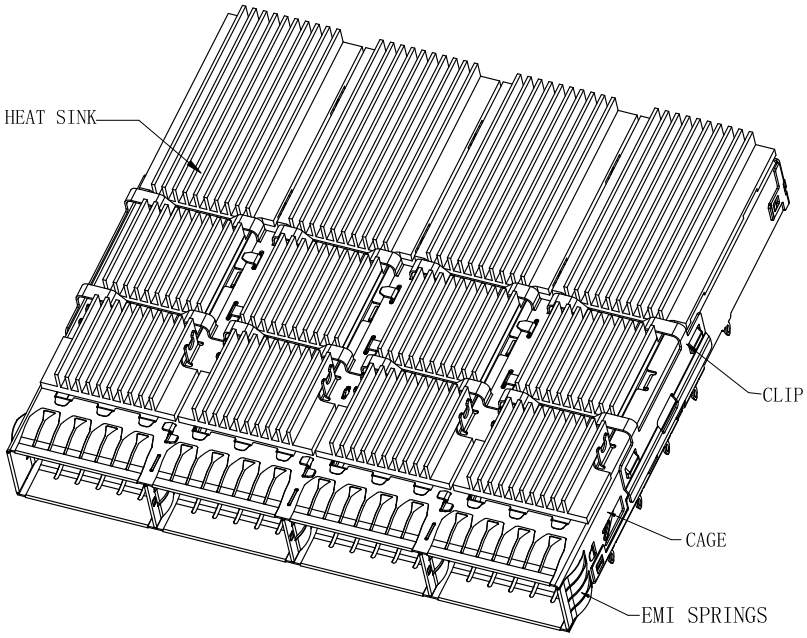

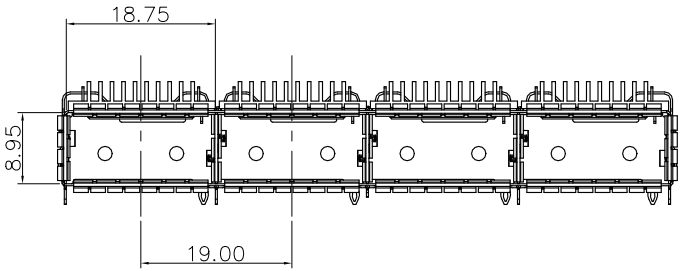


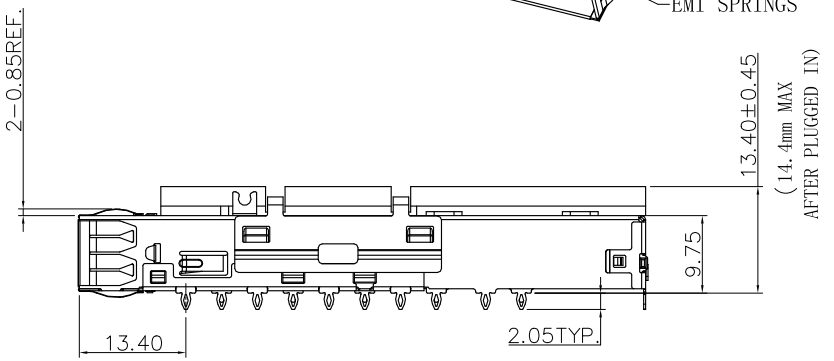


NOTES:
1. CAGE: STAINLESS STEEL
2. EMI SPRINGS: STAINLESS STEEL
3. HEAT SINK: NATURAL ANODIZE ALUMINUM ALLOY
4. CLIP: STAINLESS STEEL


VOOHU 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd	TITLE: QSFP-DD 1*4-PF-C03 W-HS	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
	PART NO.: WH81177004331	SCALE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY: Elvis.Song
				.x±0.30	.x°±2.0°	
TEL: +86 400 1048 018 WEB: WWW.VOOHU.CN	REMARK:	SHEET 1/4		.xx±0.25	.xx°±1.5°	DESIGNED BY: Sunny.Xu
				.xxx±0.10	.xxx°±1.0°	

REACH & RoHS COMPLIANT

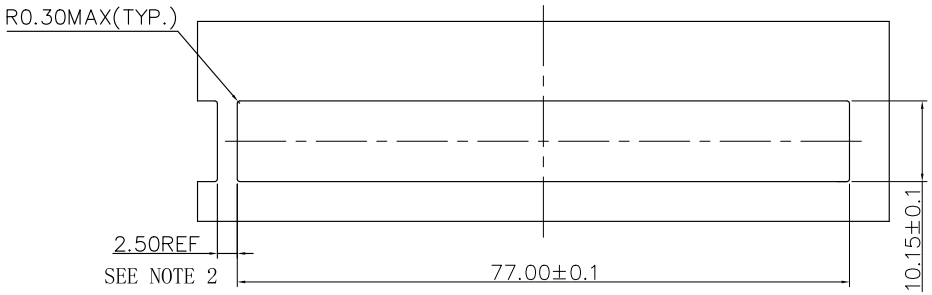


RECOMMENDED SINGLE SIDE PANEL DESIGN

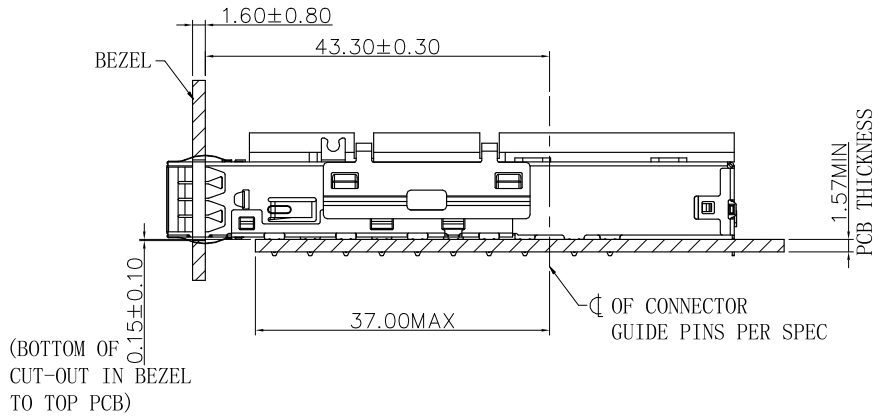

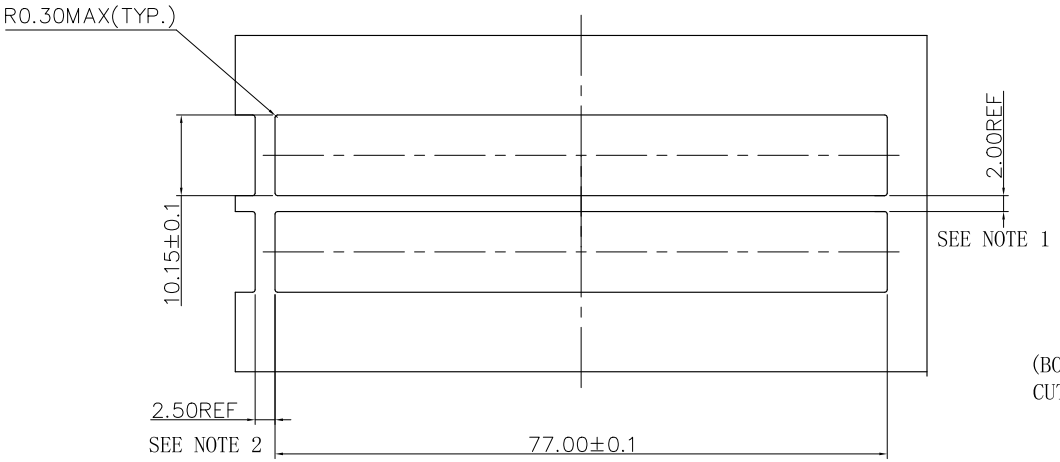


RECOMMENDED BELLY-TO-BELLY PANEL DESIGN

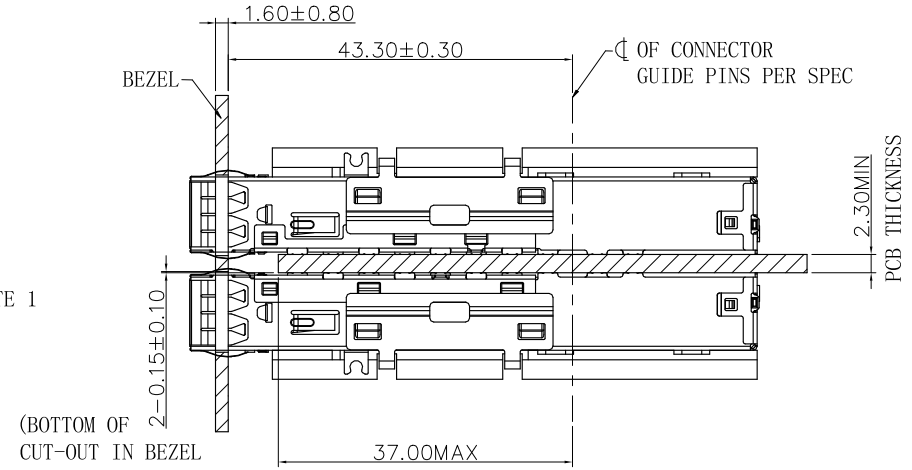


NOTE
1. PCB THICKNESS VARIATION MUST BE CONSIDERED WHEN DETERMINING BEZEL OPENING LOCATION.
2. THIS DIMENSION IS FOR REFERENCE ONLY. USER CAN MODIFY UT DEPENDS ON APPLICATION.
(THIS DIMENSION VARIES BASED ON DISTANCE OF "HOLE OF ADJACENT CAGE" ON PCB LAYOUT.

VOOHU 苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd	TITLE: QSFP-DD 1*4-PF-C03 W-HS	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
	PART NO.: WH81177004331	SCALE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY: Elvis.Song
				.x±0.30	.x°±2.0°	
TEL: +86 400 1048 018 WEB: WWW.VOOHU.CN	REMARK:	SHEET 2/4		.xx±0.25	.xx°±1.5°	DESIGNED BY: Sunny.Xu
				.xxx±0.10	.xxx°±1.0°	

REACH & RoHS COMPLIANT

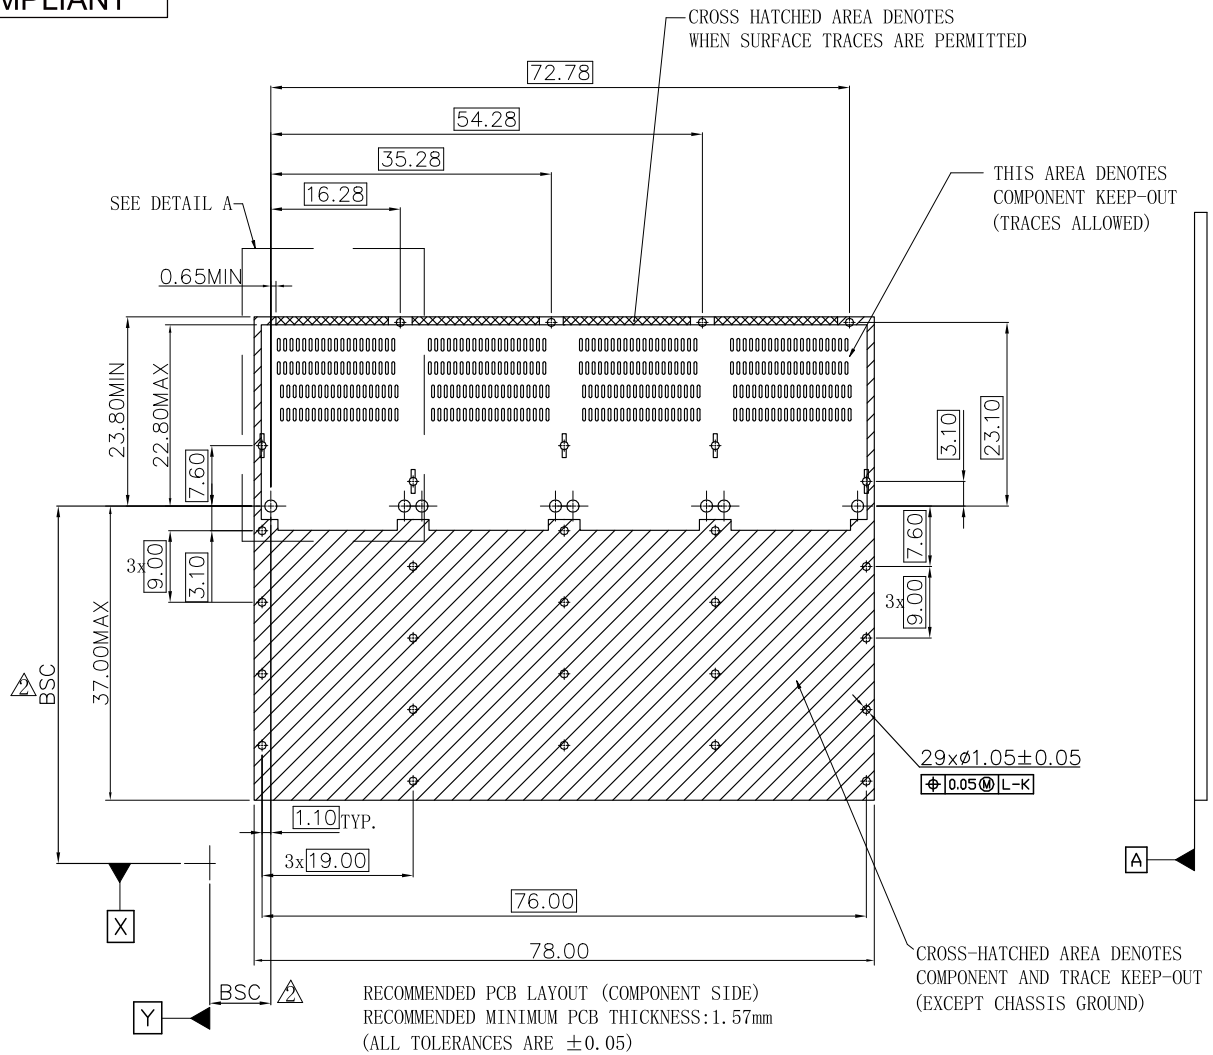

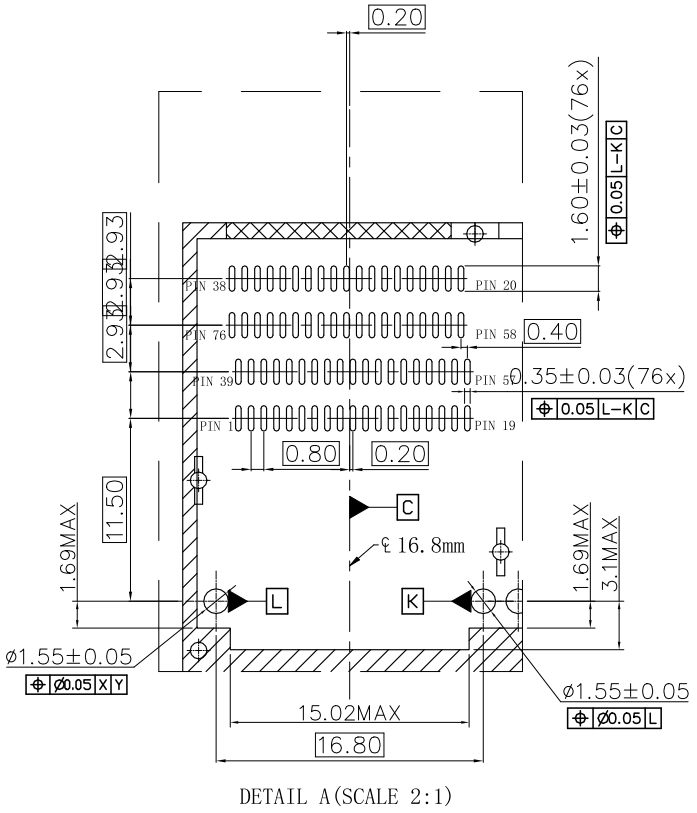


DETAIL A(SCALE 2:1)

NOTES:
1. DATUMS X AND Y ESTABLISHED BY CUSTOMER'S FIDUCIAL.
2. DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER


苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd	TITLE: QSFP-DD 1*4-PF-C03 W-HS	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED	APPROVED BY: Geoffrey.Song
	PART NO.: WH81177004331	SCALE 1:1	REV A0	x±0.35 / x°±3.0° / .x±0.30 / .x°±2.0°	CHECKED BY: Elvis.Song
TEL: +86 400 1048 018 WEB: WWW.VOOHU.CN	REMARK:	SHEET 3/4		.xx±0.25 / .xx°±1.5° / .xxx±0.10 / .xxx°±1.0°	DESIGNED BY: Sunny.Xu

REACH & RoHS COMPLIANT

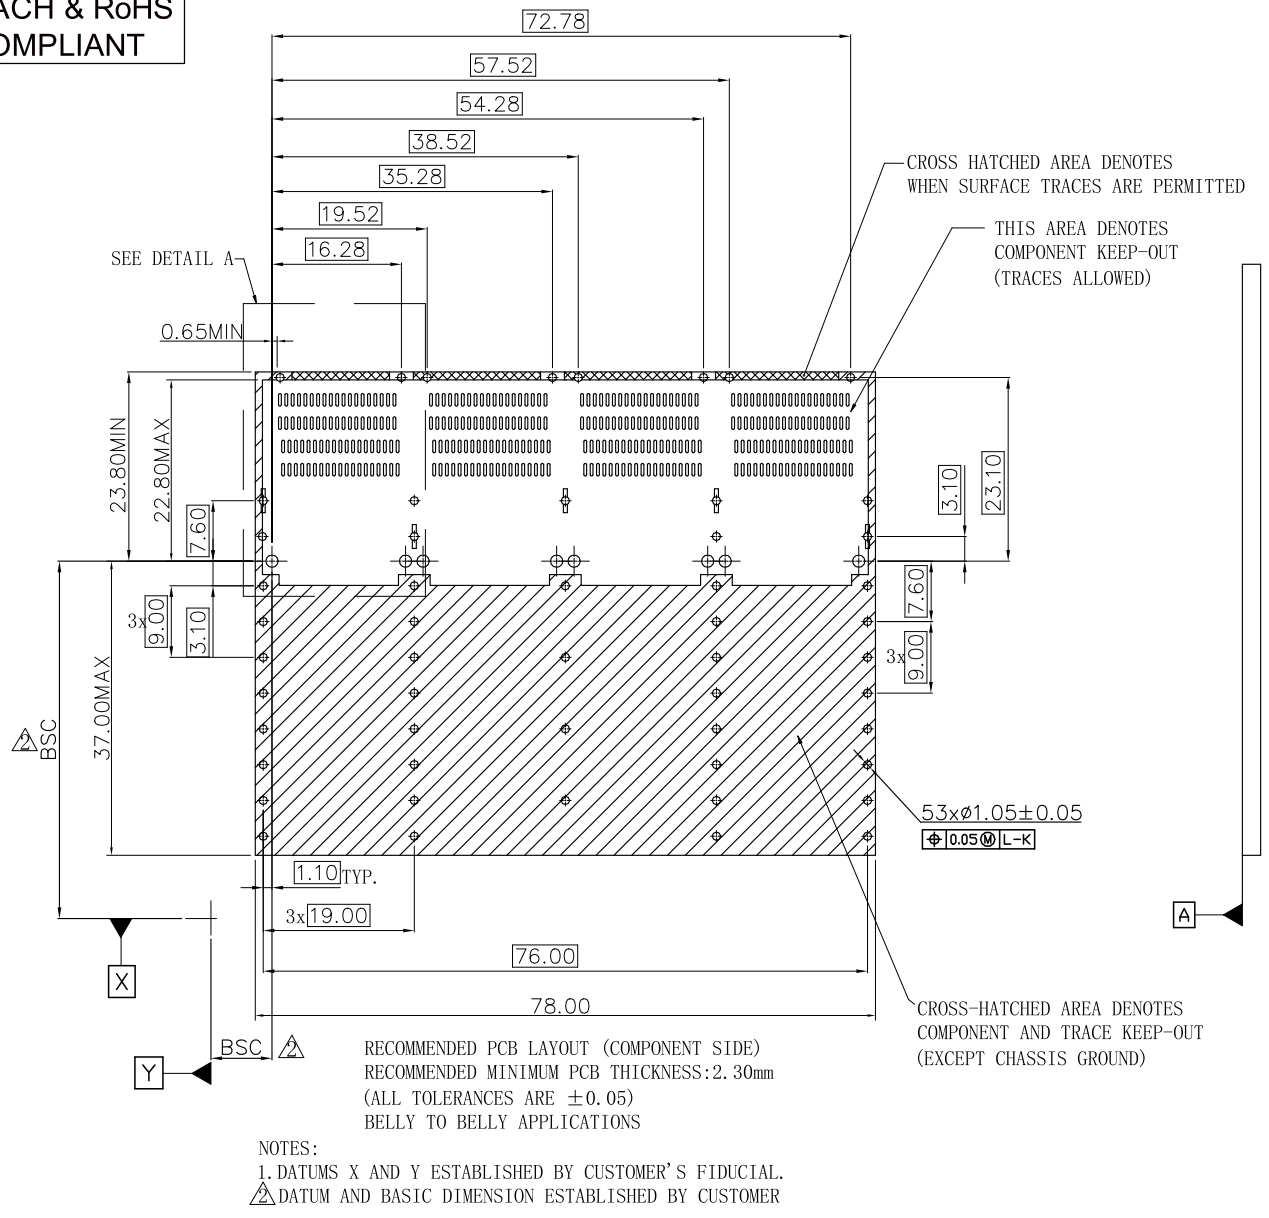

RECOMMENDED PCB LAYOUT (COMPONENT SIDE)
RECOMMENDED MINIMUM PCB THICKNESS:2.30mm
(ALL TOLERANCES ARE ±0.05)
BELLY TO BELLY APPLICATIONS

NOTES:
1. DATUMS X AND Y ESTABLISHED BY CUSTOMER'S FIDUCIAL.
2. DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER

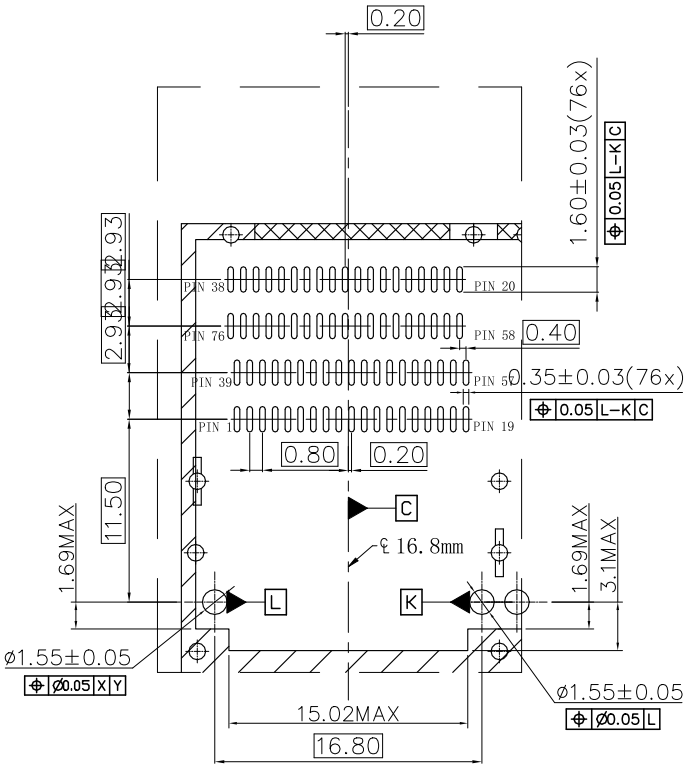

DETAIL A(SCALE 2:1)

苏州沃虎电子科技有限公司 Su Zhou Voohu Electronic Tech.Co.Ltd	TITLE: QSFP-DD 1*4-PF-C03 W-HS	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED	APPROVED BY: Geoffrey.Song
	PART NO.: WH81177004331	SCALE 1:1	REV A0	x±0.35 / x°±3.0° / .x±0.30 / .x°±2.0°	CHECKED BY: Elvis.Song
TEL: +86 400 1048 018 WEB: WWW.VOOHU.CN	REMARK:	SHEET 4/4		.xx±0.25 / .xx°±1.5° / .xxx±0.10 / .xxx°±1.0°	DESIGNED BY: Sunny.Xu